

# Dual 3A Low Quiescent Current High Efficiency Synchronous Buck Regulator

## ISL8033, ISL8033A

ISL8033 is a dual integrated power controller rated for 3A per channel with a 1MHz step-down regulator that is ideal for any low power low-voltage applications. The ISL8033A offers 2.5MHz operation for smaller more compacted design. The channels are 180° out-of-phase for input RMS current and EMI reduction. It is optimized for generating low output voltages down to 0.8V each. The supply voltage range is from 2.85V to 6V, allowing for the use of a single Li+ cell, three NiMH cells or a regulated 5V input. It has a guaranteed minimum output current of 3A each when ISET is connected to VDD. The output current of each output is selectable by setting ISET pin.

The ISL8033, ISL8033A includes a pair of low ON-resistance P-Channel and N-Channel internal MOSFETs to maximize efficiency and minimize external component count. 100% duty-cycle operation allows less than 250mV dropout voltage at 3A.

The ISL8033, ISL8033A offers an independent 1ms Power-Good (PG) timer at power-up. When shutdown, ISL8033, ISL8033A discharges the output capacitor. Other features include internal digital soft-start, enable for power sequence, controllable soft-stop output discharge during disabled, start-up with pre-biased output, 100% maximum duty cycle for lowest dropout, 100% duty cycle operation for smooth transition, less than 8µA logic controlled shutdown current, independent enable, overcurrent protection, and thermal shutdown.

The ISL8033, ISL8033A is offered in a 24 Ld 4mmx4mm QFN package with 1mm maximum height. The complete converter occupies less than 5.46cm<sup>2</sup> area.

## Features

- Dual 3A High Efficiency Synchronous Buck Regulator with up to 95% Efficiency
- 2% Output Accuracy Over-Temperature/Load/Line
- Internal Digital Soft-Start - 1.5ms
- External Synchronization up to 6MHz (ISL8033)
- Internal Current Mode Compensation
- Peak Current Limiting and Hiccup Mode Short Circuit Protection
- Adjustable Peak Overload Current
- Negative Current Protection
- Pb-Free (RoHS Compliant)

## Applications

- DC/DC POL Modules
- µC/µP, FPGA and DSP Power
- Plug-in DC/DC Modules for Routers and Switchers
- Test and Measurement Systems
- Li-ion Battery Power Devices
- Bar Code Readers

## Related Literature

- See [AN1606](#), ISL8033EVAL1Z Application Note
- See [AN1611](#), ISL8033EVAL2Z Application Note

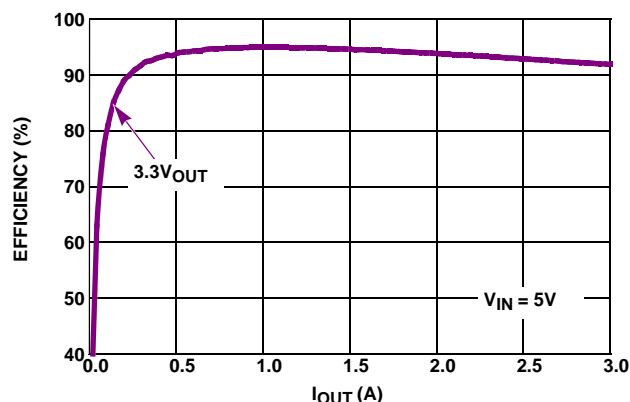


FIGURE 1. EFFICIENCY vs LOAD

# ISL8033, ISL8033A

## Typical Application Circuit

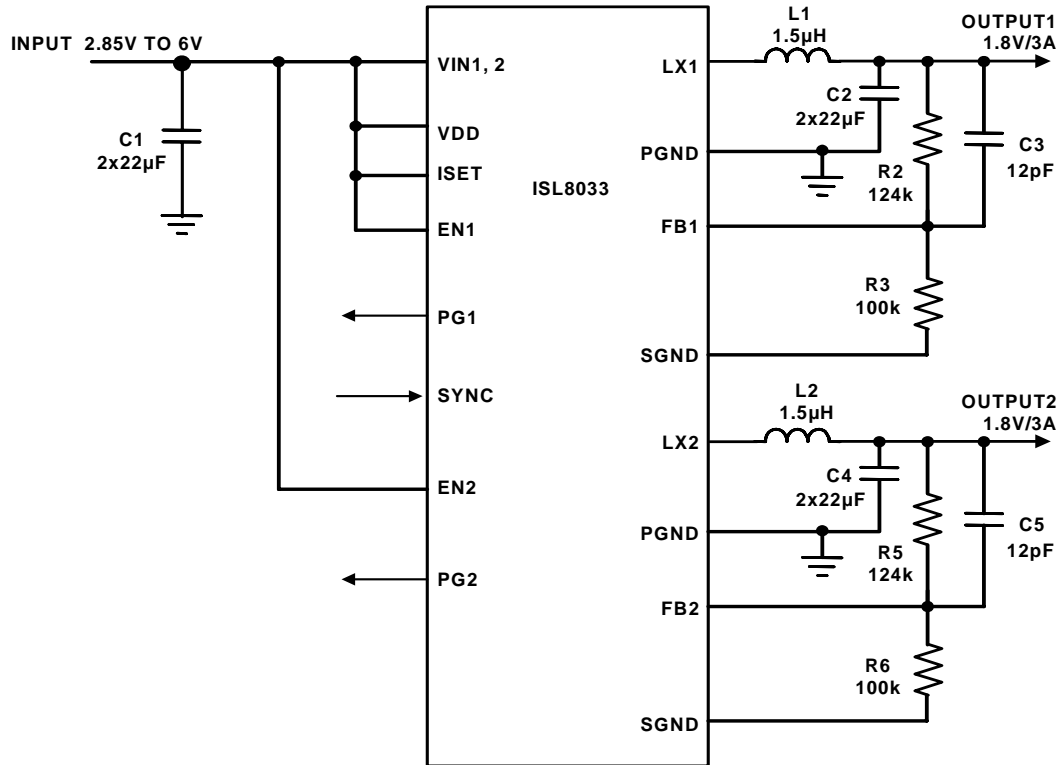


FIGURE 2. TYPICAL APPLICATION DIAGRAM - DUAL INDEPENDENT OUTPUTS

TABLE 1. ISL8033 COMPONENT VALUE SELECTION

| V <sub>OUT</sub> | 0.8V        | 1.2V        | 1.5V        | 1.8V        | 2.5V        | 3.3V        |
|------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| C1               | 2x22µF      | 2x22µF      | 2x22µF      | 2x22µF      | 2x22µF      | 2x22µF      |
| C2 (or C4)       | 2x22µF      | 2x22µF      | 2x22µF      | 2x22µF      | 2x22µF      | 2x22µF      |
| C3 (or C5)       | 12pF        | 12pF        | 12pF        | 12pF        | 12pF        | 12pF        |
| L1 (or L2)       | 1.0µH~2.2µH | 1.0µH~2.2µH | 1.0µH~2.2µH | 1.0µH~3.3µH | 1.0µH~3.3µH | 1.0µH~4.7µH |
| R2 (or R5)       | 0           | 50k         | 87.5k       | 124k        | 212.5k      | 312.5k      |
| R3 (or R6)       | 100k        | 100k        | 100k        | 100k        | 100k        | 100k        |

TABLE 2. ISL8033A COMPONENT VALUE SELECTION


| V <sub>OUT</sub> | 0.8V       | 1.2V       | 1.5V       | 1.8V       | 2.5V      | 3.3V      |
|------------------|------------|------------|------------|------------|-----------|-----------|
| C1               | 2x22µF     | 2x22µF     | 2x22µF     | 2x22µF     | 2x22µF    | 2x22µF    |
| C2 (or C4)       | 2x22µF     | 2x22µF     | 2x22µF     | 2x22µF     | 2x22µF    | 2x22µF    |
| C3 (or C5)       | 12pF       | 12pF       | 12pF       | 12pF       | 12pF      | 12pF      |
| L1 (or L2)       | 0.47~1.5µH | 0.47~1.5µH | 0.47~1.5µH | 0.47~1.5µH | 1.0~2.2µH | 1.0~3.3µH |
| R2 (or R5)       | 0          | 50k        | 87.5k      | 124k       | 212.5k    | 312.5k    |
| R3 (or R6)       | 100k       | 100k       | 100k       | 100k       | 100k      | 100k      |

NOTE: The minimum output capacitor value is given for different output voltage to make sure the whole converter system is stable. Output capacitance should increase to support faster load transient requirement.

TABLE 3. SUMMARY OF DIFFERENCES

| PART NUMBER | SWITCHING FREQUENCY   |
|-------------|---|
| ISL8033     | Internally fixed switching frequency F <sub>SW</sub> = 1MHz   |
| ISL8033A    | Internally fixed switching frequency F <sub>SW</sub> = 2.5MHz |


## Block Diagram

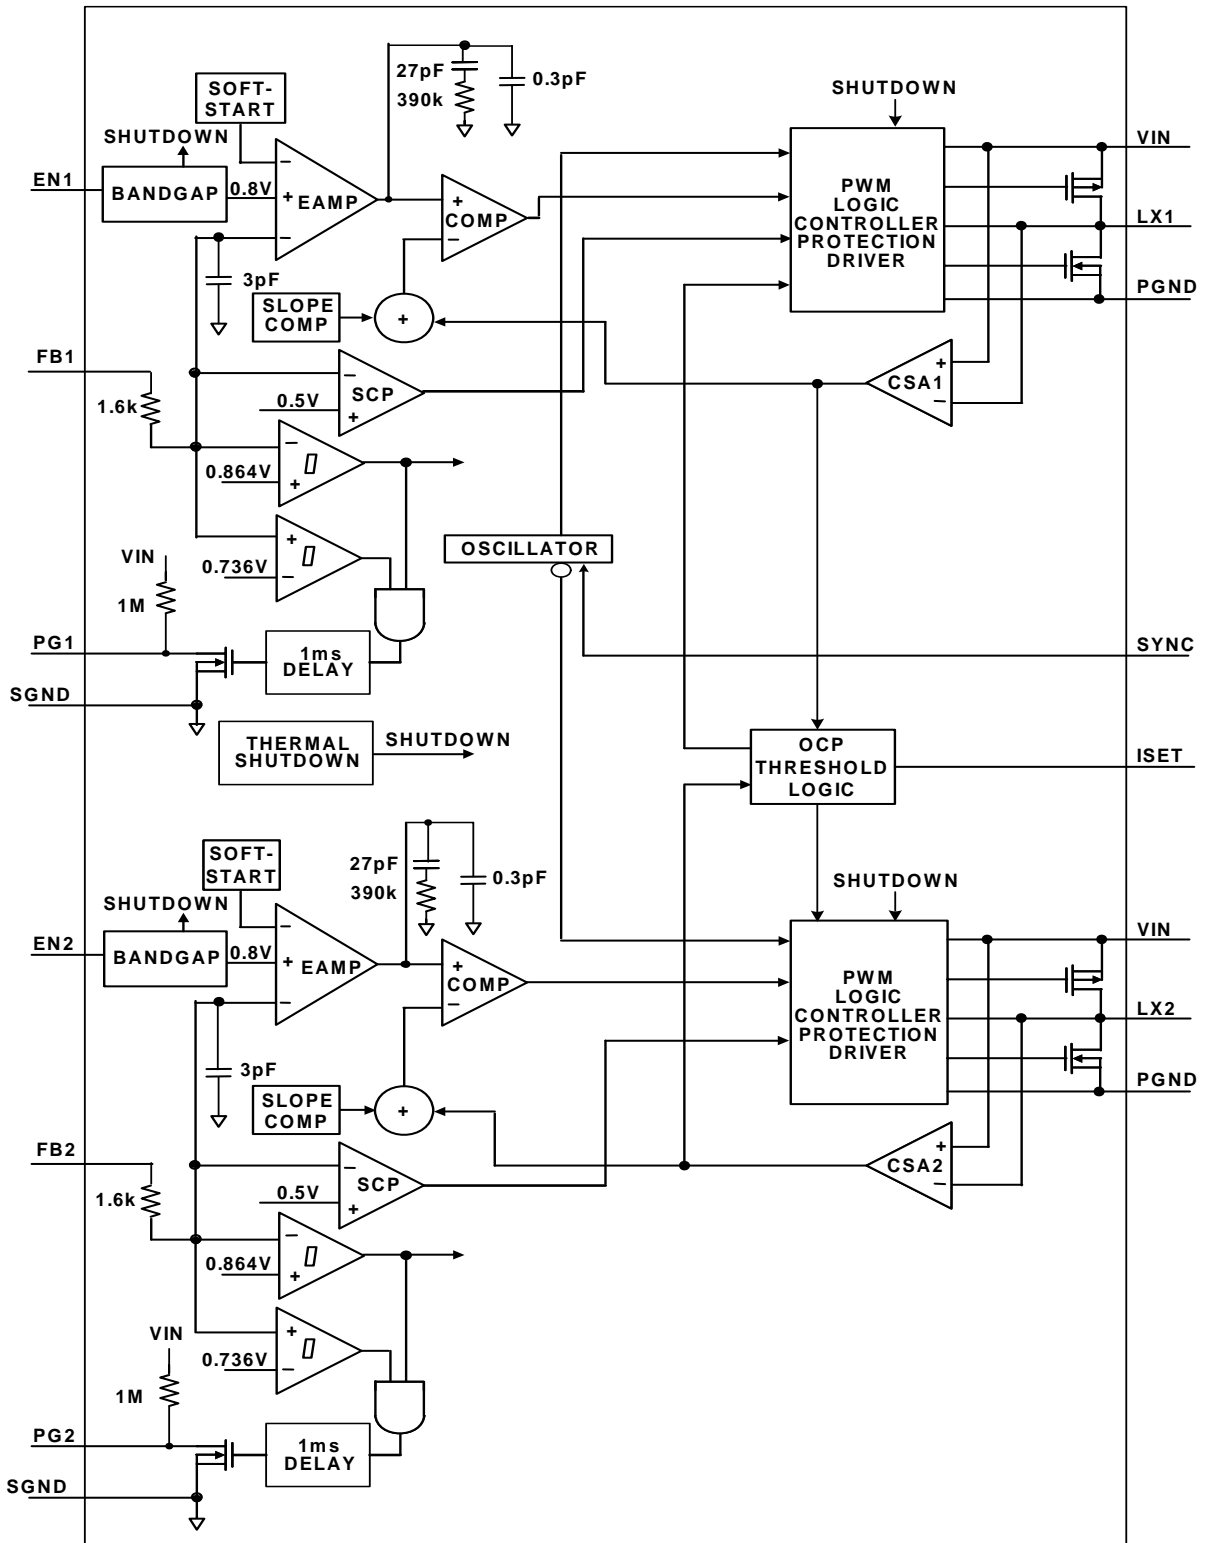

# ISL8033, ISL8033A

## Pin Configuration

ISL8033, ISL8033A  
(24 LD QFN)  
TOP VIEW

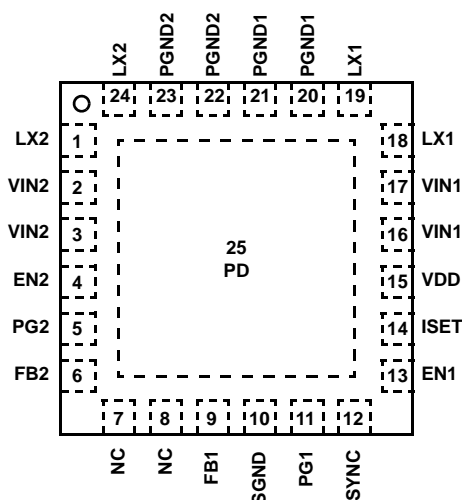

## Pin Descriptions

| PIN NUMBER | SYMBOL | DESCRIPTION   |
|------------|--------|---|
| 1, 24      | LX2    | Switching node connection for Channel 2. Connect to one terminal of inductor for VOUT2.   |
| 22, 23     | PGND2  | Negative supply for the power stage of Channel 2.   |
| 4          | EN2    | Regulator Channel 2 enable pin. Enable the output, VOUT2, when driven to high. Shutdown the VOUT2 and discharge output capacitor when driven to low. Do not leave this pin floating.  |
| 5          | PG2    | 1ms timer output. At power-up or EN HI, this output is a 1ms delayed Power-Good signal for the VOUT2 voltage.   |
| 6          | FB2    | The feedback network of the Channel 2 regulator. FB2 is the negative input to the transconductance error amplifier. The output voltage is set by an external resistor divider connected to FB2. With a properly selected divider, the output voltage can be set to any voltage between the power rail (reduced by converter losses) and the 0.8V reference. There is an internal compensation to meet a typical application. In addition, the regulator power-good and undervoltage protection circuitry use FB2 to monitor the Channel 2 regulator output voltage. |
| 7, 8       | NC     | No connect pins. Please tie to GROUND.  |
| 9          | FB1    | The feedback network of the Channel 1 regulator. FB1 is the negative input to the transconductance error amplifier. The output voltage is set by an external resistor divider connected to FB1. With a properly selected divider, the output voltage can be set to any voltage between the power rail (reduced by converter losses) and the 0.8V reference. There is an internal compensation to meet a typical application. In addition, the regulator power-good and undervoltage protection circuitry use FB1 to monitor the Channel 1 regulator output voltage. |
| 10         | SGND   | System ground. Make a single point connection from these pins to PGND.  |
| 11         | PG1    | 1ms timer output. At power-up or EN HI, this output is a 1ms delayed Power-Good signal for the VOUT1 voltage.   |
| 12         | SYNC   | Connect to logic high or input voltage VIN. Connect to an external function generator for external Synchronization. Negative edge trigger. Do not leave this pin floating. <b>Do not tie this pin low (or to SGND).</b>   |
| 13         | EN1    | Regulator Channel 1 enable pin. Enable the output, VOUT1, when driven to high. Shutdown the VOUT1 and discharge output capacitor when driven to low. Do not leave this pin floating.  |
| 14         | ISET   | ISET is the output current limit setting of the regulators. See the “” table on page 6 for settings.  |
| 15         | VDD    | Input supply voltage for the logic. Connect VIN pin.  |
| 20, 21     | PGND1  | Negative supply for the power stage of Channel 1.   |

# ISL8033, ISL8033A

## Pin Descriptions (Continued)

| PIN NUMBER      | SYMBOL        | DESCRIPTION   |
|-----------------|---------------|---|
| 18, 19          | LX1           | Switching node connection for Channel 1. Connect to one terminal of inductor for VOUT1.   |
| 2, 3,<br>16, 17 | VIN2,<br>VIN1 | Input supply voltage. Connect a 22 $\mu$ F ceramic capacitor to power-ground per channel.   |
| 25              | PD            | The exposed pad must be connected to the PGND pin for proper electrical performance. Add as much vias as possible under this pad for optimal thermal performance. |

## Ordering Information

| PART NUMBER<br>(Notes 1, 2, 3) | PART<br>MARKING | TEMP. RANGE<br>(°C) | PACKAGE<br>(Pb-free) | PKG.<br>DWG. # |
|--------------------------------|-----------------|---------------------|----------------------|----------------|
| ISL8033IRZ*                    | 80 33IRZ        | -40 to +85          | 24 Ld 4x4 QFN        | L24.4x4D       |
| ISL8033AIRZ*                   | 80 33AIRZ       | -40 to +85          | 24 Ld 4x4 QFN        | L24.4x4D       |

### NOTES:

1. Add "-T\*" suffix for tape and reel. Please refer to [TB347](#) for details on reel specifications.
2. These Intersil Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
3. For Moisture Sensitivity Level (MSL), please see device information page for [ISL8033](#), [ISL8033A](#). For more information on MSL, please see Technical Brief [TB363](#).

# ISL8033, ISL8033A

## Absolute Maximum Ratings (Reference to SGND)

|  |  |
|--|--|
| VIN1, VIN2, VDD                                  | -0.3V to 6.5V (DC) or 7V (20ms)                    |
| LX1, LX2   | -1.5V (100ns)/-0.3V (DC) to 6.5V (DC) or 7V (20ms) |
| EN1, EN2, PG1, PG2, SYNC, ISET                   | -0.3V to +6.5V                                     |
| FB1, FB2   | -0.3V to 2.7V                                      |
| NC   | -0.3V to 0.3V                                      |
| <b>ESD Ratings</b>                               |  |
| Human Body Model (Tested per JESD22-A114)        | 4kV  |
| Charged Device Model (Tested per JESD22-C101E)   | 2kV  |
| Machine Model (Tested per JESD22-A115)           | 0.3kV  |
| Latch Up (Tested per JESD-78A; Class 2, Level A) | 100mA  |

## Thermal Information

|                              |   |                      |
|------------------------------|---|----------------------|
| Thermal Resistance (Typical) | $\theta_{JA}$ (°C/W)  | $\theta_{JC}$ (°C/W) |
| 4x4 QFN Package (Notes 4, 5) | 36  | 2                    |
| Junction Temperature Range   | -55°C to +150°C   |                      |
| Storage Temperature Range    | -65°C to +150°C   |                      |
| Ambient Temperature Range    | -40°C to +85°C  |                      |
| Pb-Free Reflow Profile       | see link below<br><a href="http://www.intersil.com/pbfree/Pb-FreeReflow.asp">http://www.intersil.com/pbfree/Pb-FreeReflow.asp</a> |                      |

## Recommended Operating Conditions

|                                |                 |
|--------------------------------|-----------------|
| VIN Supply Voltage Range       | 2.85V to 6V     |
| Load Current Range per Channel | 0A to 3A        |
| Junction Temperature Range     | -55°C to +125°C |

**CAUTION:** Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

### NOTES:

- $\theta_{JA}$  is measured in free air with the component mounted on a high effective thermal conductivity test board with "direct attach" features. See Tech Brief TB379.
- For  $\theta_{JC}$ , the "case temp" location is the center of the exposed metal pad on the package underside.

## Electrical Specifications

Unless otherwise noted, the typical specifications are measured at the following conditions:  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ,  $V_{IN} = 3.6\text{V}$ ,  $EN1 = EN2 = VDD$ ,  $L = 1.5\mu\text{H}$ ,  $C1 = C2 = C4 = 2 \times 22\mu\text{F}$ ,  $I_{OUT1} = I_{OUT2} = 0\text{A}$  to  $3\text{A}$ . Typical values are at  $T_A = +25^\circ\text{C}$ . **Boldface limits apply over the operating temperature range,  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$ .**

| PARAMETER                          | SYMBOL       | TEST CONDITIONS   | MIN<br>(Note 7) | TYP                        | MAX<br>(Note 7) | UNITS           |
|------------------------------------|--------------|---|-----------------|----------------------------|-----------------|-----------------|
| <b>INPUT SUPPLY</b>                |              |   |                 |                            |                 |                 |
| VIN Undervoltage Lockout Threshold | $V_{UVLO}$   | Rising  |                 | 2.5                        | <b>2.85</b>     | V               |
|                                    |              | Hysteresis  | <b>50</b>       | 100                        |                 | mV              |
| Quiescent Supply Current           | $I_{VDD}$    | SYNC = VDD, EN1 = EN2 = VDD,<br>$F_S = 1\text{MHz}$ , no load at the output   |                 | 15                         | <b>40</b>       | mA              |
|                                    |              | SYNC = VDD, EN1 = EN2 = VDD,<br>$F_S = 2.5\text{MHz}$ , no load at the output |                 | 30                         | <b>70</b>       | mA              |
|                                    |              | Shutdown Supply Current   | $I_{SD}$        | VDD = 6V, EN1 = EN2 = SGND |                 | 8               |
| <b>OUTPUT REGULATION</b>           |              |   |                 |                            |                 |                 |
| FB1, FB2 Regulation Voltage        | $V_{FB}$     |   | <b>0.790</b>    | 0.8                        | <b>0.810</b>    | V               |
| FB1, FB2 Bias Current              | $I_{FB}$     | VFB = 0.75V   |                 | 0.1                        |                 | $\mu\text{A}$   |
| Load Regulation                    |              | SYNC = VDD, output load from 0A to 3A   |                 | 2                          |                 | mV/A            |
| Line Regulation                    |              | VIN = VO + 0.5V to 6V (minimal 2.85V)   |                 | 0.1                        |                 | %/V             |
| Soft-Start Ramp Time Cycle         |              |   |                 | 1.5                        |                 | ms              |
| <b>COMPENSATION</b>                |              |   |                 |                            |                 |                 |
| Error Amplifier Trans-Conductance  |              |   |                 | 20                         |                 | $\mu\text{A/V}$ |
| Trans-Resistance                   | RT           |   | <b>0.18</b>     | 0.2                        | <b>0.22</b>     | $\Omega$        |
| <b>OVERCURRENT PROTECTION</b>      |              |   |                 |                            |                 |                 |
| Dynamic Current Limit ON-time      | $t_{OC ON}$  |   |                 | 17                         |                 | Clock pulses    |
| Dynamic Current Limit OFF-time     | $t_{OC OFF}$ |   |                 | 8                          |                 | SS cycle        |

# ISL8033, ISL8033A

## Electrical Specifications

Unless otherwise noted, the typical specifications are measured at the following conditions:

$T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ,  $V_{IN} = 3.6\text{V}$ ,  $EN1 = EN2 = \text{VDD}$ ,  $L = 1.5\mu\text{H}$ ,  $C1 = C2 = C4 = 2 \times 22\mu\text{F}$ ,  $I_{OUT1} = I_{OUT2} = 0\text{A}$  to  $3\text{A}$ . Typical values are at  $T_A = +25^\circ\text{C}$ .

**Boldface limits apply over the operating temperature range,  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$ . (Continued)**

| PARAMETER                                | SYMBOL     | TEST CONDITIONS                                | MIN<br>(Note 7) | TYP  | MAX<br>(Note 7) | UNITS            |
|--|------------|--|-----------------|------|-----------------|------------------|
| Positive Peak Overcurrent Limit          | $I_{poc1}$ | ISET = VDD                                     | <b>4.1</b>      | 4.8  | <b>5.5</b>      | A                |
|  | $I_{poc2}$ |  | <b>4.1</b>      | 4.8  | <b>5.5</b>      | A                |
|  | $I_{poc1}$ | ISET = Float                                   | <b>4.1</b>      | 4.8  | <b>5.5</b>      | A                |
|  | $I_{poc2}$ |  | <b>2.7</b>      | 3.3  | <b>3.9</b>      | A                |
|  | $I_{poc1}$ | ISET = GND                                     | <b>2.7</b>      | 3.3  | <b>3.9</b>      | A                |
|  | $I_{poc2}$ |  | <b>2.7</b>      | 3.3  | <b>3.9</b>      | A                |
| Negative Peak Overcurrent Limit          | $I_{noc1}$ |  | <b>-3.5</b>     | -2.5 | <b>-1.5</b>     | A                |
|  | $I_{noc2}$ |  | <b>-3.5</b>     | -2.5 | <b>-1.5</b>     | A                |
| <b>LX1, LX2</b>                          |            |  |                 |      |                 |                  |
| P-Channel MOSFET ON-Resistance           |            | $V_{IN} = 6\text{V}$ , $I_O = 200\text{mA}$    |                 | 50   | <b>75</b>       | m $\Omega$       |
|  |            | $V_{IN} = 2.85\text{V}$ , $I_O = 200\text{mA}$ |                 | 70   | <b>100</b>      | m $\Omega$       |
| N-Channel MOSFET ON-Resistance           |            | $V_{IN} = 6\text{V}$ , $I_O = 200\text{mA}$    |                 | 50   | <b>75</b>       | m $\Omega$       |
|  |            | $V_{IN} = 2.85\text{V}$ , $I_O = 200\text{mA}$ |                 | 70   | <b>100</b>      | m $\Omega$       |
| LX_ Maximum Duty Cycle                   |            |  |                 | 100  |                 | %                |
| PWM Switching Frequency                  | $F_S$      | ISL8033  | <b>0.88</b>     | 1.1  | <b>1.32</b>     | MHz              |
|  |            | ISL8033A                                       | <b>2.15</b>     | 2.5  | <b>2.85</b>     | MHz              |
| Synchronization Range                    | $F_{SYNC}$ | ISL8033 (Note 6)                               | <b>2.64</b>     |      | <b>6</b>        | MHz              |
| Channel 1 to Channel 2 Phase Shift       |            | Rising edge to rising edge timing              |                 | 180  |                 | $^\circ$         |
| LX Minimum On-Time                       |            | SYNC = High (forced PWM mode)                  |                 |      | <b>140</b>      | ns               |
| Soft Discharge Resistance                | $R_{DIS}$  | EN = LOW                                       | <b>80</b>       | 100  | <b>120</b>      | $\Omega$         |
| LX Leakage Current                       |            | Pulled up to 6V                                |                 | 0.1  | <b>1</b>        | $\mu\text{A}$    |
| <b>PG1, PG2</b>                          |            |  |                 |      |                 |                  |
| Output Low Voltage                       |            | Sinking 1mA, VFB = 0.7V                        |                 |      | <b>0.3</b>      | V                |
| PG_ Pin Leakage Current                  |            | PG = $V_{IN} = 6\text{V}$                      |                 | 0.01 | <b>0.1</b>      | $\mu\text{A}$    |
| Internal PGOOD Low Rising Threshold      |            | Percentage of nominal regulation voltage       | <b>89.5</b>     | 92   | <b>94.5</b>     | %                |
| Internal PGOOD Low Falling Threshold     |            | Percentage of nominal regulation voltage       | <b>85</b>       | 88   | <b>91</b>       | %                |
| Delay Time (Rising Edge)                 |            |  |                 | 1    |                 | ms               |
| Internal PGOOD Delay Time (Falling Edge) |            |  |                 | 7    | <b>10</b>       | $\mu\text{s}$    |
| <b>EN1, EN2, SYNC</b>                    |            |  |                 |      |                 |                  |
| Logic Input Low                          |            |  |                 |      | <b>0.4</b>      | V                |
| Logic Input High                         |            |  | <b>1.5</b>      |      |                 | V                |
| SYNC Logic Input Leakage Current         | $I_{SYNC}$ | Pulled up to 6V                                |                 | 0.1  | <b>1</b>        | $\mu\text{A}$    |
| Enable Logic Input Leakage Current       | $I_{EN}$   | Pulled up to 6V                                |                 | 0.1  | <b>1</b>        | $\mu\text{A}$    |
| Thermal Shutdown                         |            |  |                 | 150  |                 | $^\circ\text{C}$ |
| Thermal Shutdown Hysteresis              |            |  |                 | 25   |                 | $^\circ\text{C}$ |

### NOTES:

- The operational frequency per switching channel will be half of the SYNC frequency.
- Compliance to datasheet limits is assured by one or more methods: production test, characterization and/or design.

## Typical Operating Performance ISL8033

Unless otherwise noted, operating conditions are:  $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 5\text{V}$ ,  $EN = V_{IN}$ ,  $L1 = L2 = 1.5\mu\text{H}$ ,  $C1 = C2 = C4 = 2 \times 22\mu\text{F}$ ,  $V_{OUT1} = 1.2\text{V}$ ,  $V_{OUT2} = 1.8\text{V}$ ,  $I_{OUT1} = I_{OUT2} = 0\text{A to } 3\text{A}$ .

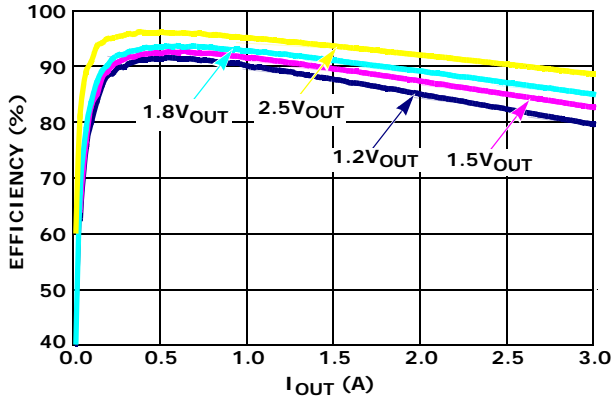


FIGURE 3. EFFICIENCY,  $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 3.3\text{V}$

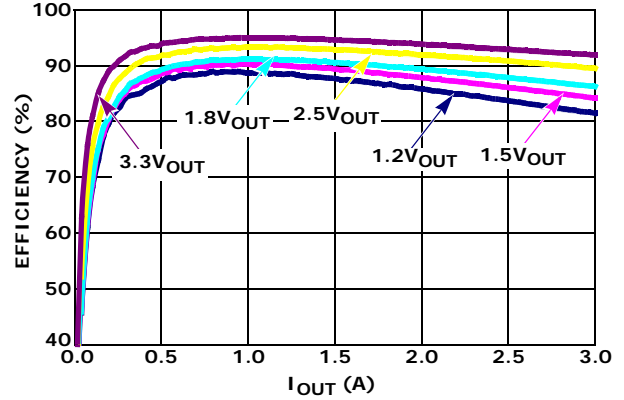


FIGURE 4. EFFICIENCY,  $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 5\text{V}$

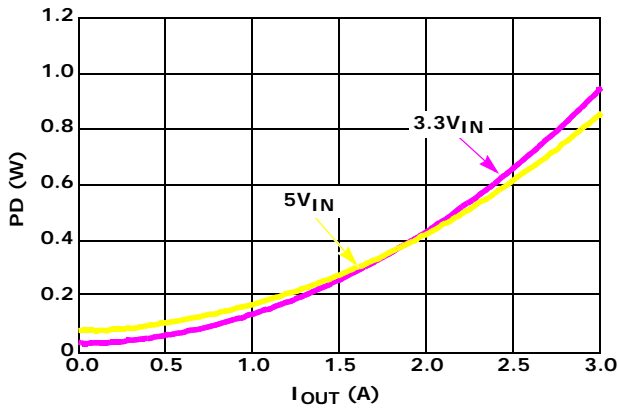


FIGURE 5. POWER DISSIPATION,  $T_A = +25^\circ\text{C}$ ,  $V_{OUT} = 1.8\text{V}$

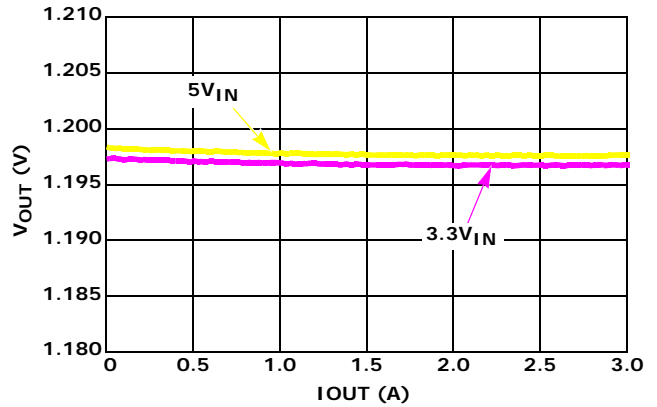


FIGURE 6. LOAD REGULATION,  $V_{OUT} = 1.2\text{V}$ ,  $T_A = +25^\circ\text{C}$

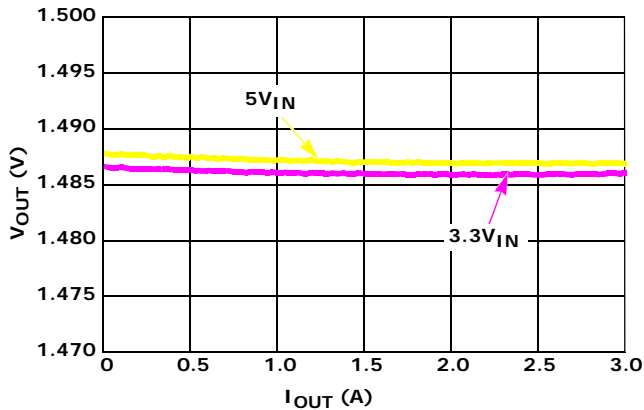


FIGURE 7. LOAD REGULATION,  $V_{OUT} = 1.5\text{V}$ ,  $T_A = +25^\circ\text{C}$

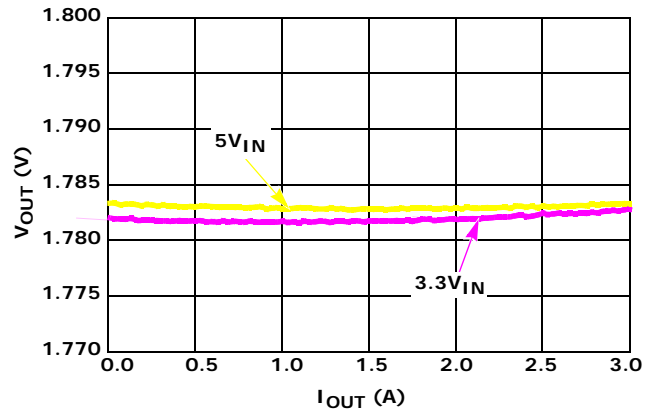


FIGURE 8. LOAD REGULATION,  $V_{OUT} = 1.8\text{V}$ ,  $T_A = +25^\circ\text{C}$



## Typical Operating Performance ISL8033

Unless otherwise noted, operating conditions are:  $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 5\text{V}$ ,  $EN = V_{IN}$ ,  $L1 = L2 = 1.5\mu\text{H}$ ,  $C1 = C2 = C4 = 2 \times 22\mu\text{F}$ ,  $V_{OUT1} = 1.2\text{V}$ ,  $V_{OUT2} = 1.8\text{V}$ ,  $I_{OUT1} = I_{OUT2} = 0\text{A to } 3\text{A}$ . (Continued)

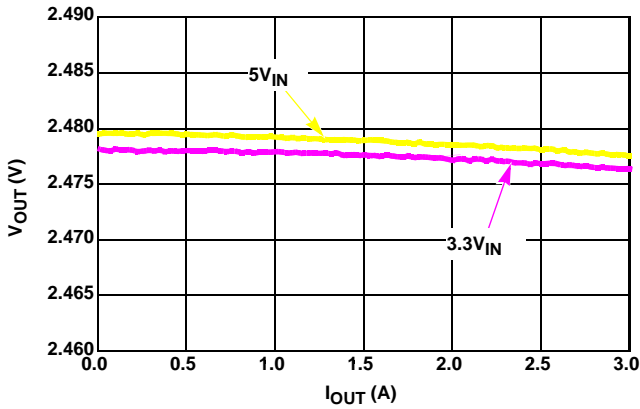


FIGURE 9. LOAD REGULATION,  $V_{OUT} = 2.5\text{V}$   $T_A = +25^\circ\text{C}$

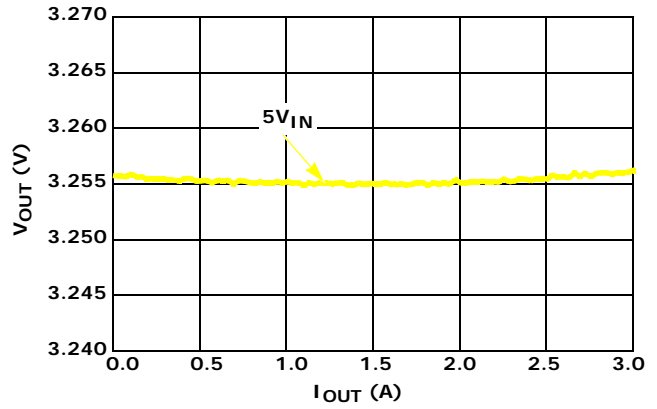


FIGURE 10. LOAD REGULATION,  $V_{OUT} = 3.3\text{V}$   $T_A = +25^\circ\text{C}$

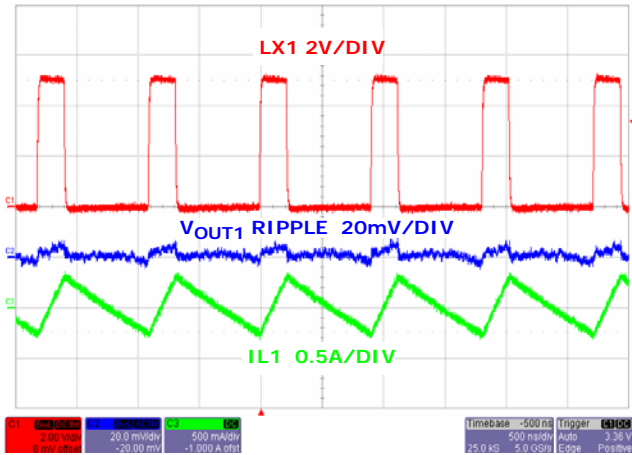


FIGURE 11. STEADY STATE OPERATION AT NO LOAD CHANNEL 1 (PWM)

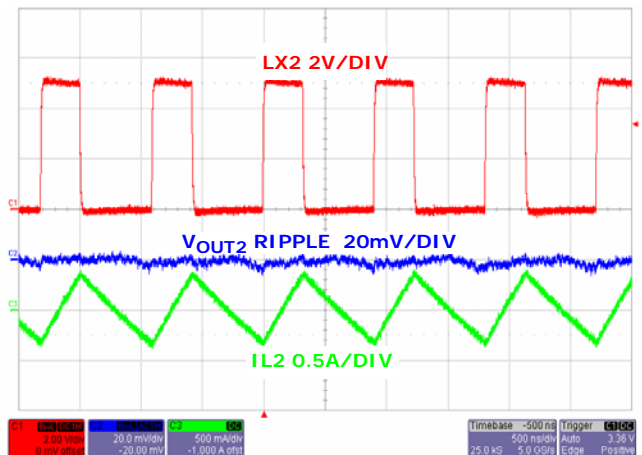


FIGURE 12. STEADY STATE OPERATION AT NO LOAD CHANNEL 2 (PWM)

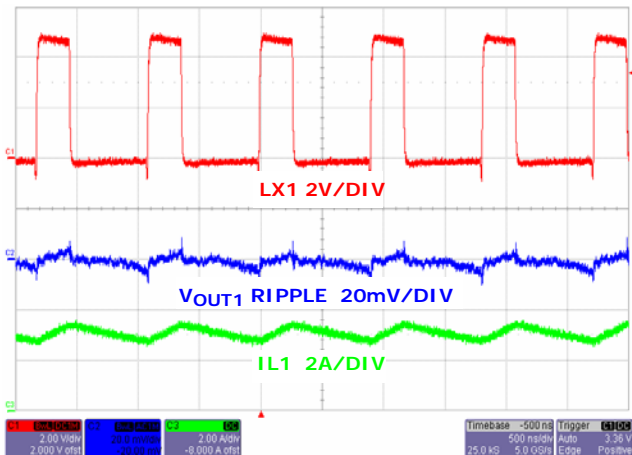


FIGURE 13. STEADY STATE OPERATION WITH FULL LOAD CHANNEL 1

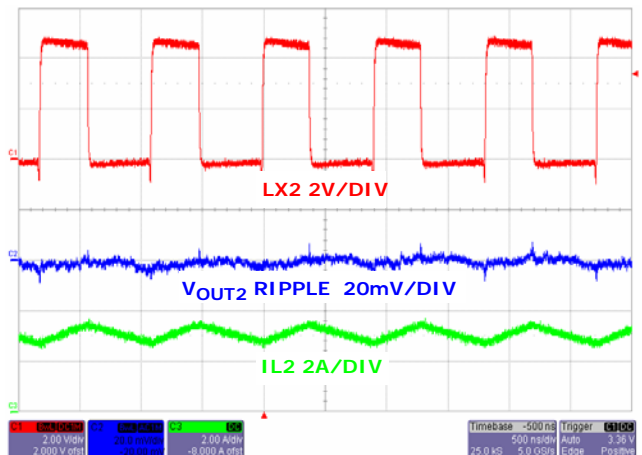


FIGURE 14. STEADY STATE OPERATION WITH FULL LOAD CHANNEL 2

## Typical Operating Performance ISL8033

Unless otherwise noted, operating conditions are:  $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 5\text{V}$ ,  $\text{EN} = V_{IN}$ ,  $L1 = L2 = 1.5\mu\text{H}$ ,  $C1 = C2 = C4 = 2 \times 22\mu\text{F}$ ,  $V_{OUT1} = 1.2\text{V}$ ,  $V_{OUT2} = 1.8\text{V}$ ,  $I_{OUT1} = I_{OUT2} = 0\text{A to } 3\text{A}$ . (Continued)

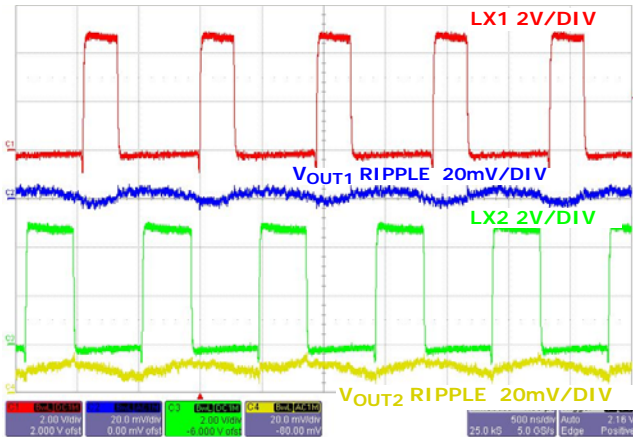


FIGURE 15. STEADY STATE OPERATION WITH FULL LOADS AT BOTH CHANNELS

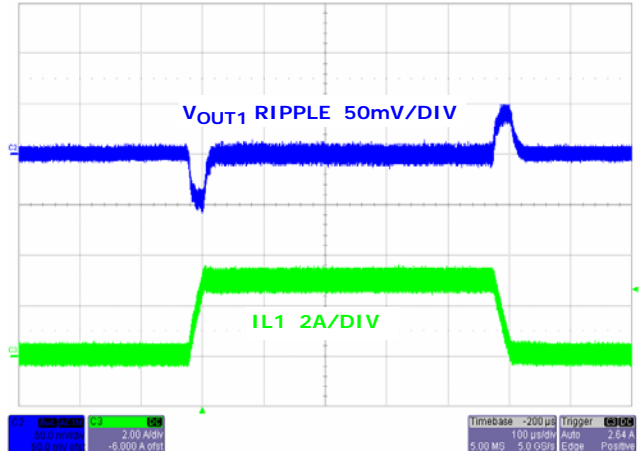


FIGURE 16. LOAD TRANSIENT CHANNEL 1 (PWM)

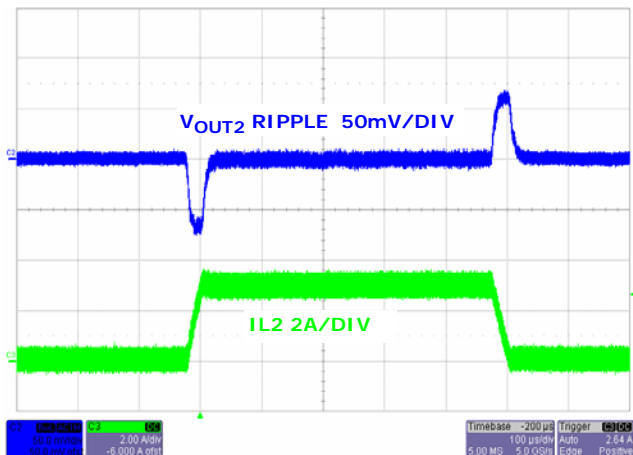


FIGURE 17. LOAD TRANSIENT CHANNEL 2 (PWM)

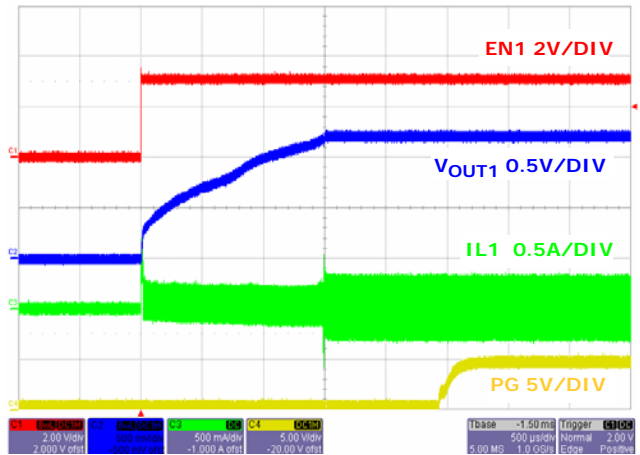


FIGURE 18. SOFT-START WITH NO LOAD CHANNEL 1

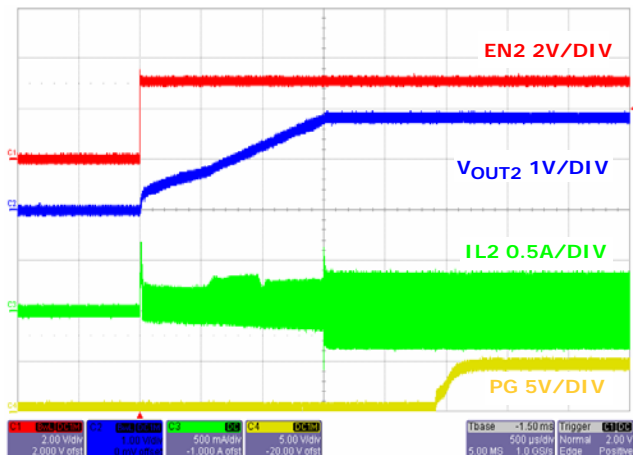


FIGURE 19. SOFT-START WITH NO LOAD CHANNEL 2

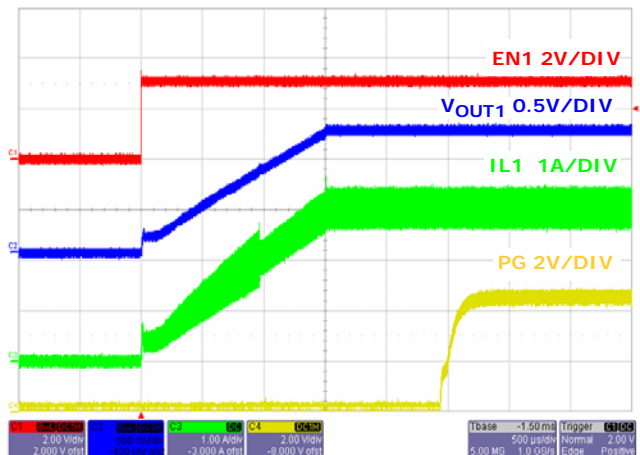


FIGURE 20. SOFT-START AT FULL LOAD CHANNEL 1

## Typical Operating Performance ISL8033

Unless otherwise noted, operating conditions are:  $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 5\text{V}$ ,  $EN = V_{IN}$ ,  $L1 = L2 = 1.5\mu\text{H}$ ,  $C1 = C2 = C4 = 2 \times 22\mu\text{F}$ ,  $V_{OUT1} = 1.2\text{V}$ ,  $V_{OUT2} = 1.8\text{V}$ ,  $I_{OUT1} = I_{OUT2} = 0\text{A to } 3\text{A}$ . (Continued)

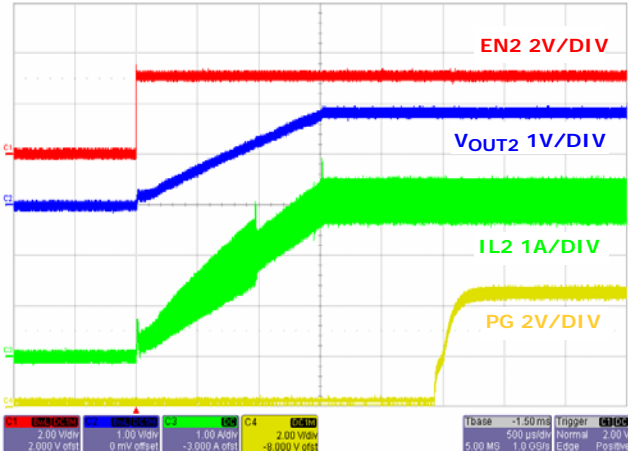


FIGURE 21. SOFT-START AT FULL LOAD CHANNEL 2

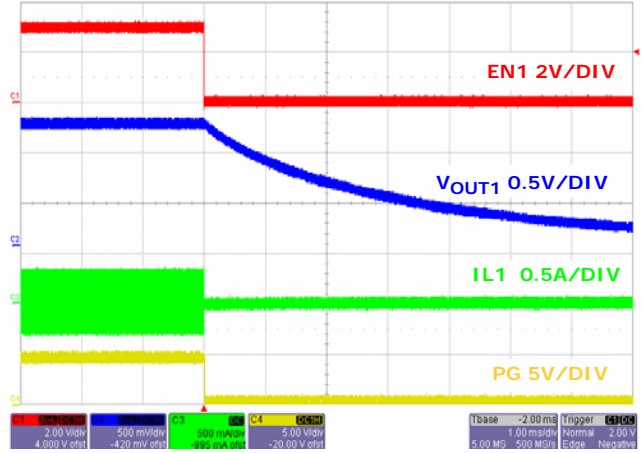


FIGURE 22. SOFT-DISCHARGE SHUTDOWN CHANNEL 1

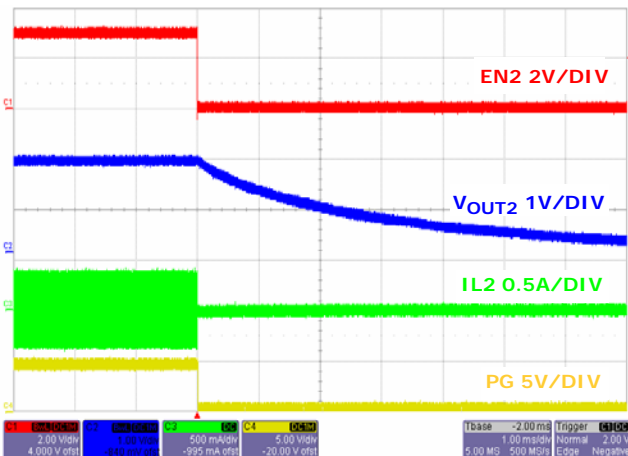


FIGURE 23. SOFT-DISCHARGE SHUTDOWN CHANNEL 2

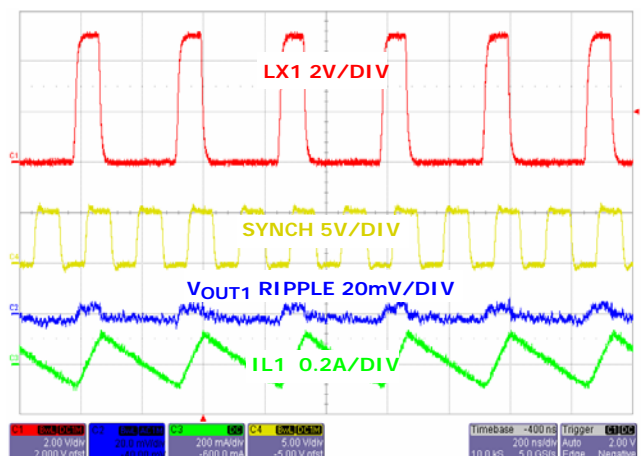


FIGURE 24. CHANNEL 1 STEADY STATE OPERATION AT NO LOAD WITH FREQUENCY = 6MHz

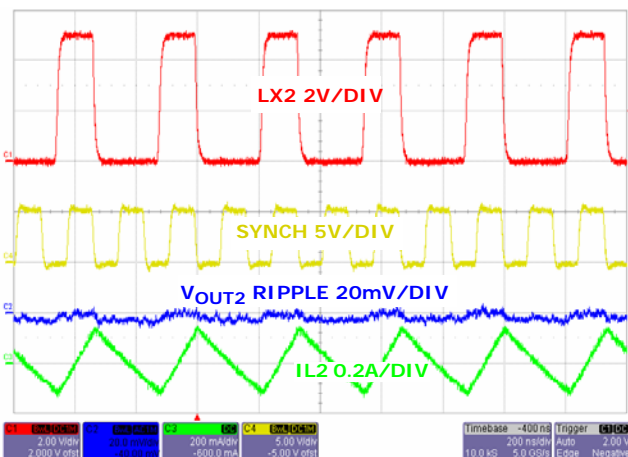


FIGURE 25. CHANNEL 2 STEADY STATE OPERATION AT NO LOAD WITH FREQUENCY = 6MHz

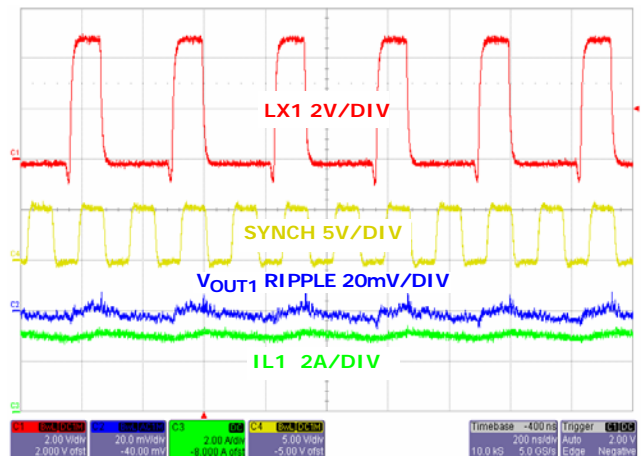


FIGURE 26. CHANNEL 1 STEADY STATE OPERATION AT FULL LOAD WITH FREQUENCY = 6MHz

## Typical Operating Performance ISL8033

Unless otherwise noted, operating conditions are:  $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 5\text{V}$ ,  $EN = V_{IN}$ ,  $L1 = L2 = 1.5\mu\text{H}$ ,  $C1 = C2 = C4 = 2 \times 22\mu\text{F}$ ,  $V_{OUT1} = 1.2\text{V}$ ,  $V_{OUT2} = 1.8\text{V}$ ,  $I_{OUT1} = I_{OUT2} = 0\text{A to } 3\text{A}$ . (Continued)

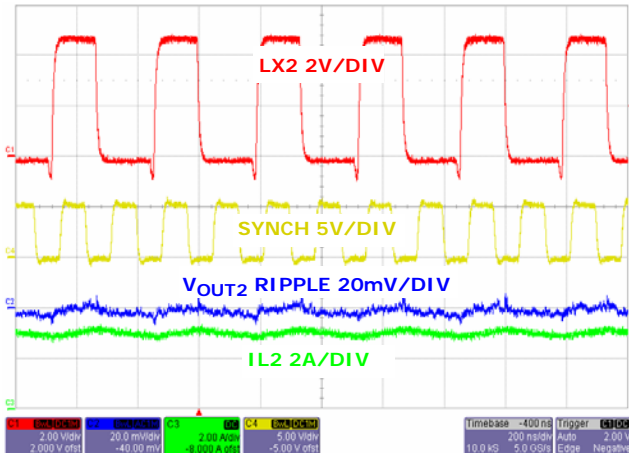


FIGURE 27. CHANNEL 2 STEADY STATE OPERATION AT FULL LOAD WITH FREQUENCY = 6MHz

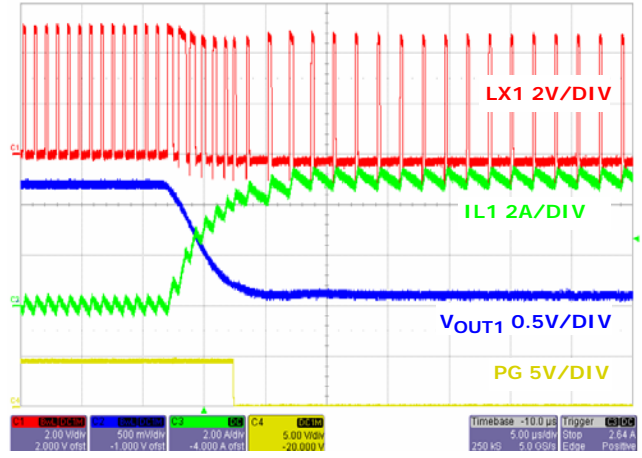


FIGURE 28. OUTPUT SHORT CIRCUIT CHANNEL 1

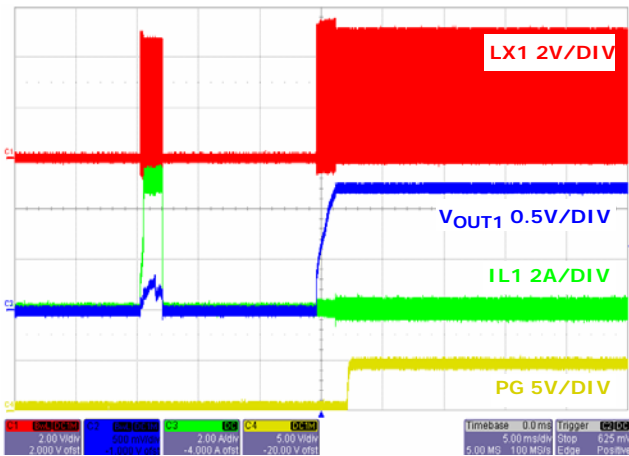


FIGURE 29. OUTPUT SHORT CIRCUIT RECOVERY CHANNEL 1

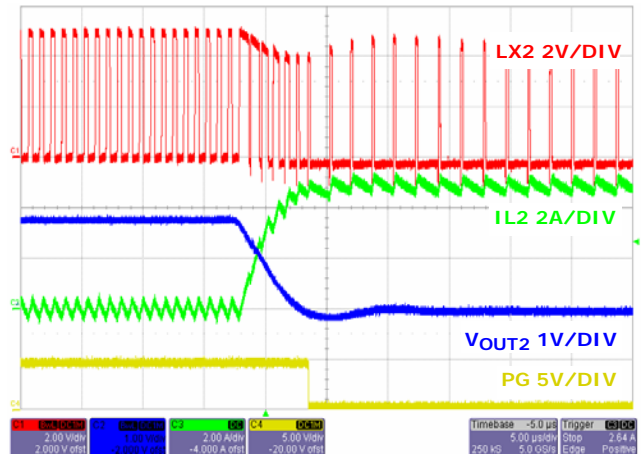


FIGURE 30. OUTPUT SHORT CIRCUIT CHANNEL 2

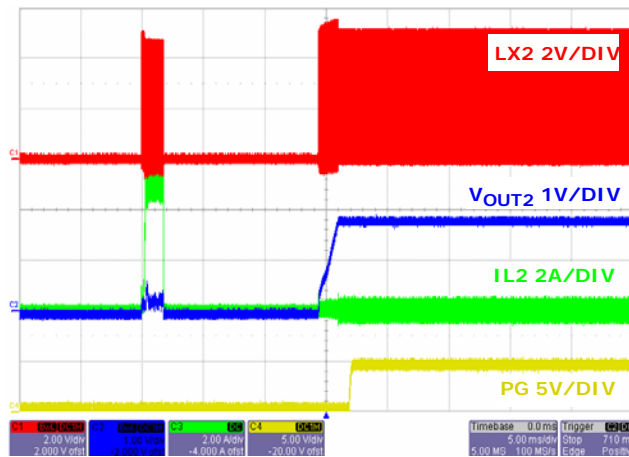


FIGURE 31. OUTPUT SHORT CIRCUIT RECOVERY CHANNEL 2

## Typical Operating Performance ISL8033A

Unless otherwise noted, operating conditions are:  $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 5\text{V}$ ,  $EN = V_{IN}$ ,  $L1 = 0.68\mu\text{H}$ ,  $L2 = 1\mu\text{H}$ ,  $C1 = C2 = C4 = 2 \times 22\mu\text{F}$ ,  $V_{OUT1} = 1.2\text{V}$ ,  $V_{OUT2} = 1.8\text{V}$ ,  $I_{OUT1} = I_{OUT2} = 0\text{A to } 3\text{A}$ .

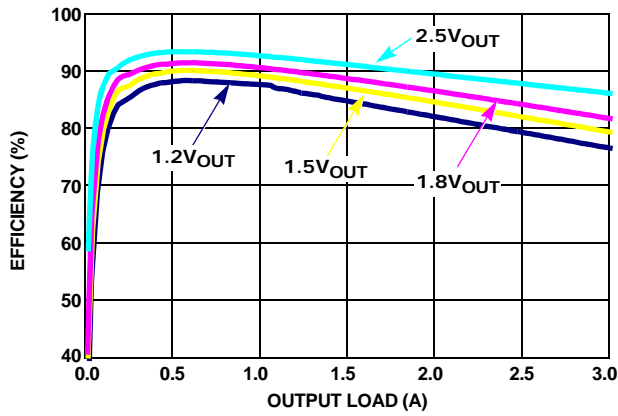


FIGURE 32. EFFICIENCY vs LOAD, 1MHz 3.3V<sub>IN</sub> DUAL CH1 +25°C

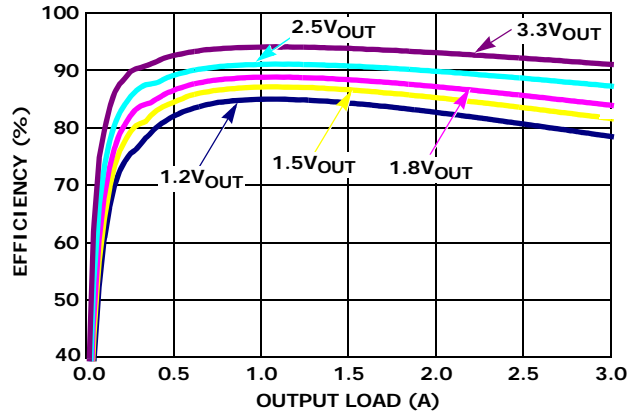


FIGURE 33. EFFICIENCY vs LOAD, 1MHz 5V<sub>IN</sub>, DUAL CH1 +25°C

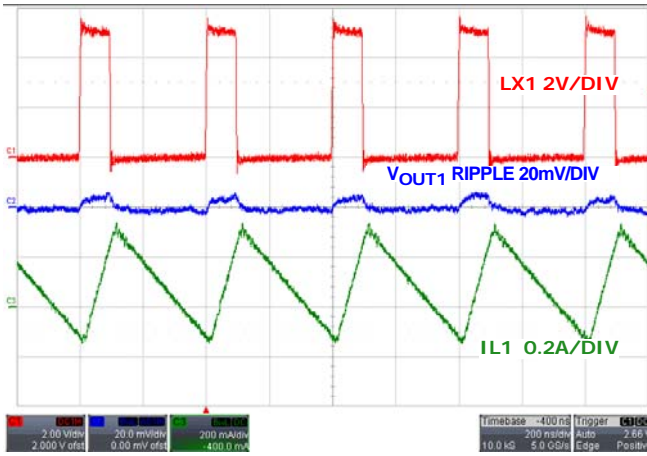


FIGURE 34. STEADY STATE OPERATION AT NO LOAD CHANNEL 1

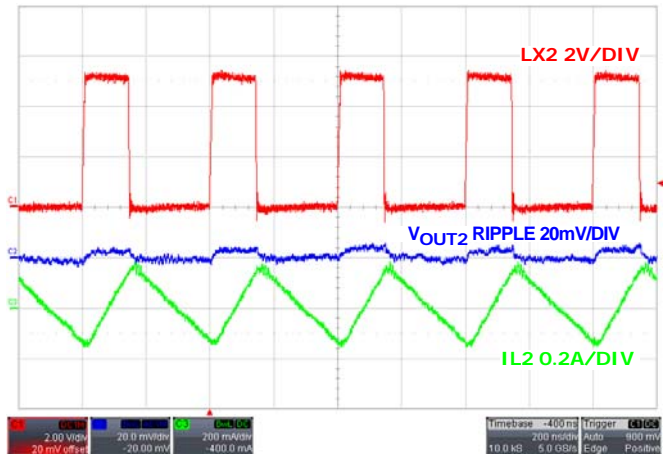


FIGURE 35. STEADY STATE OPERATION AT NO LOAD CHANNEL 2

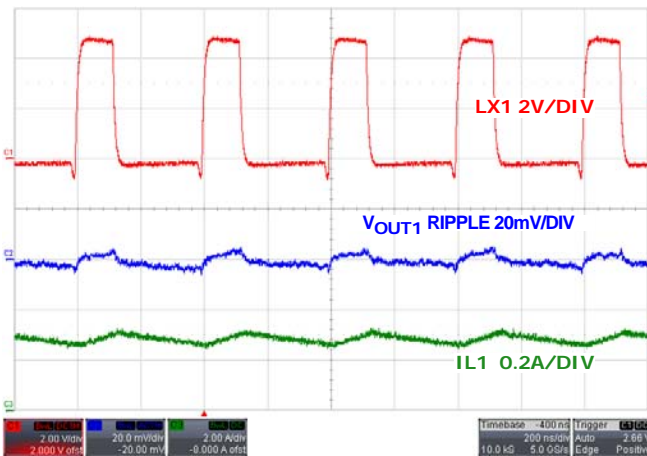


FIGURE 36. STEADY STATE OPERATION WITH FULL LOAD CHANNEL 1

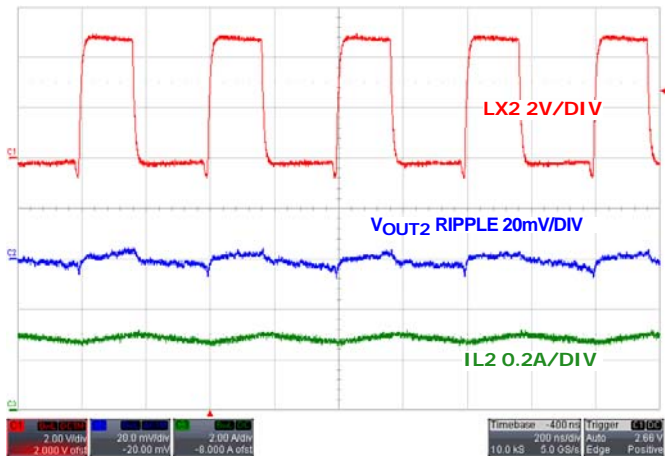


FIGURE 37. STEADY STATE OPERATION WITH FULL LOAD CHANNEL 2

## Typical Operating Performance ISL8033A

Unless otherwise noted, operating conditions are:  $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 5\text{V}$ ,  $\text{EN} = V_{IN}$ ,  $L1 = 0.68\mu\text{H}$ ,  $L2 = 1\mu\text{H}$ ,  $C1 = C2 = C4 = 2 \times 22\mu\text{F}$ ,  $V_{OUT1} = 1.2\text{V}$ ,  $V_{OUT2} = 1.8\text{V}$ ,  $I_{OUT1} = I_{OUT2} = 0\text{A to } 3\text{A}$ . (Continued)

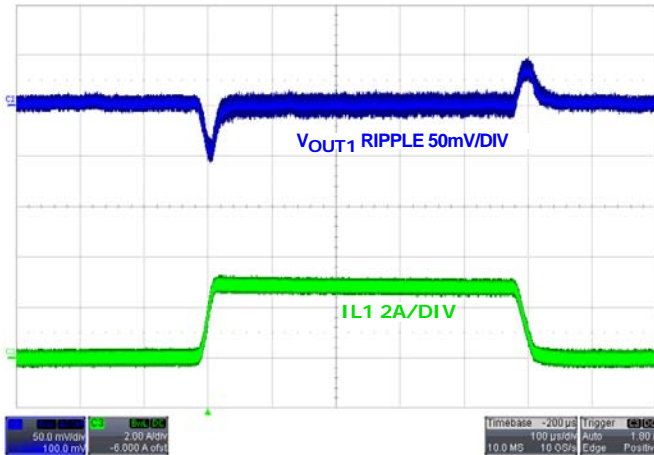


FIGURE 38. LOAD TRANSIENT CHANNEL 1

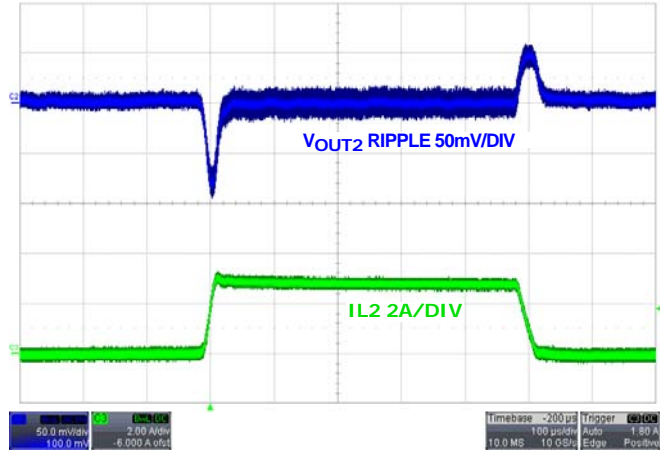


FIGURE 39. LOAD TRANSIENT CHANNEL 2

## Theory of Operation

The ISL8033 is a dual 3A step-down switching regulator optimized for battery-powered or mobile applications. The regulator operates at 1MHz fixed switching frequency under heavy load condition. The ISL8033A operates at 2.5MHz to allow small external inductor and capacitors to be used for minimal printed-circuit board (PCB) area. The two channels are 180° out-of-phase operation. The supply current is typically only 8µA when the regulator is shutdown.

## PWM Control Scheme

Pulling the SYNC pin HI (>1.5V) forces the converter into PWM mode in the next switching cycle regardless of output current. Each of the channels of the ISL8033, ISL8033A employ the current-mode pulse-width modulation (PWM) control scheme for fast transient response and pulse-by-pulse current limiting, as shown in the “Theory of Operation” on page 14. The current loop consists of the oscillator, the PWM comparator COMP, current sensing circuit, and the slope compensation for the current loop stability. The current sensing circuit consists of the resistance of the P-channel MOSFET when it is turned on and the current sense amplifier CSA1. The gain for the current sensing circuit is typically 0.20V/A. The control reference for the current loops comes from the error amplifier EAMP of the voltage loop.

The PWM operation is initialized by the clock from the oscillator. The P-channel MOSFET is turned on at the beginning of a PWM cycle and the current in the MOSFET starts to ramp-up. When the sum of the current amplifier CSA1 (or CSA2 on Channel 2) and the compensation slope (0.46V/µs) reaches the control reference of the current loop, the PWM comparator COMP sends a signal to the PWM logic to turn off the P-MOSFET and to turn on the N-channel MOSFET. The N-MOSFET stays on until the end of the PWM cycle. Figure 40 shows the typical operating waveforms during the PWM operation. The dotted lines illustrate the sum of the compensation ramp and the current-sense amplifier CSA\_ output.

The output voltage is regulated by controlling the reference voltage to the current loop. The bandgap circuit outputs a 0.8V reference voltage to the voltage control loop. The feedback signal comes from the VFB pin. The soft-start block only affects the operation during the start-up and will be discussed separately. The error amplifier is a transconductance amplifier that converts the voltage error signal to a current output. The voltage loop is internally compensated with the 27pF and 390kΩ RC network. The maximum EAMP voltage output is precisely clamped to the bandgap voltage (1.172V).

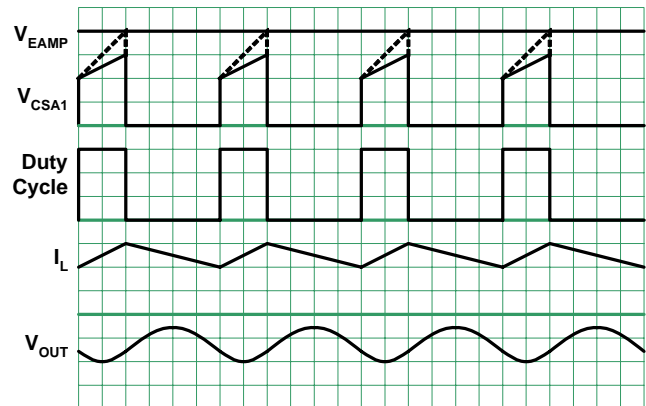


FIGURE 40. PWM OPERATION WAVEFORMS

## Synchronization Control (ISL8033)

The frequency of operation can be synchronized up to 6MHz by an external signal applied to the SYNC pin. The 1st falling edge on the SYNC triggered the rising edge of the PWM ON pulse of Channel 1. The 2nd falling edge of the SYNC triggers the rising edge of the PWM ON pulse of the Channel 2. This process alternates indefinitely allowing 180° output phase operation between the two channels.

## Overcurrent Protection

CAS1 and CSA2 are used to monitor Output 1 and Output 2 channels respectively. The overcurrent protection is realized by monitoring the CSA output with the OCP threshold logic, as shown in Figure 40. The current sensing circuit has a gain of 0.20V/A, from the P-MOSFET current to the CSA output. When the CSA1 output reaches the threshold set by ISET, the OCP comparator is tripped to turn off the P-MOSFET immediately. The overcurrent function protects the switching converter from a shorted output by monitoring the current flowing through the upper MOSFETs.

Upon detection of overcurrent condition, the upper MOSFET will be immediately turned off and will not be turned on again until the next switching cycle. Upon detection of the initial overcurrent condition, the Overcurrent Fault Counter is set to 1 and the Overcurrent Condition Flag is set from LOW to HIGH. If, on the subsequent cycle, another overcurrent condition is detected, the OC Fault Counter will be incremented. If there are 17 sequential OC fault detections, the regulator will be shutdown under an Overcurrent Fault Condition. An Overcurrent Fault Condition will result in the regulator attempting to restart in a hiccup mode with the delay between restarts being 4 soft-start periods. At the end of the fourth soft-start wait period, the fault counters are reset and soft-start is attempted again. If the overcurrent condition goes away prior to the OC Fault Counter reaching a count of four, the Overcurrent Condition Flag will set back to LOW.

If the negative output current reaches -2.5A, the part enters Negative Overcurrent Protection. At this point, all switching stops and the part enters tri-state mode while the pull-down FET is discharging the output until it reaches normal regulation voltage, then the IC restarts.

## PG

There are two independent power-good signals. PG1 monitors the Output Channel 1 and PG2 monitors the Output Channel 2. When powering up, the open-collector Power-On Reset output holds low for about 1ms after  $V_O$  reaches the preset voltage. The PG\_ output also serves as a 1ms delayed Power-Good signal.

## UVLO

When the input voltage is below the undervoltage lock out (UVLO) threshold, the regulator is disabled.

## Enable

The enable (EN) input allows the user to control the turning on or off the regulator for purposes such as power-up sequencing. When the regulator is enabled, there is typically a 600 $\mu$ s delay for waking up the bandgap reference and then the soft-start-up will begin.

## Soft Start-Up

The soft start-up eliminates the inrush current during the start-up. The soft-start block outputs a ramp reference to both the voltage loop and the current loop. The two ramps limit the inductor current rising 1/2 speed as well as the output voltage speed so that the output voltage rises in a controlled fashion. At the very beginning of the start-up, the output voltage is less than

0.5V; hence the PWM operating frequency is 1/2 of the normal frequency.

When the IC ramps up at start-up, it can't sink current even at PWM mode.

## Discharge Mode (Soft-Stop)

When a transition to shutdown mode occurs, or the output undervoltage fault latch is set, its output discharges to PGND through an internal 100 $\Omega$  switch.

## Power MOSFETs

The power MOSFETs are optimized for best efficiency. The ON-resistance for the P-MOSFET is typically 50m $\Omega$  and the ON-resistance for the N-MOSFET is typical 50m $\Omega$ .

## 100% Duty Cycle

The ISL8033 features 100% duty cycle operation to maximize the battery life. When the battery voltage drops to a level that the ISL8033, ISL8033A can no longer maintain the regulation at the output, the regulator completely turns on the P-MOSFET. The maximum drop-out voltage under the 100% duty-cycle operation is the product of the load current and the ON-resistance of the P-MOSFET.

## Thermal Shutdown

The ISL8033, ISL8033A has built-in thermal protection. When the internal temperature reaches +150 $^{\circ}$ C, the regulator is completely shutdown. As the temperature drops to +125 $^{\circ}$ C, the ISL8033, ISL8033A resumes operation by stepping through a soft start-up.

## Applications Information

### Output Inductor and Capacitor Selection

To consider steady state and transient operation, ISL8033 typically uses a 1.5 $\mu$ H output inductor. Higher or lower inductor value can be used to optimize the total converter system performance. For example, for a higher output voltage 3.3V application, in order to decrease the inductor current ripple and output voltage ripple, the output inductor value can be increased. The inductor ripple current can be expressed in Equation 1:

$$\Delta I = \frac{V_O \cdot \left(1 - \frac{V_O}{V_{IN}}\right)}{L \cdot f_S} \quad (\text{EQ. 1})$$

The inductor's saturation current rating needs be at least larger than the peak current. The ISL8033, ISL8033A protects the typical peak current 4.8A. The saturation current needs be over 4.8A for maximum output current application.

ISL8033, ISL8033A uses an internal compensation network and the output capacitor value is dependent on the output voltage. The ceramic capacitor is recommended to be X5R or X7R. The recommended minimum output capacitor values for the ISL8033, ISL8033A are shown in Tables 1 and 2 on page 2.

### Output Voltage Selection

The output voltage of the regulator can be programmed via an external resistor divider, which is used to scale the output voltage

relative to the internal reference voltage and feed it back to the inverting input of the error amplifier. Refer to Figure 2.

The output voltage programming resistor,  $R_2$  (or  $R_5$  in Channel 2), will depend on the desired output voltage of the regulator. The value for the feedback resistor is typically between  $0\Omega$  and  $750k\Omega$ . Let  $R_2 = 124k\Omega$ , then  $R_3$  will be:

$$R_3 = \frac{R_2 \times 0.8V}{V_{OUT} - 0.8V} \quad (\text{EQ. 2})$$

For better performance, add  $12pF$  in parallel to  $R_2$ . If the output voltage desired is  $0.8V$ , then leave  $R_3$  unpopulated and short  $R_2$ .

## Input Capacitor Selection

The main functions for the input capacitor is to provide decoupling of the parasitic inductance and to provide filtering function to prevent the switching current flowing back to the battery rail. One  $22\mu F$  X5R or X7R ceramic capacitor is a good starting point for the input capacitor selection per channel.

## PCB Layout Recommendation

The PCB layout is a very important converter design step to make sure the designed converter works well. For ISL8033, the power loop is composed of the output inductor L's, the output capacitor  $C_{OUT1}$  and  $C_{OUT2}$ , the LX's pins, and the SGND pin. It is necessary to make the power loop as small as possible and the connecting traces among them should be direct, short and wide. The switching node of the converter, the LX\_ pins, and the traces connected to the node are very noisy, so keep the voltage feedback trace away from these noisy traces. The input capacitor should be placed as closely as possible to the VIN pin. Also, the ground of the input and output capacitors should be connected as closely as possible. The heat of the IC is mainly dissipated through the thermal pad. Maximizing the copper area connected to the thermal pad is preferable. In addition, a solid ground plane is helpful for better EMI performance. It is recommended to add at least 5 vias ground connection within the pad for the best thermal relief.

---

For additional products, see [www.intersil.com/product\\_tree](http://www.intersil.com/product_tree)

---

Intersil products are manufactured, assembled and tested utilizing ISO9000 quality systems as noted in the quality certifications found at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

---

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

---

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)



# ISL8033, ISL8033A

## Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to web to make sure you have the latest revision.

| DATE      | REVISION | CHANGE  |
|-----------|----------|---|
| 1/12/2011 | FN6854.2 | Throughout:<br>Converted to new datasheet template<br><br>P1:<br>Added "Related Literature"<br><br>P5:<br>Updated Tape & Reel note in "Ordering Information" from "Add "-T" suffix for tape and reel." to new standard "Add "-T*" suffix for tape and reel." The "*" covers all possible tape and reel options<br><br>P6:<br>Updated over temp note in Min Max column of spec tables from "Parameters with MIN and/or MAX limits are 100% tested at +25 °C, unless otherwise specified. Temperature limits established by characterization and are not production tested." to new standard "Compliance to datasheet limits is assured by one or more methods: production test, characterization and/or design." |
| 10/12/10  | FN6854.1 | In Table 3 on page 2, corrected $F_{SW}$ for ISL8033 from 1Hz to 1MHz   |
| 9/29/10   | FN6854.0 | Initial Release.  |

## Products

Intersil Corporation is a leader in the design and manufacture of high-performance analog semiconductors. The Company's products address some of the industry's fastest growing markets, such as, flat panel displays, cell phones, handheld products, and notebooks. Intersil's product families address power management and analog signal processing functions. Go to [www.intersil.com/products](http://www.intersil.com/products) for a complete list of Intersil product families.

\*For a complete listing of Applications, Related Documentation and Related Parts, please see the respective device information page on intersil.com: [ISL8033](http://www.intersil.com/ISL8033), [ISL8033A](http://www.intersil.com/ISL8033A)

To report errors or suggestions for this datasheet, please go to [www.intersil.com/askourstaff](http://www.intersil.com/askourstaff)

FITs are available from our website at <http://rel.intersil.com/reports/search.php>

For additional products, see [www.intersil.com/product\\_tree](http://www.intersil.com/product_tree)

Intersil products are manufactured, assembled and tested utilizing ISO9000 quality systems as noted in the quality certifications found at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)





# ISL8033, ISL8033A

## Package Outline Drawing

### L24.4x4D

24 LEAD QUAD FLAT NO-LEAD PLASTIC PACKAGE

Rev 2, 10/06

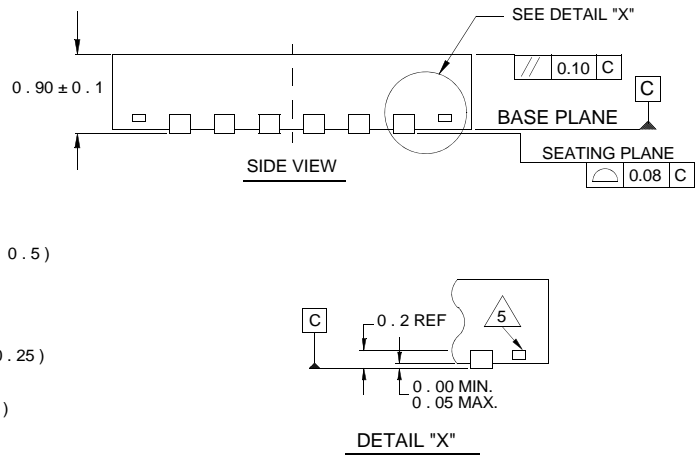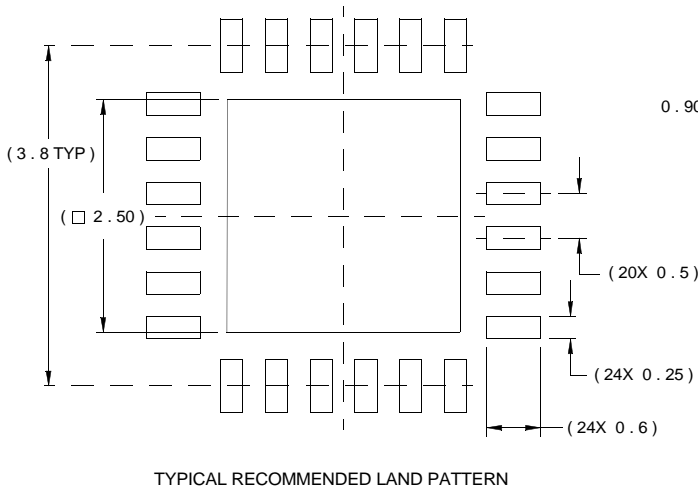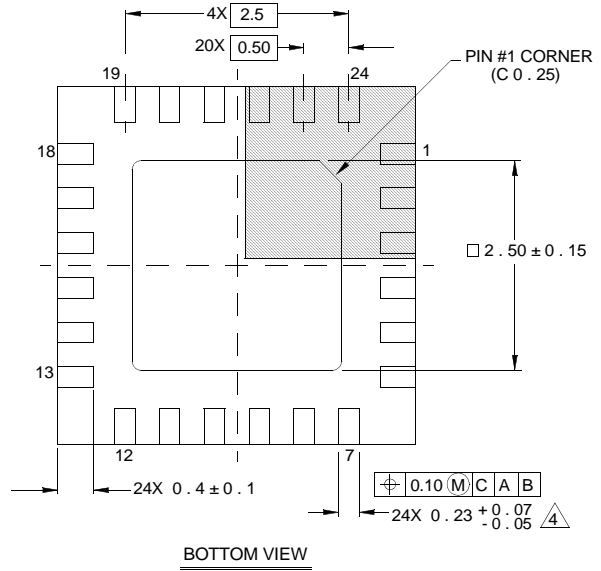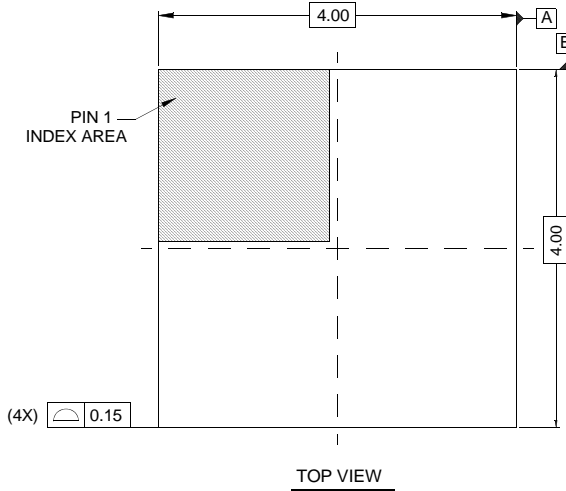

#### NOTES:

1. Dimensions are in millimeters.  
Dimensions in ( ) for Reference Only.
2. Dimensioning and tolerancing conform to AMSE Y14.5m-1994.
3. Unless otherwise specified, tolerance : Decimal  $\pm 0.05$
4. Dimension b applies to the metallized terminal and is measured between 0.15mm and 0.30mm from the terminal tip.
5. Tiebar shown (if present) is a non-functional feature.
6. The configuration of the pin #1 identifier is optional, but must be located within the zone indicated. The pin #1 identifier may be either a mold or mark feature.