

## UltraLow Supply-Current/Supply-Voltage Supervisory Circuits

### FEATURES

- Precision Supply Voltage Supervision Range: 0.9 V, 1.2 V, 1.5 V, 1.6 V, 2 V, and 3.3 V
- High Trip-Point Accuracy: 0.75%
- Supply Current of 1.2  $\mu$ A (typical)
- $\overline{\text{RESET}}$  Defined With Input Voltages as Low as 0.4 V
- Power-On Reset Generator With a Delay Time of 130 ms
- Push/Pull or Open-Drain  $\overline{\text{RESET}}$  Outputs
- SOT23-6 Package
- Package Temperature Range:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

### APPLICATIONS

- Applications Using Low-Power DSPs, Microcontrollers, or Microprocessors
- Portable- and Battery-Powered Equipment
- Intelligent Instruments
- Wireless Communication Systems
- Industrial Equipment
- Notebook/Desktop Computers

### DESCRIPTION



The TPS310x and TPS311x families of supervisory circuits provide circuit initialization and timing supervision, primarily for DSP and processor-based systems.

During power-on,  $\overline{\text{RESET}}$  is asserted when the supply voltage ( $V_{\text{DD}}$ ) becomes higher than 0.4 V. Thereafter, the supervisory circuit monitors  $V_{\text{DD}}$  and keeps the  $\overline{\text{RESET}}$  output active as long as  $V_{\text{DD}}$  remains below the threshold voltage ( $V_{\text{IT}}$ ). An internal timer delays the return of the output to the inactive state to ensure proper system reset. The delay time starts after  $V_{\text{DD}}$  has risen above  $V_{\text{IT}}$ . When  $V_{\text{DD}}$  drops below  $V_{\text{IT}}$ , the output becomes active again.

All the devices of this family have a fixed-sense threshold voltage ( $V_{\text{IT}}$ ) set by an internal voltage divider.

The TPS3103 and TPS3106 have an active-low, open-drain  $\overline{\text{RESET}}$  output. The TPS3110 has an active-low push/pull  $\overline{\text{RESET}}$ .

The product spectrum is designed for supply voltages of 0.9 V up to 3.3 V. The circuits are available in SOT23-6 packages. The TPS31xx family is characterized for operation over a temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

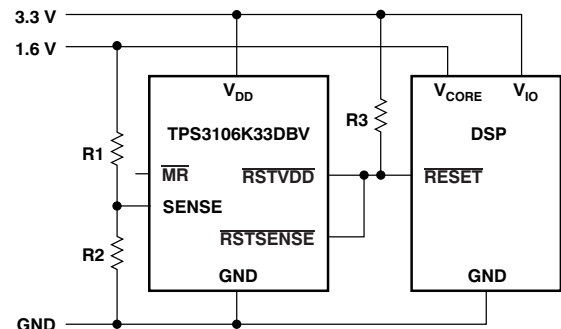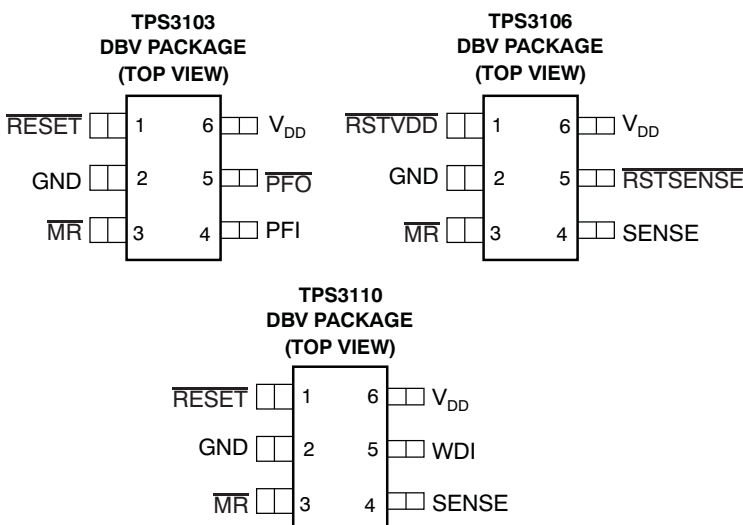

**Typical Application Circuit**



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### ORDERING INFORMATION<sup>(1)</sup>

| PRODUCT        | NOMINAL SUPPLY VOLTAGE | THRESHOLD VOLTAGE, $V_{IT}$ <sup>(2)</sup> |
|----------------|------------------------|--|
| TPS3103E12DBVR | 1.2 V                  | 1.142 V                                    |
| TPS3103E15DBVR | 1.5 V                  | 1.434 V                                    |
| TPS3103H20DBVR | 2.0 V                  | 1.84 V                                     |
| TPS3103K33DBVR | 3.3 V                  | 2.941 V                                    |
| TPS3106E09DBVR | 0.9 V                  | 0.86 V                                     |
| TPS3106E16DBVR | 1.6 V                  | 1.521 V                                    |
| TPS3106K33DBVR | 3.3 V                  | 2.941 V                                    |
| TPS3110E09DBVR | 0.9 V                  | 0.86 V                                     |
| TPS3110E12DBVR | 1.2 V                  | 1.142 V                                    |
| TPS3110E15DBVR | 1.5 V                  | 1.434 V                                    |
| TPS3110K33DBVR | 3.3 V                  | 2.941 V                                    |

- (1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).
- (2) Custom threshold voltages are available. Minimum order quantities apply. Contact factory for details and availability.

### AVAILABLE OPTIONS

| DEVICE  | RESET OUTPUT | RSTSENSE, $\overline{\text{RSTVDD}}$ OUTPUT | SENSE INPUT | WDI INPUT | $\overline{\text{PFO}}$ OUTPUT |
|---------|--------------|---|-------------|-----------|--------------------------------|
| TPS3103 | Open-drain   |   |             |           | Open-drain                     |
| TPS3106 |              | Open-drain                                  | ✓           |           |                                |
| TPS3110 | Push-pull    |   | ✓           | ✓         |                                |

### ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

Over operating free-air temperature range, unless otherwise noted.

|   | VALUE  | UNIT |
|---|--|------|
| Supply voltage, $V_{DD}$ <sup>(2)</sup>                                       | –0.3 to +3.6                                 | V    |
| $\overline{\text{MR}}$ Pin, $V_{MR}$  | –0.3 to $V_{DD} + 0.3$                       | V    |
| All other pins <sup>(2)</sup>   | –0.3 to +3.6                                 | V    |
| Maximum low output current, $I_{OL}$  | 5  | mA   |
| Maximum high output current, $I_{OH}$   | –5   | mA   |
| Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{DD}$ )                 | ±10  | mA   |
| Output clamp current, $I_{OK}$ ( $V_O < 0$ or $V_O > V_{DD}$ ) <sup>(3)</sup> | ±10  | mA   |
| Continuous total power dissipation  | See <a href="#">Dissipation Rating Table</a> |      |
| Operating temperature range, $T_A$  | –40 to +85                                   | °C   |
| Storage temperature range, $T_{STG}$  | –65 to +150                                  | °C   |
| Soldering temperature   | +260   | °C   |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to GND. For reliable operation, the device must not be operated at 3.6 V for more than  $t = 1000\text{h}$  continuously.
- (3) Output is clamped for push-pull outputs by the back gate diodes internal to the IC. No clamp exists for the open-drain outputs.

## DISSIPATION RATINGS

| PACKAGE | T <sub>A</sub> ≤ +25°C<br>POWER RATING | DERATING FACTOR<br>ABOVE T <sub>A</sub> = +25°C | T <sub>A</sub> = +70°C<br>POWER RATING | T <sub>A</sub> = +85°C<br>POWER RATING |
|---------|--|---|--|--|
| DBV     | 437 mW                                 | 3.5 mW/°C                                       | 280 mW                                 | 227 mW                                 |

## RECOMMENDED OPERATING CONDITIONS

Over operating free-air temperature range, unless otherwise noted.

|   | MIN                   | MAX                   | UNIT |
|---|-----------------------|-----------------------|------|
| Supply voltage, V <sub>DD</sub> <sup>(1)</sup>                                      | 0.4                   | 3.3                   | V    |
| Input voltage, V <sub>I</sub>   | 0                     | V <sub>DD</sub> + 0.3 | V    |
| High-level input voltage, V <sub>IH</sub> at $\overline{MR}$ , WDI                  | 0.7 × V <sub>DD</sub> |                       | V    |
| Low-level input voltage, V <sub>IL</sub> at $\overline{MR}$ , WDI                   |                       | 0.3 × V <sub>DD</sub> | V    |
| Input transition rise and fall rate at $\Delta t/\Delta V$ at $\overline{MR}$ , WDI |                       | 100                   | ns/V |
| Operating temperature range, T <sub>A</sub>   | -40                   | +85                   | °C   |

(1) For proper operation of SENSE, PFI, and WDI functions: V<sub>DD</sub> ≥ 0.8 V.

## ELECTRICAL CHARACTERISTICS

Over operating free-air temperature range (unless otherwise noted).

| PARAMETER           |  | TEST CONDITIONS                                    | MIN   | TYP    | MAX    | UNIT  |                       |
|---------------------|--|--|---|--------|--------|-------|-----------------------|
| V <sub>OH</sub>     | High-level output voltage                                | V <sub>DD</sub> = 3.3 V, I <sub>OH</sub> = -3 mA   | 0.8 × V <sub>DD</sub>                                       |        |        | V     |                       |
|                     |  | V <sub>DD</sub> = 1.8 V, I <sub>OH</sub> = -2 mA   |   |        |        |       |                       |
|                     |  | V <sub>DD</sub> = 1.5 V, I <sub>OH</sub> = -1 mA   |   |        |        |       |                       |
|                     |  | V <sub>DD</sub> = 0.9 V, I <sub>OH</sub> = -0.4 mA |   |        |        |       |                       |
|                     |  | V <sub>DD</sub> = 0.5 V, I <sub>OH</sub> = -5 μA   |   |        |        |       | 0.7 × V <sub>DD</sub> |
| V <sub>OL</sub>     | Low-level output voltage                                 | V <sub>DD</sub> = 3.3 V, I <sub>OL</sub> = 3 mA    |   |        | 0.3    | V     |                       |
|                     |  | V <sub>DD</sub> = 1.5 V, I <sub>OL</sub> = 2 mA    |   |        |        |       |                       |
|                     |  | V <sub>DD</sub> = 1.2 V, I <sub>OL</sub> = 1 mA    |   |        |        |       |                       |
|                     |  | V <sub>DD</sub> = 0.9 V, I <sub>OL</sub> = 500 μA  |   |        |        |       |                       |
| V <sub>OL</sub>     | Low-level output voltage                                 | RESET only   | V <sub>DD</sub> = 0.4 V, I <sub>OL</sub> = 5 μA             |        |        | 0.1   | V                     |
| V <sub>IT-</sub>    | Negative-going input threshold voltage <sup>(1)</sup>    | TPS31xxE09   | T <sub>A</sub> = +25°C                                      | 0.854  | 0.860  | 0.866 | V                     |
|                     |  | TPS31xxE12   |   | 1.133  | 1.142  | 1.151 |                       |
|                     |  | TPS31xxE15   |   | 1.423  | 1.434  | 1.445 |                       |
|                     |  | TPS31xxE16   |   | 1.512  | 1.523  | 1.534 |                       |
|                     |  | TPS31xxH20   |   | 1.829  | 1.843  | 1.857 |                       |
|                     |  | TPS31xxK33   |   | 2.919  | 2.941  | 2.963 |                       |
| V <sub>IT-(S)</sub> | Negative-going input threshold voltage <sup>(1)</sup>    | SENSE, PFI   | V <sub>DD</sub> ≥ 0.8 V, T <sub>A</sub> = +25°C             | 0.542  | 0.551  | 0.559 | V                     |
| V <sub>HYS</sub>    | Hysteresis at V <sub>DD</sub> input                      | 0.8 V ≤ V <sub>IT</sub> < 1.5 V                    |   | 20     |        | mV    |                       |
|                     |  | 1.6 V ≤ V <sub>IT</sub> < 2.4 V                    |   | 30     |        |       |                       |
|                     |  | 2.5 V ≤ V <sub>IT</sub> < 3.3 V                    |   | 50     |        |       |                       |
| T <sub>(K)</sub>    | Temperature coefficient of V <sub>IT-</sub> , PFI, SENSE | T <sub>A</sub> = -40°C to +85°C                    |   | -0.012 | -0.019 | %/K   |                       |
| V <sub>HYS</sub>    | Hysteresis at SENSE, PFI input                           | V <sub>DD</sub> ≥ 0.8 V                            |   | 15     |        | mV    |                       |
| I <sub>IH</sub>     | High-level input current                                 | $\overline{MR}$                                    | $\overline{MR} = V_{DD}$ , V <sub>DD</sub> = 3.3 V          | -25    |        | 25    | nA                    |
|                     |  | SENSE, PFI, WDI                                    | SENSE, PFI, WDI = V <sub>DD</sub> , V <sub>DD</sub> = 3.3 V | -25    |        | 25    |                       |

(1) To ensure the best stability of the threshold voltage, a bypass capacitor (ceramic, 0.1 μF) should be placed close to the supply terminals.

## ELECTRICAL CHARACTERISTICS (continued)

Over operating free-air temperature range (unless otherwise noted).

| PARAMETER       |   | TEST CONDITIONS                         | MIN  | TYP | MAX | UNIT |    |
|-----------------|---|---|--|-----|-----|------|----|
| I <sub>IL</sub> | Low-level input current                           | MR                                      | MR = 0 V, V <sub>DD</sub> = 3.3 V  | -47 | -33 | -25  | μA |
|                 |   | SENSE, PFI, WDI                         | SENSE, PFI, WDI = 0 V, V <sub>DD</sub> = 3.3 V                               | -25 |     | 25   | nA |
| I <sub>OH</sub> | High-level output current at RESET <sup>(2)</sup> | Open-drain                              | V <sub>DD</sub> = V <sub>IT</sub> + 0.2 V, V <sub>OH</sub> = 3.3 V           |     |     | 200  | nA |
| I <sub>DD</sub> | Supply current                                    |   | V <sub>DD</sub> > V <sub>IT</sub> (average current), V <sub>DD</sub> < 1.8 V |     | 1.2 | 3    | μA |
|                 |   |   | V <sub>DD</sub> > V <sub>IT</sub> (average current), V <sub>DD</sub> > 1.8 V |     | 2   | 4.5  |    |
|                 |   |   | V <sub>DD</sub> < V <sub>IT</sub> , V <sub>DD</sub> < 1.8 V                  |     |     | 22   |    |
|                 |   |   | V <sub>DD</sub> < V <sub>IT</sub> , V <sub>DD</sub> > 1.8 V                  |     |     | 27   |    |
|                 | Internal pull-up resistor at MR                   |   | 70   | 100 | 130 | kΩ   |    |
| C <sub>I</sub>  | Input capacitance at MR, SENSE, PFI, WDI          | V <sub>I</sub> = 0 V to V <sub>DD</sub> |  | 1   |     | pF   |    |

(2) Also refers to RSTVDD and RSTSENSE.

## SWITCHING CHARACTERISTICS

At R<sub>L</sub> = 1 MΩ, C<sub>L</sub> = 50 pF, and T<sub>A</sub> = -40°C to +85°C, unless otherwise noted.

| PARAMETER        |  | TEST CONDITIONS  | MIN | TYP | MAX | UNIT |
|------------------|--|--|-----|-----|-----|------|
| t <sub>D</sub>   | Delay time                                       | V <sub>DD</sub> ≥ 1.1 × V <sub>IT</sub> , MR = 0.7 × V <sub>DD</sub> , See <a href="#">Timing Diagrams</a>   | 65  | 130 | 195 | ms   |
| t <sub>PHL</sub> | Propagation delay time, high-to-low level output | V <sub>DD</sub> to RESET or RSTVDD delay<br>V <sub>IH</sub> = 1.1 × V <sub>IT</sub> , V <sub>IL</sub> = 0.9 × V <sub>IT</sub>                                      |     |     | 40  | μs   |
| t <sub>PLH</sub> | Propagation delay time, low-to-high level output | V <sub>DD</sub> to RESET or RSTVDD delay<br>V <sub>IH</sub> = 1.1 × V <sub>IT</sub> , V <sub>IL</sub> = 0.9 × V <sub>IT</sub>                                      |     |     | 40  | μs   |
| t <sub>PHL</sub> | Propagation delay time, high-to-low level output | SENSE to RESET or RSTSENSE delay<br>V <sub>DD</sub> ≥ 0.8 V, V <sub>IH</sub> = 1.1 × V <sub>IT</sub> , V <sub>IL</sub> = 0.9 × V <sub>IT</sub>                     |     |     | 40  | μs   |
| t <sub>PLH</sub> | Propagation delay time, high-to-low level output | SENSE to RESET or RSTSENSE delay<br>V <sub>DD</sub> ≥ 0.8 V, V <sub>IH</sub> = 1.1 × V <sub>IT</sub> , V <sub>IL</sub> = 0.9 × V <sub>IT</sub>                     |     |     | 40  | μs   |
| t <sub>PHL</sub> | Propagation delay time, high-to-low level output | PFI to PFO delay<br>V <sub>DD</sub> ≥ 0.8 V, V <sub>IH</sub> = 1.1 × V <sub>IT</sub> , V <sub>IL</sub> = 0.9 × V <sub>IT</sub>                                     |     |     | 40  | μs   |
| t <sub>PLH</sub> | Propagation delay time, low-to-high level output | PFI to PFO delay<br>V <sub>DD</sub> ≥ 0.8 V, V <sub>IH</sub> = 1.1 × V <sub>IT</sub> , V <sub>IL</sub> = 0.9 × V <sub>IT</sub>                                     |     |     | 300 | μs   |
| t <sub>PHL</sub> | Propagation delay time, low-to-high level output | MR to RESET, RSTVDD, RSTSENSE delay<br>V <sub>DD</sub> ≥ 1.1 × V <sub>IT</sub> , V <sub>IL</sub> = 0.3 × V <sub>DD</sub> , V <sub>IH</sub> = 0.7 × V <sub>DD</sub> |     | 1   | 5   | μs   |
| t <sub>PLH</sub> | Propagation delay time, low-to-high level output | MR to RESET, RSTVDD, RSTSENSE delay<br>V <sub>DD</sub> ≥ 1.1 × V <sub>IT</sub> , V <sub>IL</sub> = 0.3 × V <sub>DD</sub> , V <sub>IH</sub> = 0.7 × V <sub>DD</sub> |     | 1   | 5   | μs   |


## TIMING REQUIREMENTS

At R<sub>L</sub> = 1 MΩ, C<sub>L</sub> = 50 pF, and T<sub>A</sub> = -40°C to +85°C, unless otherwise noted.


| PARAMETER           |                 | TEST CONDITIONS                    | MIN   | TYP | MAX  | UNIT |    |
|---------------------|-----------------|------------------------------------|---|-----|------|------|----|
| t <sub>T(OUT)</sub> | Time-out period | at WDI<br>V <sub>DD</sub> ≥ 0.85 V | 0.55  | 1.1 | 1.65 | s    |    |
| t <sub>W</sub>      | Pulse width     | at V <sub>DD</sub>                 | V <sub>IH</sub> = 1.1 × V <sub>IT</sub> , V <sub>IL</sub> = 0.9 × V <sub>IT</sub> , V <sub>IT-</sub> = 0.86 V                     | 20  |      |      | μs |
|                     |                 | at MR                              | V <sub>DD</sub> ≥ V <sub>IT</sub> + 0.2 V, V <sub>IL</sub> = 0.3 × V <sub>DD</sub> , V <sub>IH</sub> = 0.7 × V <sub>DD</sub>      | 0.1 |      |      |    |
|                     |                 | at SENSE                           | V <sub>DD</sub> ≥ V <sub>IT</sub> , V <sub>IH</sub> = 1.1 × V <sub>IT - (S)</sub> , V <sub>IL</sub> = 0.9 × V <sub>IT - (S)</sub> | 20  |      |      |    |
|                     |                 | at PFI                             | V <sub>DD</sub> ≥ 0.85 V, V <sub>IH</sub> = 1.1 × V <sub>IT - (S)</sub> , V <sub>IL</sub> = 0.9 × V <sub>IT - (S)</sub>           | 20  |      |      |    |
|                     |                 | at WDI                             | V <sub>DD</sub> ≥ V <sub>IT</sub> , V <sub>IL</sub> = 0.3 × V <sub>DD</sub> , V <sub>IH</sub> = 0.7 × V <sub>DD</sub>             | 0.3 |      |      |    |

## FUNCTIONAL BLOCK DIAGRAMS

TPS3103

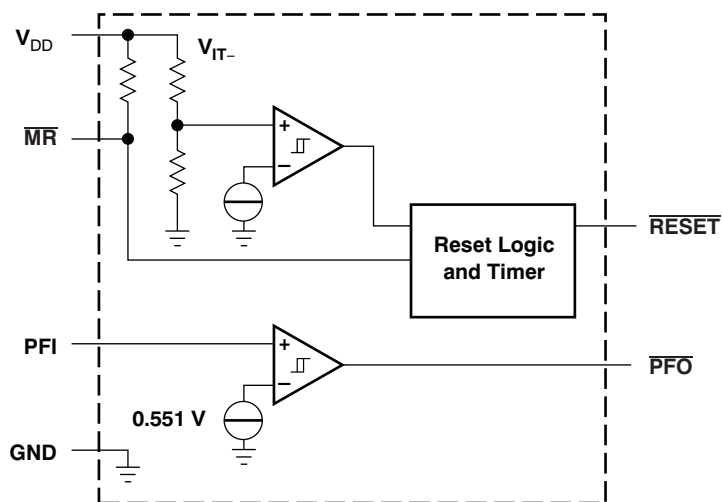

TPS3106

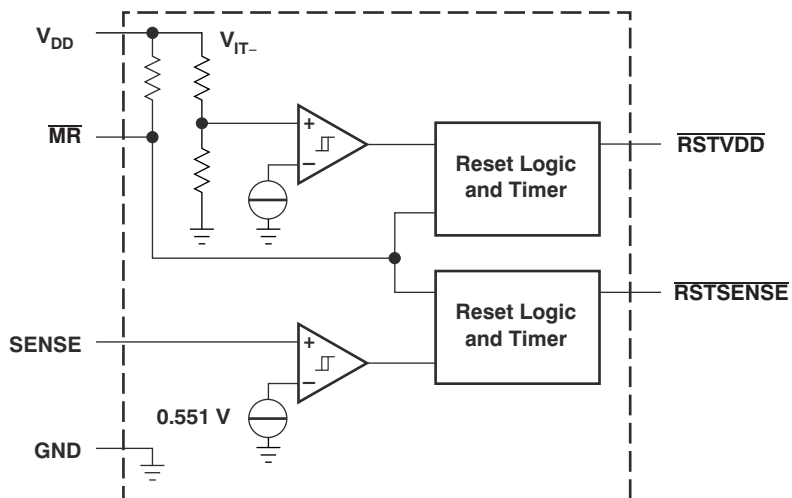

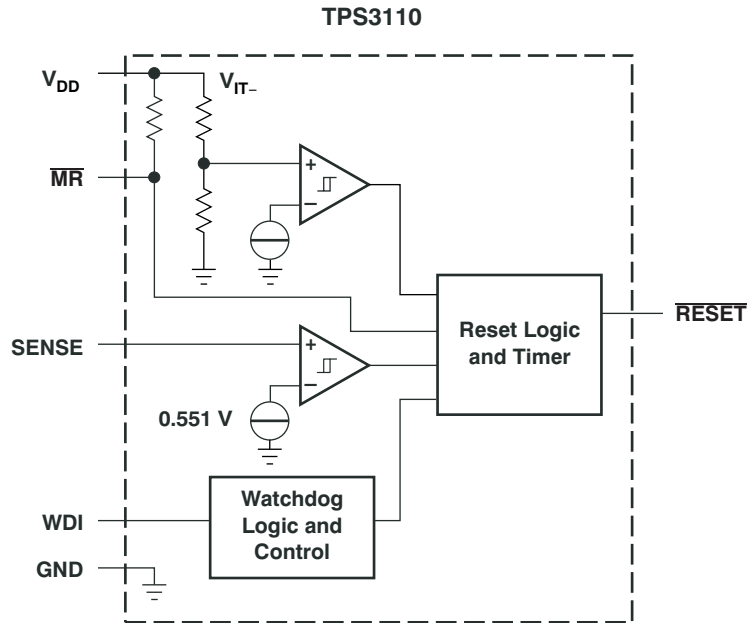


Table 1. TPS3103 FUNCTION TABLE

| MR | $V_{(PFI)} > 0.551 \text{ V}$ | $V_{DD} > V_{IT}$ | RESET | PFO |
|----|-------------------------------|-------------------|-------|-----|
| L  | 0                             | X <sup>(1)</sup>  | L     | L   |
| L  | 1                             | X                 | L     | H   |
| H  | 0                             | 0                 | L     | L   |
| H  | 0                             | 1                 | H     | L   |
| H  | 1                             | 0                 | L     | H   |
| H  | 1                             | 1                 | H     | H   |

(1) X = Don't care.

Table 2. TPS3106 FUNCTION TABLE

| MR | $V_{(SENSE)} > 0.551 \text{ V}$ | $V_{DD} > V_{IT}$ | RSTVDD | RSTSENSE |
|----|---------------------------------|-------------------|--------|----------|
| L  | X <sup>(1)</sup>                | X                 | L      | L        |
| H  | 0                               | 0                 | L      | L        |
| H  | 0                               | 1                 | H      | L        |
| H  | 1                               | 0                 | L      | H        |
| H  | 1                               | 1                 | H      | H        |

(1) X = Don't care.


Table 3. TPS3110 FUNCTION TABLE<sup>(1)</sup>

| MR | $V_{(SENSE)} > 0.551 \text{ V}$ | $V_{DD} > V_{IT}$ | RESET |
|----|---------------------------------|-------------------|-------|
| L  | X <sup>(2)</sup>                | X                 | L     |
| H  | 0                               | 0                 | L     |
| H  | 0                               | 1                 | L     |
| H  | 1                               | 0                 | L     |
| H  | 1                               | 1                 | H     |

(1) Function of watchdog-timer not shown.

(2) X = Don't care.

## PIN DESCRIPTIONS


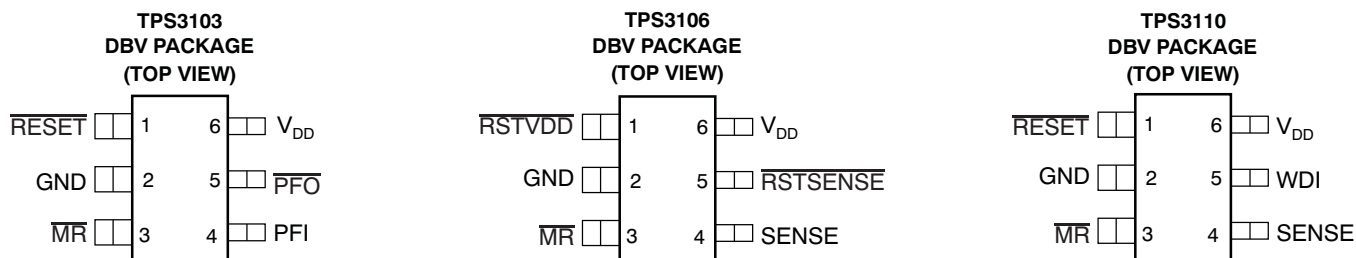


## TERMINAL FUNCTIONS

| TERMINAL        |                     |     | DESCRIPTION   |
|-----------------|---------------------|-----|---|
| NAME            | DEVICE              | NO. |   |
| GND             | ALL                 | 2   | GND   |
| MR              | ALL                 | 3   | Manual-reset input. Pull low to force a reset. $\overline{\text{RESET}}$ remains low as long as $\overline{\text{MR}}$ is low and for the timeout period after $\overline{\text{MR}}$ goes high. Leave unconnected or connect to V <sub>DD</sub> when unused. |
| PFI             | TPS3103             | 4   | Power-fail input compares to 0.551 V with no additional delay. Connect to V <sub>DD</sub> if not used.  |
| PFO             | TPS3103             | 5   | Power-fail output. Goes high when voltage at PFI rises above 0.551 V.   |
| RESET           | TPS3103,<br>TPS3110 | 1   | Active-low reset output. Either push-pull or open-drain output stage.   |
| RSTSENSE        | TPS3106             | 5   | Active-low reset output. Logic level at RSTSENSE only depends on the voltage at SENSE and the status of MR.   |
| RSTVDD          | TPS3106             | 1   | Active-low reset output. Logic level at RSTVDD only depends on the voltage at V <sub>DD</sub> and the status of MR.   |
| SENSE           | TPS3106,<br>TPS3110 | 4   | A reset will be asserted if the voltage at SENSE is lower than 0.551 V. Connect to V <sub>DD</sub> if unused.   |
| V <sub>DD</sub> | ALL                 | 6   | Supply voltage. Powers the device and monitors its own voltage.   |
| WDI             | TPS3110             | 5   | Watchdog timer input. If WDI remains high or low longer than the time-out period, then reset is triggered. The timer clears when reset is asserted or when WDI sees a rising edge or a falling edge.  |


## TIMING DIAGRAMS

### Timing Diagrams for TPS3103

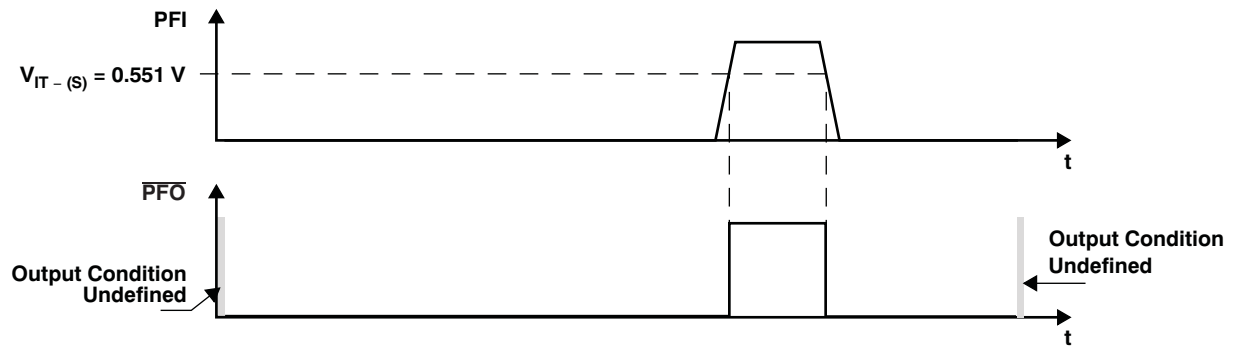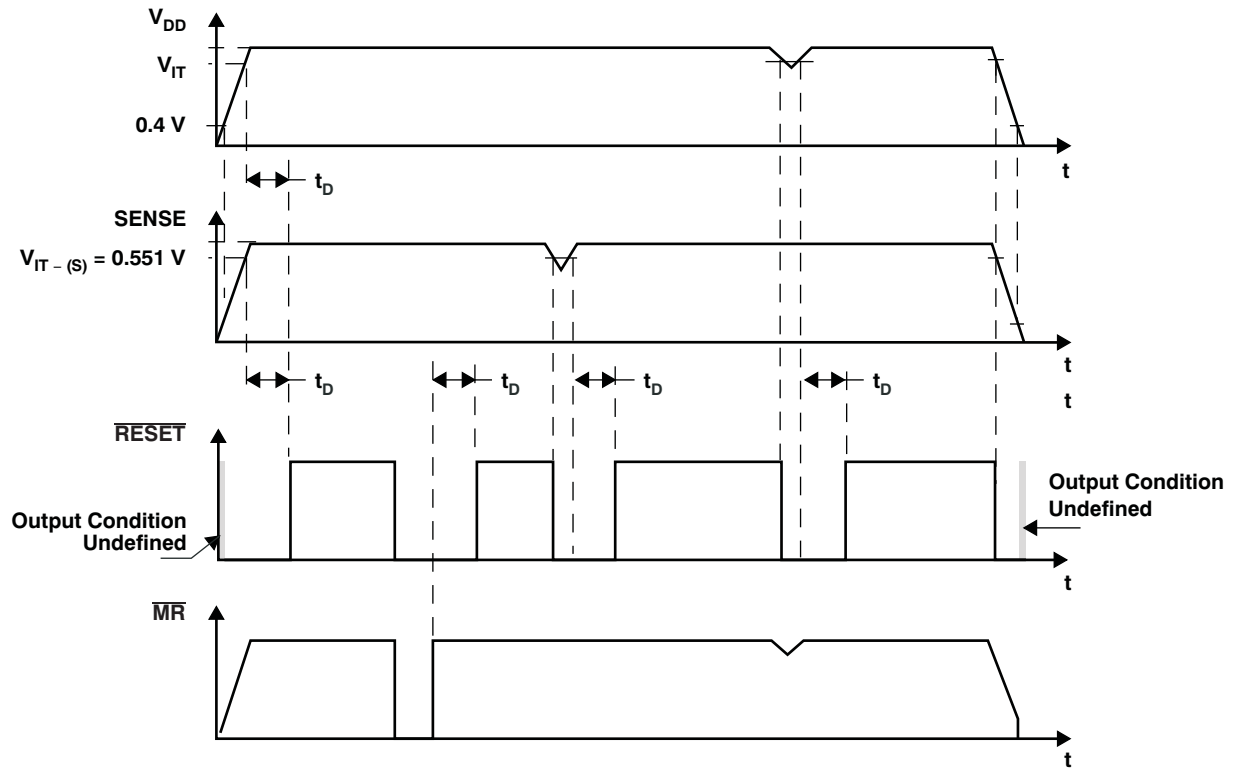




### Timing Diagram for TPS3106

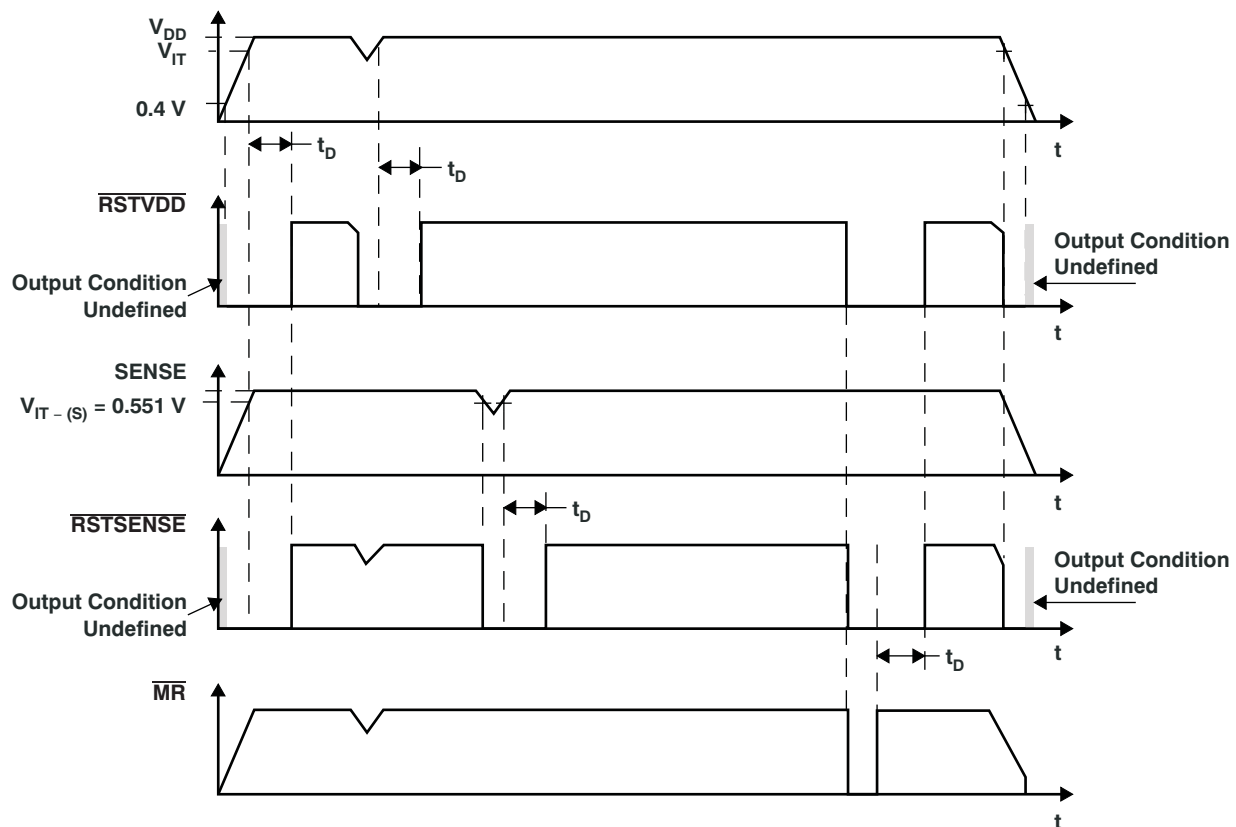

Timing Diagram for TPS3110

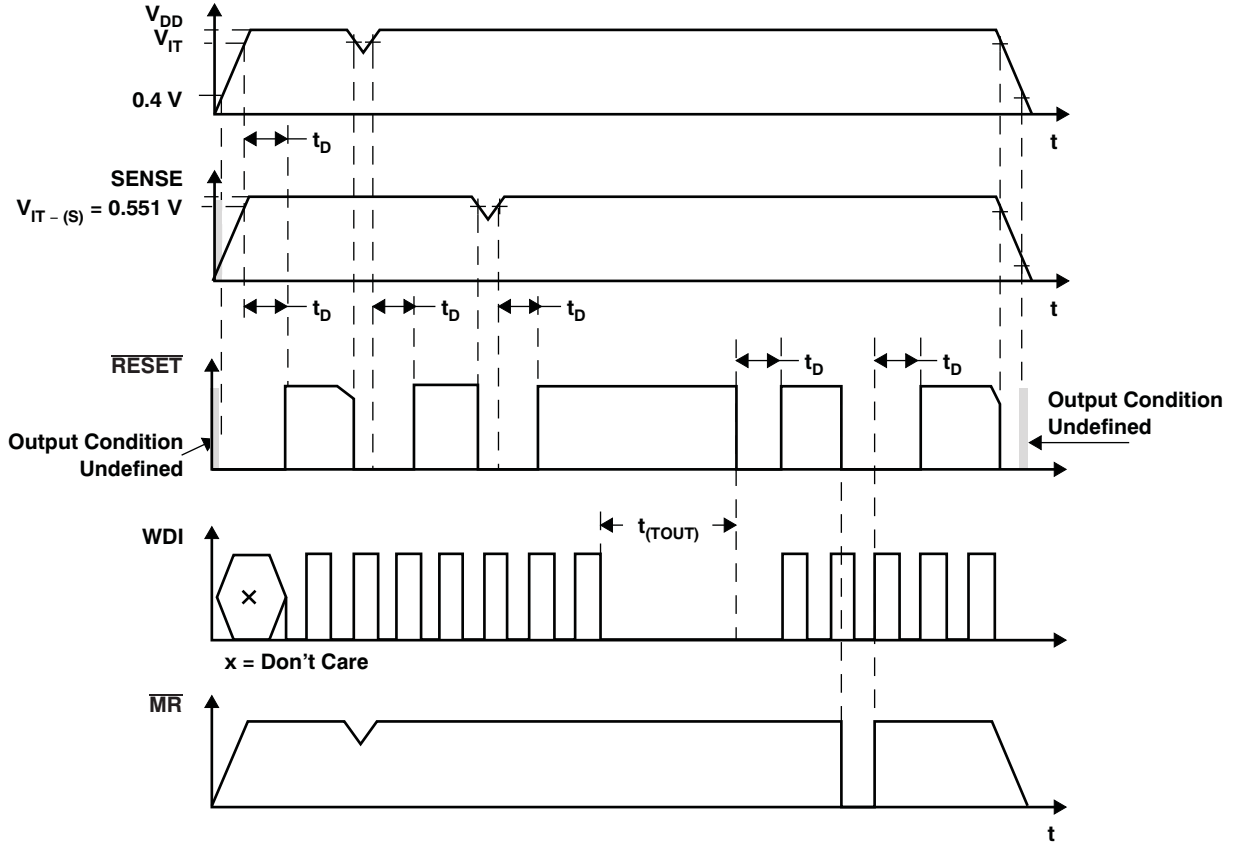

TYPICAL CHARACTERISTICS

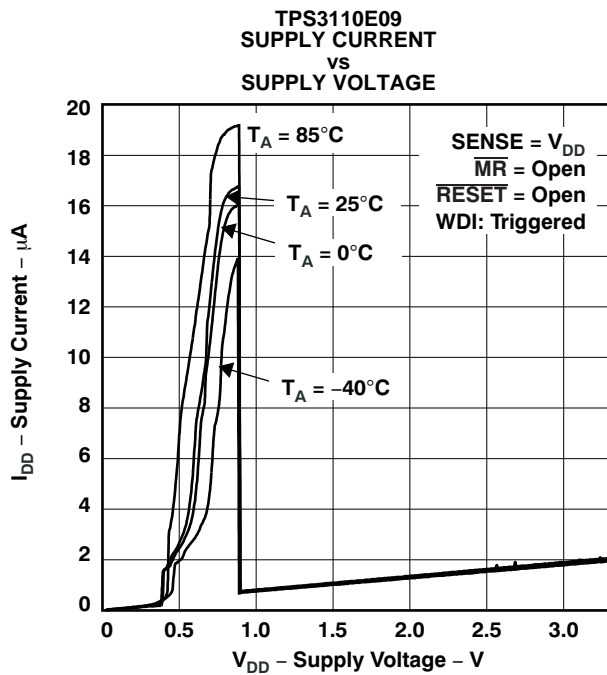


Figure 1.

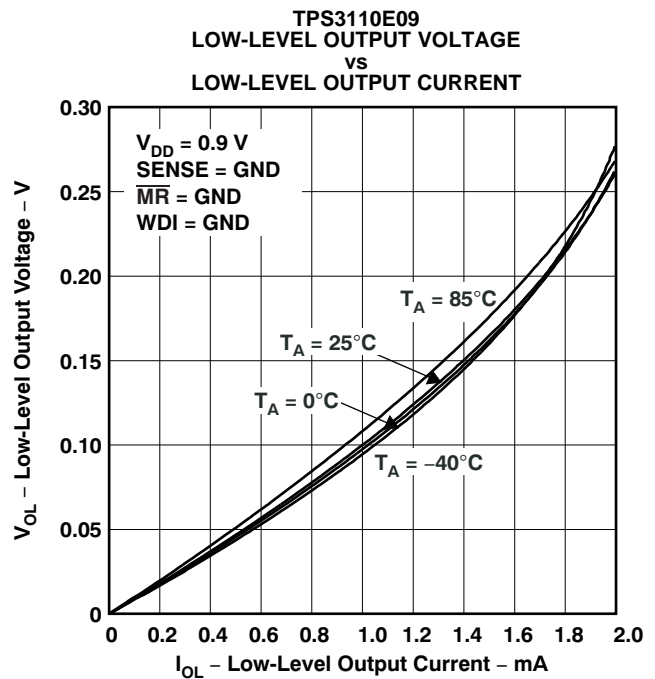


Figure 2.

TYPICAL CHARACTERISTICS (continued)

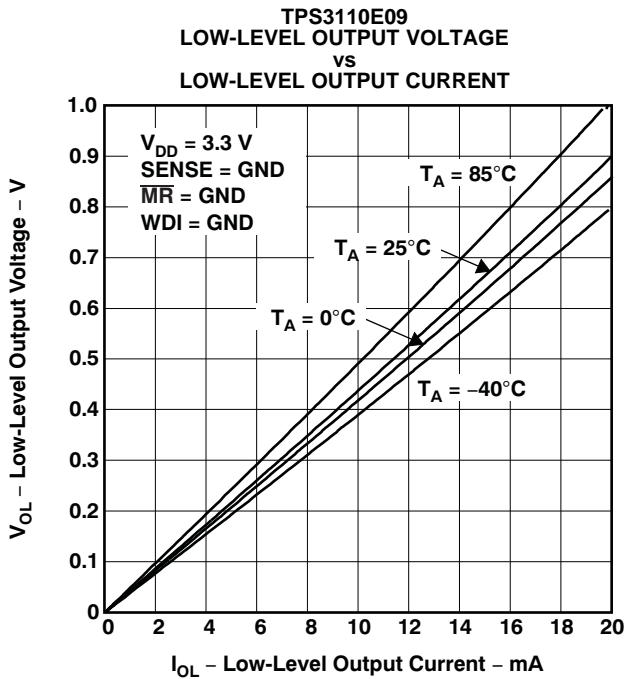


Figure 3.

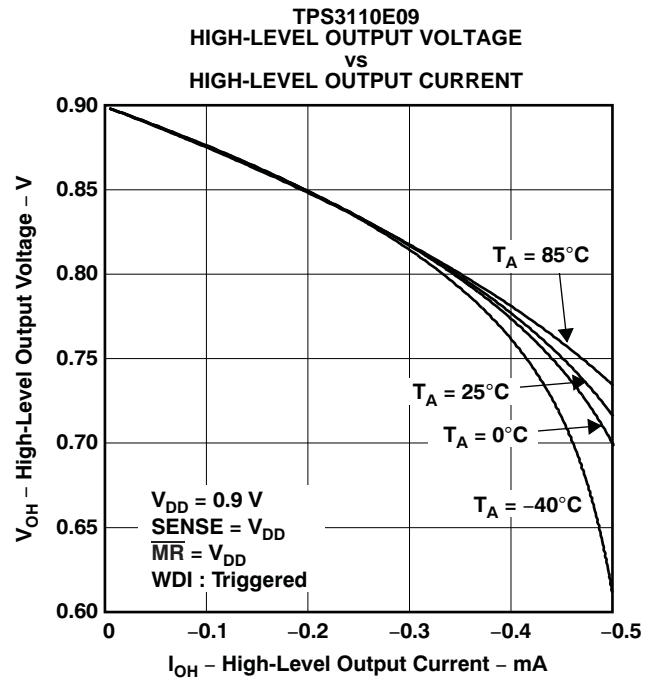


Figure 4.

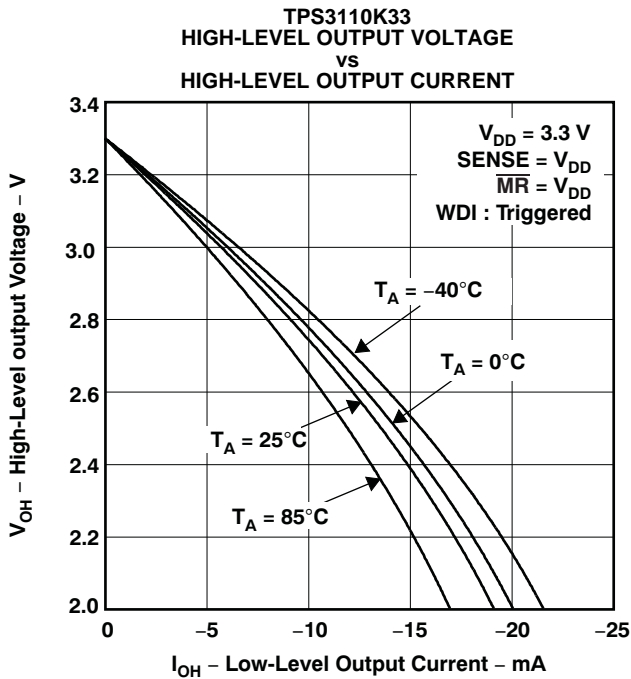


Figure 5.

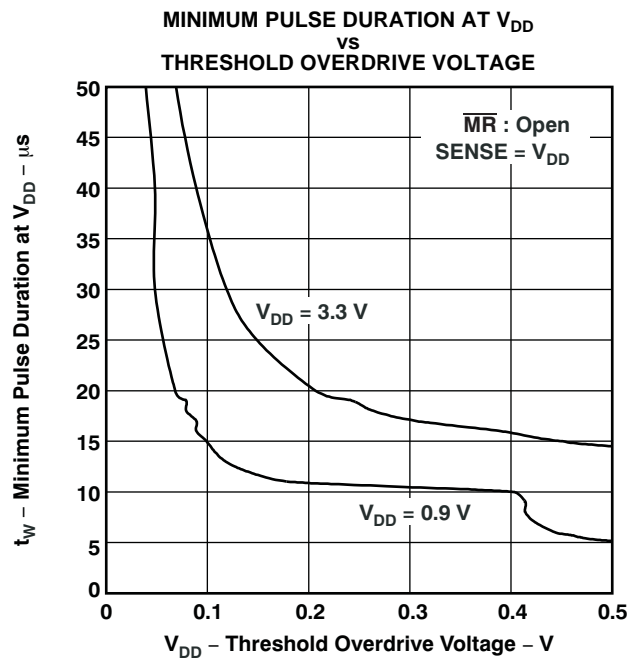


Figure 6.

### TYPICAL CHARACTERISTICS (continued)

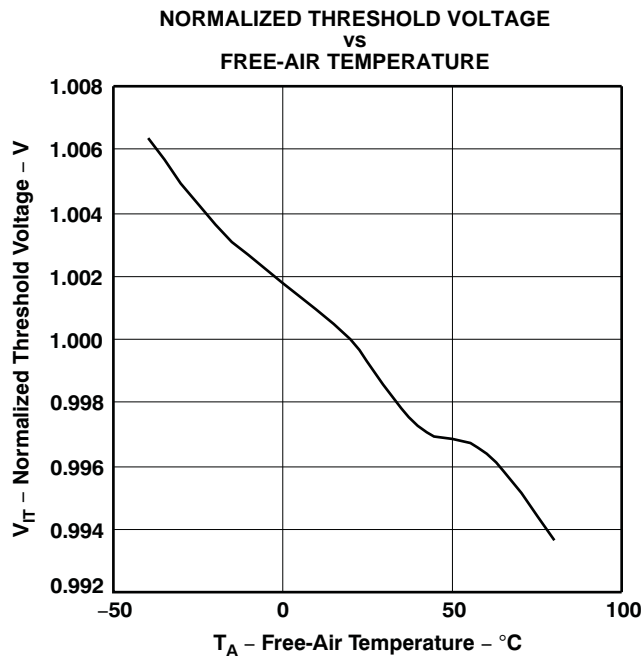


Figure 7.

## APPLICATION INFORMATION

The TPS31xx family has a quiescent current in the 1- $\mu$ A to 2- $\mu$ A range. When  $\overline{\text{RESET}}$  is active, triggered by the voltage monitored at  $V_{\text{DD}}$ , the quiescent current increases to about 20  $\mu$ A (see the [Electrical Characteristics](#)).

In some applications it is necessary to minimize the quiescent current even during the reset period. This is especially true when the voltage of a battery is supervised and the  $\overline{\text{RESET}}$  is used to shut down the system or for an early warning. In this case the reset condition will last for a longer period of time. The current drawn from the battery should almost be zero, especially when the battery is discharged.

For this kind of application, either the TPS3103 or TPS3106 is a good fit. To minimize current consumption, select a version where the threshold voltage is lower than the voltage monitored at  $V_{\text{DD}}$ . The TPS3106 has two reset outputs. One output ( $\overline{\text{RSTVDD}}$ ) is triggered from the voltage monitored at  $V_{\text{DD}}$ . The other output ( $\overline{\text{RSTSENSE}}$ ) is triggered from the voltage monitored at SENSE. In the application shown in [Figure 8](#), the TPS3106E09 is used to monitor the input voltage of two NiCd or NiMH cells. The threshold voltage ( $V_{\text{TH}}$ ) = 0.86 V) was chosen as low as possible to ensure that the supply voltage is always higher than the threshold voltage at  $V_{\text{DD}}$ . The voltage of the battery is monitored using the SENSE input. The voltage divider was calculated to assert a reset using the  $\overline{\text{RSTSENSE}}$  output at  $2 \times 0.8 \text{ V} = 1.6 \text{ V}$ .

$$R1 = R2 \times \left( \frac{V_{\text{TRIP}}}{V_{\text{IT(S)}}} - 1 \right) \quad (1)$$

where:

$V_{\text{TRIP}}$  is the voltage of the battery at which a reset is asserted and


$V_{\text{IT(S)}}$  is the threshold voltage at SENSE = 0.551 V.

R1 was chosen for a resistor current in the 1- $\mu$ A range.

With  $V_{\text{TRIP}} = 1.6 \text{ V}$ :

$$R1 \cong 1.9 \times R2$$

$$R1 = 820 \text{ k}\Omega, R2 = 430 \text{ k}\Omega$$

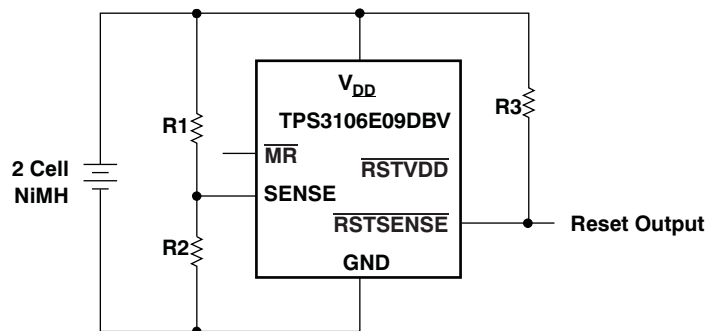

**Figure 8. Battery Monitoring with 3- $\mu$ A Supply Current for Device and Resistor Divider**

## WATCHDOG

The TPS3110 device integrates a watchdog timer that must be periodically triggered by a positive or negative transition of WDI. When the supervising system fails to retrigger the watchdog circuit within the time-out interval,  $\overline{\text{RESET}}$  becomes active for the time period ( $t_D$ ). This event also reinitializes the watchdog timer.

## MANUAL RESET ( $\overline{\text{MR}}$ )

Many  $\mu\text{C}$ -based products require manual-reset capability, allowing an operator or logic circuitry to initiate a reset. Logic low at  $\overline{\text{MR}}$  asserts reset. Reset remains asserted while  $\overline{\text{MR}}$  is low and for a time period ( $t_D$ ) after  $\overline{\text{MR}}$  returns high. The input has an internal 100-k $\Omega$  pull-up resistor, so it can be left open if it is unused.

Connect a normally open momentary switch from  $\overline{\text{MR}}$  to GND to create a manual reset function. External debounce is not required. If  $\overline{\text{MR}}$  is driven from long cables or if the device is used in noisy environments, connecting a 0.1- $\mu\text{F}$  capacitor from  $\overline{\text{MR}}$  to GND provides additional noise immunity.

If there is a possibility of transient or DC conditions causing  $\overline{\text{MR}}$  to rise above  $V_{DD}$ , a diode should be used to limit  $\overline{\text{MR}}$  to a diode drop above  $V_{DD}$ .


## PFI, $\overline{\text{PFO}}$

The TPS3103 has an integrated power-fail (PFI) comparator with a separate open-drain ( $\overline{\text{PFO}}$ ) output. The PFI and  $\overline{\text{PFO}}$  can be used for low-battery detection, power-fail warning, or for monitoring a power supply other than the main supply, and has no effect on  $\overline{\text{RESET}}$ .

An additional comparator is provided to monitor voltages other than the nominal supply voltage. The power-fail input (PFI) will be compared with an internal voltage reference of 0.551 V. If the input voltage falls below the power-fail threshold ( $V_{IT(S)}$ ), the power-fail output ( $\overline{\text{PFO}}$ ) goes low. If it goes above 0.551 V plus approximately 15-mV hysteresis, the output returns to high. By connecting two external resistors, it is possible to supervise any voltage above 0.551 V. The sum of both resistors should be approximately 1 M $\Omega$ , to minimize power consumption and to assure that the current into the PFI pin can be neglected, compared with the current through the resistor network. The tolerance of the external resistors should be not more than 1% to ensure minimal variation of sensed voltage. If the power-fail comparator is unused, connect PFI to GND and leave  $\overline{\text{PFO}}$  unconnected. For proper operation of the PFI-comparator, the supply voltage ( $V_{DD}$ ) must be higher than 0.8 V.

## SENSE


The voltage at the SENSE input is compared with a reference voltage of 0.551 V. If the voltage at SENSE falls below the sense-threshold ( $V_{IT(S)}$ ), reset is asserted. On the TPS3106, a dedicated  $\overline{\text{RSTSENSE}}$  output is available. On the TPS3110, the logic signal from SENSE is OR-wired with the logic signal from  $V_{DD}$  or  $\overline{\text{MR}}$ . An internal timer delays the return of the output to the inactive state, once the voltage at SENSE goes above 0.551 V plus about 15 mV of hysteresis. For proper operation of the SENSE-comparator, the supply voltage must be higher than 0.8 V.

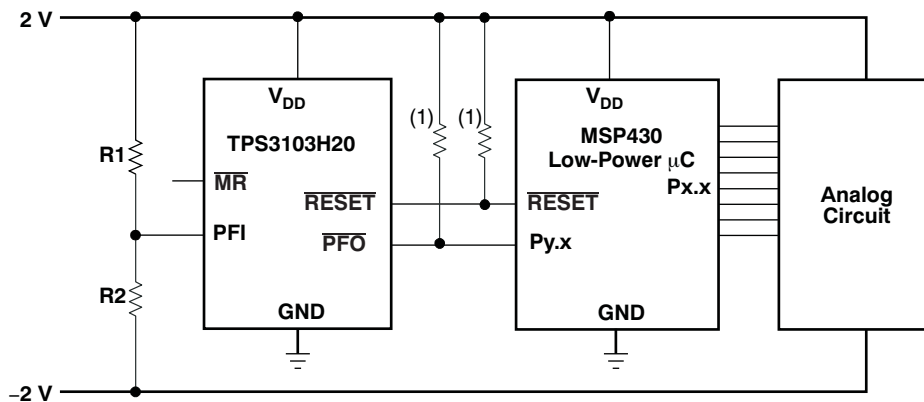

$$V_{(\text{NEG\_TH})} = 0.551 \text{ V} - \frac{R2}{R1} (V_{\text{DD}} - 0.551 \text{ V})$$

(1) Resistor may be integrated in  $\mu\text{C}$ .

**Figure 9. TPS3103 Monitoring a Negative Voltage**

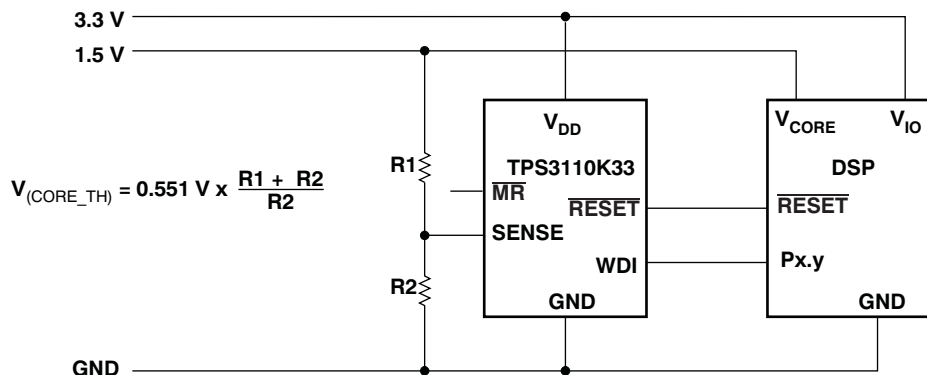

$$V_{(\text{CORE\_TH})} = 0.551 \text{ V} \times \frac{R1 + R2}{R2}$$

**Figure 10. TPS3110 in a DSP-System Monitoring Both Supply Voltages**

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| SN0402002DBVR    | ACTIVE                | SOT-23       | DBV             | 6    |             | TBD                     | Call TI          | Call TI                      |
| TPS3103E12DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103E12DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103E12DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103E12DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103E15DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103E15DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103E15DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103E15DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103H20DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103H20DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103H20DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103H20DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103K33DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103K33DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103K33DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3103K33DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106E09DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106E09DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106E09DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106E09DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106E16DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106E16DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106E16DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106E16DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |



| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TPS3106K33DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106K33DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106K33DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3106K33DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E09DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E09DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E09DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E09DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E12DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E12DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E12DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E12DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E15DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E15DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E15DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110E15DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110K33DBVR   | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110K33DBVRG4 | ACTIVE                | SOT-23       | DBV             | 6    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110K33DBVT   | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS3110K33DBVTG4 | ACTIVE                | SOT-23       | DBV             | 6    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered

at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**



**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**




\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS3103E12DBVR | SOT-23       | DBV             | 6    | 3000 | 179.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3103E12DBVT | SOT-23       | DBV             | 6    | 250  | 179.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3103E15DBVR | SOT-23       | DBV             | 6    | 3000 | 179.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3103E15DBVT | SOT-23       | DBV             | 6    | 250  | 179.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3103H20DBVR | SOT-23       | DBV             | 6    | 3000 | 179.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3103H20DBVT | SOT-23       | DBV             | 6    | 250  | 179.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3103K33DBVR | SOT-23       | DBV             | 6    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3103K33DBVT | SOT-23       | DBV             | 6    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3103K33DBVT | SOT-23       | DBV             | 6    | 250  | 179.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3106E09DBVR | SOT-23       | DBV             | 6    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3106E09DBVT | SOT-23       | DBV             | 6    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3106E16DBVR | SOT-23       | DBV             | 6    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3106E16DBVT | SOT-23       | DBV             | 6    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3106K33DBVR | SOT-23       | DBV             | 6    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3106K33DBVT | SOT-23       | DBV             | 6    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3110E09DBVR | SOT-23       | DBV             | 6    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3110E09DBVT | SOT-23       | DBV             | 6    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS3110E12DBVR | SOT-23       | DBV             | 6    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3110E12DBVT | SOT-23       | DBV             | 6    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3110E15DBVR | SOT-23       | DBV             | 6    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3110E15DBVT | SOT-23       | DBV             | 6    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3110K33DBVR | SOT-23       | DBV             | 6    | 3000 | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS3110K33DBVT | SOT-23       | DBV             | 6    | 250  | 180.0              | 9.0                | 3.15    | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |

**TAPE AND REEL BOX DIMENSIONS**

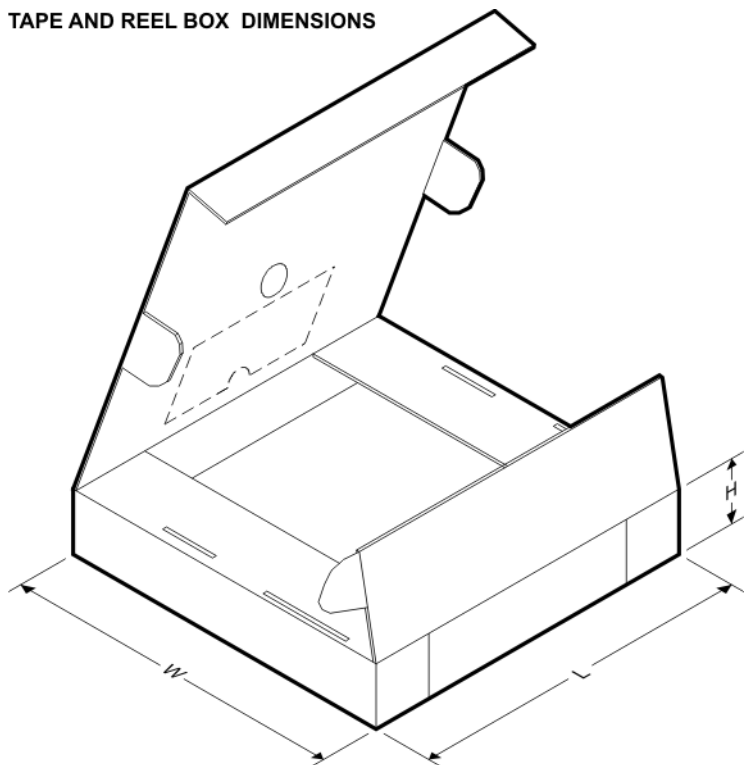

\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS3103E12DBVR | SOT-23       | DBV             | 6    | 3000 | 195.0       | 200.0      | 45.0        |
| TPS3103E12DBVT | SOT-23       | DBV             | 6    | 250  | 195.0       | 200.0      | 45.0        |
| TPS3103E15DBVR | SOT-23       | DBV             | 6    | 3000 | 195.0       | 200.0      | 45.0        |
| TPS3103E15DBVT | SOT-23       | DBV             | 6    | 250  | 195.0       | 200.0      | 45.0        |
| TPS3103H20DBVR | SOT-23       | DBV             | 6    | 3000 | 195.0       | 200.0      | 45.0        |
| TPS3103H20DBVT | SOT-23       | DBV             | 6    | 250  | 195.0       | 200.0      | 45.0        |
| TPS3103K33DBVR | SOT-23       | DBV             | 6    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS3103K33DBVT | SOT-23       | DBV             | 6    | 3000 | 195.0       | 200.0      | 45.0        |
| TPS3103K33DBVT | SOT-23       | DBV             | 6    | 250  | 182.0       | 182.0      | 20.0        |
| TPS3103K33DBVT | SOT-23       | DBV             | 6    | 250  | 195.0       | 200.0      | 45.0        |
| TPS3106E09DBVR | SOT-23       | DBV             | 6    | 3000 | 182.0       | 182.0      | 20.0        |

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS3106E09DBVT | SOT-23       | DBV             | 6    | 250  | 182.0       | 182.0      | 20.0        |
| TPS3106E16DBVR | SOT-23       | DBV             | 6    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS3106E16DBVT | SOT-23       | DBV             | 6    | 250  | 182.0       | 182.0      | 20.0        |
| TPS3106K33DBVR | SOT-23       | DBV             | 6    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS3106K33DBVT | SOT-23       | DBV             | 6    | 250  | 182.0       | 182.0      | 20.0        |
| TPS3110E09DBVR | SOT-23       | DBV             | 6    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS3110E09DBVT | SOT-23       | DBV             | 6    | 250  | 182.0       | 182.0      | 20.0        |
| TPS3110E12DBVR | SOT-23       | DBV             | 6    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS3110E12DBVT | SOT-23       | DBV             | 6    | 250  | 182.0       | 182.0      | 20.0        |
| TPS3110E15DBVR | SOT-23       | DBV             | 6    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS3110E15DBVT | SOT-23       | DBV             | 6    | 250  | 182.0       | 182.0      | 20.0        |
| TPS3110K33DBVR | SOT-23       | DBV             | 6    | 3000 | 182.0       | 182.0      | 20.0        |
| TPS3110K33DBVT | SOT-23       | DBV             | 6    | 250  | 182.0       | 182.0      | 20.0        |

DBV (R-PDSO-G6)

PLASTIC SMALL-OUTLINE PACKAGE



- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
  - D. Leads 1,2,3 may be wider than leads 4,5,6 for package orientation.
- $\triangle E$  Falls within JEDEC MO-178 Variation AB, except minimum lead width.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                             |  |
|-----------------------------|--|
| Amplifiers                  | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             |
| Data Converters             | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     |
| DSP                         | <a href="http://dsp.ti.com">dsp.ti.com</a>                         |
| Clocks and Timers           | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>           |
| Interface                   | <a href="http://interface.ti.com">interface.ti.com</a>             |
| Logic                       | <a href="http://logic.ti.com">logic.ti.com</a>                     |
| Power Mgmt                  | <a href="http://power.ti.com">power.ti.com</a>                     |
| Microcontrollers            | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> |
| RFID                        | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>               |
| RF/IF and ZigBee® Solutions | <a href="http://www.ti.com/lprf">www.ti.com/lprf</a>               |

### Applications

|                    |  |
|--------------------|--|
| Audio              | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Automotive         | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| Broadband          | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Digital Control    | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Medical            | <a href="http://www.ti.com/medical">www.ti.com/medical</a>               |
| Military           | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Optical Networking | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Security           | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
| Telephony          | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
| Video & Imaging    | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
| Wireless           | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2008, Texas Instruments Incorporated