



Improved Current Mode PWM Controller

FEATURES

- Pin-for-Pin Compatible With the UC3846
- 65ns Typical Delay From Shutdown to Outputs, and 50ns Typical Delay From Sync to Outputs
- Improved Current Sense Amplifier With Reduced Noise Sensitivity
- Differential Current Sense with 3V Common Mode Range
- Trimmed Oscillator Discharge Current for Accurate Deadband Control
- Accurate 1V Shutdown Threshold
- High Current Dual Totem Pole Outputs (1.5A peak)
- TTL Compatible Oscillator SYNC Pin Thresholds
- 4kV ESD Protection

DESCRIPTION


The UC3856 is a high performance version of the popular UC3846 series of current mode controllers, and is intended for both design upgrades and new applications where speed and accuracy are important. All input to output delays have been minimized, and the current sense output is slew rate limited to reduce noise sensitivity. Fast 1.5A peak output stages have been added to allow rapid switching of power FETs.

A low impedance TTL compatible sync output has been implemented with a tri-state function when used as a sync input.

Internal chip grounding has been improved to minimize internal "noise" caused when driving large capacitive loads. This, in conjunction with the improved differential current sense amplifier results in enhanced noise immunity.

Other features include a trimmed oscillator current (8%) for accurate frequency and dead time control; a 1V, 5% shutdown threshold; and 4kV minimum ESD protection on all pins.

BLOCK DIAGRAM

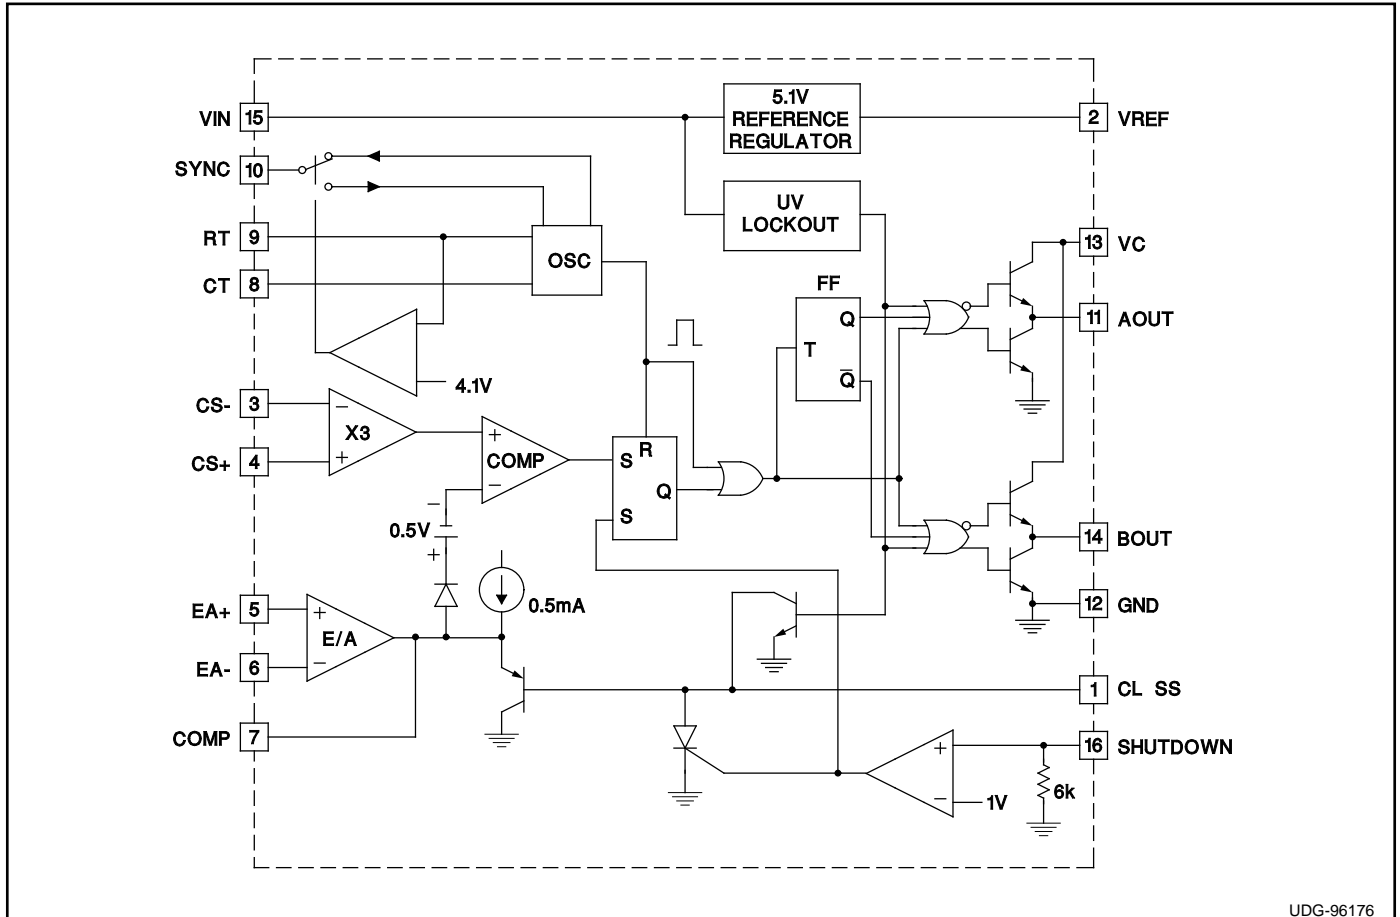

UDG-96176


ABSOLUTE MAXIMUM RATINGS

| | |
|---|-----------------|
| Supply Voltage | +40V |
| Collector Supply Voltage | +40V |
| Output Current, Source or Sink | |
| DC | 0.5A |
| Pulse (0.5 μ s) | 2.0A |
| Error Amp Inputs | -0.3V to +VIN |
| Shutdown Input | -0.3V to +10V |
| Current Sense Inputs | -0.3V to +3V |
| SYNC Output Current | \pm 10mA |
| Error Amplifier Output Current | -5mA |
| Soft Start Sink Current | 50mA |
| Oscillator Charging Current | 5mA |
| Power Dissipation at TA = 25°C (Note 2) | 1000mW |
| Power Dissipation at TC = 25°C (Note 2) | 2000mW |
| Junction Temperature | -55°C to +150°C |
| Storage Temperature Range | -65°C to +150°C |
| Lead Temperature (Soldering, 10 sec.) | +300°C |


All voltages are with respect to Ground. Currents are positive into, negative out of the specified terminal. Consult packaging section of databook for thermal limitations and considerations of package.

CONNECTION DIAGRAMS


DIL-16, SOIC-16 (Top View)
J or N, DW PACKAGE

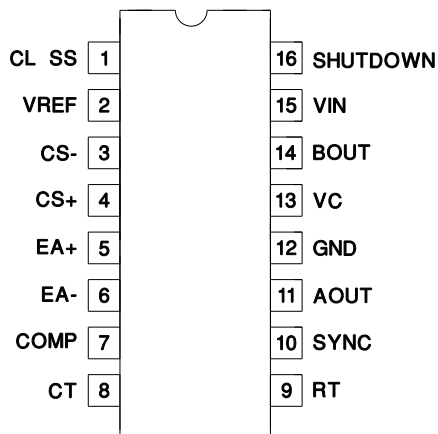

PLCC-28 (Top View)
QP PACKAGE

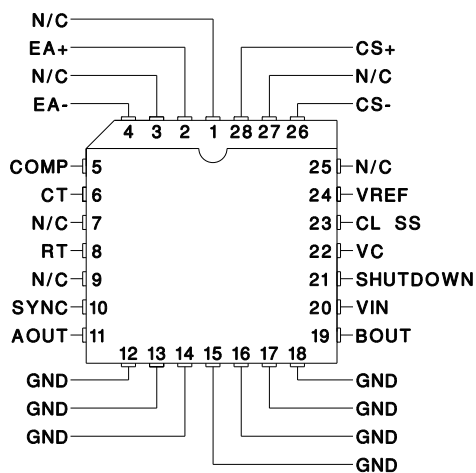

PLCC-20 (Top View)
Q PACKAGE

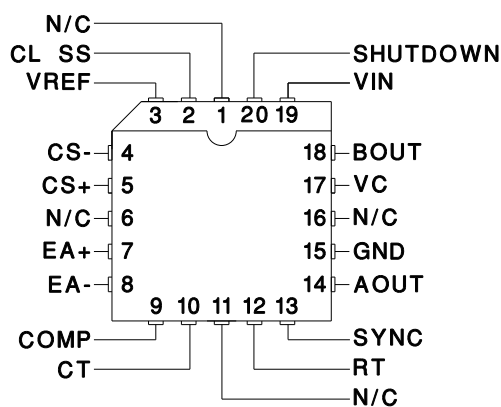

ELECTRICAL CHARACTERISTICS Unless otherwise stated, these specifications apply for TA = -55°C to +125°C for UC1856; -40°C to +85°C for the UC2856; and 0°C to +70°C for the UC3856, VIN = 15V, RT = 10k, CT = 1nF, TA = TJ.

| PARAMETER | TEST CONDITIONS | UC1856/UC2856 | | | UC3856 | | | UNITS |
|---------------------------|-------------------------------|---------------|------|------|--------|------|------|---------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Reference Section | | | | | | | | |
| Output Voltage | TJ = 25°C, Io = 1mA | 5.05 | 5.10 | 5.15 | 5.00 | 5.10 | 5.20 | V |
| Line Regulation | VIN = 8V to 40V | | | 20 | | | 20 | mV |
| Load Regulation | Io = -1mA to -10mA | | | 15 | | | 15 | mV |
| Total Output Variation | Line, Load, and Temperature | 5.00 | | 5.20 | 4.95 | | 5.25 | V |
| Output Noise Voltage | 10Hz < f < 10kHz, TJ = 25°C | | 50 | | | 50 | | μ V |
| Long Term Stability | TJ = 125°C, 1000 Hrs (Note 2) | | 5 | 25 | | 5 | 25 | mV |
| Short Circuit Current | VREF = 0V | -25 | -45 | -65 | -25 | -45 | -65 | mA |
| Oscillator Section | | | | | | | | |
| Initial Accuracy | TJ = 25°C | 180 | 200 | 220 | 180 | 200 | 220 | kHz |
| | Over Operating Range | 170 | | 230 | 170 | | 230 | kHz |

ELECTRICAL CHARACTERISTICS (cont.) Unless otherwise stated, these specifications apply for $T_A = -55^\circ\text{C}$ to $+125^\circ\text{C}$ for UC1856; -40°C to $+85^\circ\text{C}$ for the UC2856; and 0°C to $+70^\circ\text{C}$ for the UC3856, $V_{IN} = 15\text{V}$, $R_T = 10\text{k}$, $C_T = 1\text{nF}$, $T_A = T_J$.

| PARAMETER | TEST CONDITIONS | UC1856/UC2856 | | | UC3856 | | | UNITS |
|---|--|---------------|------|--------------|--------|------|--------------|---------------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Oscillator Section (cont.) | | | | | | | | |
| Voltage Stability | $V_{IN} = 8\text{V to }40\text{V}$ | | | 2 | | | 2 | % |
| Discharge Current | $T_J = 25^\circ\text{C}$, $V_{CT} = 2\text{V}$ | 7.5 | 8.0 | 8.8 | 7.5 | 8.0 | 8.8 | mA |
| | $V_{CT} = 2\text{V}$ | 6.7 | 8.0 | 8.8 | 6.7 | 8.0 | 8.8 | mA |
| Sync Output High Level | $I_o = -1\text{mA}$ | 2.4 | 3.6 | | 2.4 | 3.6 | | V |
| Sync Output Low Level | $I_o = +1\text{mA}$ | | 0.2 | 0.4 | | 0.2 | 0.4 | V |
| Sync Input High Level | $C_T = 0\text{V}$, $R_T = V_{REF}$ | 2.0 | 1.5 | | 2.0 | 1.5 | | V |
| Sync Input Low Level | $C_T = 0\text{V}$, $R_T = V_{REF}$ | | 1.5 | 0.8 | | 1.5 | 0.8 | V |
| Sync Input Current | $C_T = 0\text{V}$, $R_T = V_{REF}$ $V_{SYNC} = 5\text{V}$ | | 1 | 10 | | 1 | 10 | μA |
| Sync Delay to Outputs | $C_T = 0\text{V}$, $R_T = V_{REF}$ $V_{SYNC} = 0.8\text{V to }2\text{V}$ | | 50 | 100 | | 50 | 100 | ns |
| Error Amplifier Section | | | | | | | | |
| Input Offset Voltage | $V_{CM} = 2\text{V}$ | | | 5 | | | 10 | mV |
| Input Bias Current | | | | -1 | | | -1 | μA |
| Input Offset Current | | | | 500 | | | 500 | nA |
| Common Mode Range | $V_{IN} = 8\text{V to }40\text{V}$ | 0 | | $V_{IN} - 2$ | 0 | | $V_{IN} - 2$ | V |
| Open Loop Gain | $V_o = 1.2\text{V to }3\text{V}$ | 80 | 100 | | 80 | 100 | | dB |
| Unity Gain Bandwidth | $T_J = 25^\circ\text{C}$ | 1 | 1.5 | | 1 | 1.5 | | MHz |
| CMRR | $V_{CM} = 0\text{V to }38\text{V}$, $V_{IN} = 40\text{V}$ | 75 | 100 | | 75 | 100 | | dB |
| PSRR | $V_{IN} = 8\text{V to }40\text{V}$ | 80 | 100 | | 80 | 100 | | dB |
| Output Sink Current | $V_{ID} = -15\text{mV}$, $V_{COMP} = 1.2\text{V}$ | 5 | 10 | | 5 | 10 | | mA |
| Output Source Current | $V_{ID} = 15\text{mV}$, $V_{COMP} = 2.5\text{V}$ | -0.4 | -0.5 | | -0.4 | -0.5 | | mA |
| Output High Level | $V_{ID} = 50\text{mV}$, $R_L (\text{COMP}) = 15\text{k}$ | 4.3 | 4.6 | 4.9 | 4.3 | 4.6 | 4.9 | V |
| Output Low Level | $V_{ID} = -50\text{mV}$, $R_L (\text{COMP}) = 15\text{k}$ | | 0.7 | 1 | | 0.7 | 1 | V |
| Current Sense Amplifier Section | | | | | | | | |
| Amplifier Gain | $V_{CS-} = 0\text{V}$, CL SS Open (Notes 3,4) | 2.5 | 2.75 | 3.0 | 2.5 | 2.75 | 3.0 | V/V |
| Maximum Differential Input Signal ($V_{CS+} - V_{CS-}$) | CL SS Open (Note 3) $R_L (\text{COMP}) = 15\text{k}$ | 1.1 | 1.2 | | 1.1 | 1.2 | | V |
| Input Offset Voltage | $V_{CL\text{ ss}} = 0.5\text{V}$ COMP Open (Note 3) | | 5 | 35 | | 5 | 35 | mV |
| CMRR | $V_{CM} = 0\text{V to }3\text{V}$ | 60 | | | 60 | | | dB |
| PSRR | $V_{IN} = 8\text{V to }40\text{V}$ | 60 | | | 60 | | | dB |
| Input Bias Current | $V_{CL\text{ ss}} = 0.5\text{V}$, COMP Open (Note 3) | | | -1 | -3 | -1 | -3 | μA |
| Input Offset Current | $V_{CL\text{ ss}} = 0.5\text{V}$, COMP Open (Note 3) | | | 1 | | 1 | | mA |
| Input Common Mode Range | | 0 | | 3 | 0 | | 3 | V |
| Delay to Outputs | $V_{EA+} = V_{REF}$, $E_{A-} = 0\text{V}$ $CS+ - CS- = 0\text{V to }1.5\text{V}$ | | 120 | 250 | | 120 | 250 | ns |
| Current Limit Adjust Section | | | | | | | | |
| Current Limit Offset | $V_{CS-} = 0\text{V}$ $V_{CS+} = 0\text{V}$, COMP = Open (Note 3) | 0.43 | 0.5 | 0.57 | 0.43 | 0.5 | 0.57 | V |
| Input Bias Current | $V_{EA+} = V_{REF}$, $V_{EA-} = 0\text{V}$ | | -10 | -30 | | -10 | -30 | μA |
| Shutdown Terminal Section | | | | | | | | |
| Threshold Voltage | | 0.95 | 1.00 | 1.05 | 0.95 | 1.00 | 1.05 | V |
| Input Voltage Range | | 0 | | 5 | 0 | | 5 | V |

ELECTRICAL CHARACTERISTICS (cont.) Unless otherwise stated, these specifications apply for $T_A = -55^\circ\text{C}$ to $+125^\circ\text{C}$ for UC1856; -40°C to $+85^\circ\text{C}$ for the UC2856; and 0°C to $+70^\circ\text{C}$ for the UC3856, $V_{IN} = 15\text{V}$, $R_T = 10\text{k}$, $C_T = 1\text{nF}$, $T_A = T_J$.

| PARAMETER | TEST CONDITIONS | UC1856/UC2856 | | | UC3856 | | | UNITS |
|--|---|---------------|------|-----|--------|------|-----|-------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Shutdown Terminal Section (cont.) | | | | | | | | |
| Minimum Latching Current (I _{CL SS}) | (Note 5) | 3 | 1.5 | | 3 | 1.5 | | mA |
| Maximum Non-Latching Current (I _{CL SS}) | (Note 6) | | 1.5 | 0.8 | | 1.5 | 0.8 | mA |
| Delay to Outputs | V _{SHUTDOWN} = 0 to 1.3V | | 65 | 110 | | 65 | 110 | ns |
| Output Section | | | | | | | | |
| Collector-Emitter Voltage | | 40 | | | 40 | | | V |
| Off-State Bias Current | V _C = 40V | | | 250 | | | 250 | μA |
| Output Low Level | I _{OUT} = 20mA | | 0.1 | 0.5 | | 0.1 | 0.5 | V |
| | I _{OUT} = 200mA | | 0.5 | 2.6 | | 0.5 | 2.6 | V |
| Output High Level | I _{OUT} = -20mA | 12.5 | 13.2 | | 12.5 | 13.2 | | V |
| | I _{OUT} = -200mA | 12 | 13.1 | | 12 | 13.1 | | V |
| Rise Time | C1 = 1nF | | 40 | 80 | | 40 | 80 | ns |
| Fall Time | C1 = 1nF | | 40 | 80 | | 40 | 80 | ns |
| UVLO Low Saturation | V _{IN} = 0V, I _{OUT} = 20mA | | 0.8 | 1.5 | | 0.8 | 1.5 | V |
| PWM Section | | | | | | | | |
| Maximum Duty Cycle | | 45 | 47 | 50 | 45 | 47 | 50 | % |
| Minimum Duty Cycle | | | | 0 | | | 0 | % |
| Undervoltage Lockout Section | | | | | | | | |
| Startup Threshold | | | 7.7 | 8.0 | | 7.7 | 8.0 | V |
| Threshold Hysteresis | | | 0.7 | | | 0.7 | | V |
| Total Standby Current | | | | | | | | |
| Supply Current | | | 18 | 23 | | 18 | 23 | mA |

Note 1: All voltages are with respect to GND. Currents are positive into, negative out of the specified terminal.

Note 2: This parameter, although guaranteed over the recommended operating conditions is not 100% tested in production.

Note 3: Parameter measured at trip point of latch with $V_{EA+} = V_{REF}$, $V_{EA-} = 0\text{V}$.

Note 4: Amplifier gain defined as:

$$G = \frac{\Delta V_{COMP}}{\Delta V_{CS+}}; \quad \Delta V_{CS-} = 0\text{V to } 1.0\text{V}$$

Note 5: Current into CL SS guaranteed to latch circuit into shutdown state.

Note 6: Current into CL SS guaranteed not to latch circuit into shutdown state.

APPLICATIONS INFORMATION

Oscillator Circuit

Output deadtime is determined by size of the external capacitor, C_T , according to the formula: $T_d = \frac{2C_T}{8mA - \frac{3.6}{RT}}$

For large values of R_T : $T_d = 250C_T$



Oscillator frequency is approximated by the formula: $f_T = \frac{2}{R_T C_T}$

UDG-96177



Error Amplifier Output Configuration

If $I_f < 0.5mA$.
Error Amplifier can source up to 0.5mA.


UDG-96178

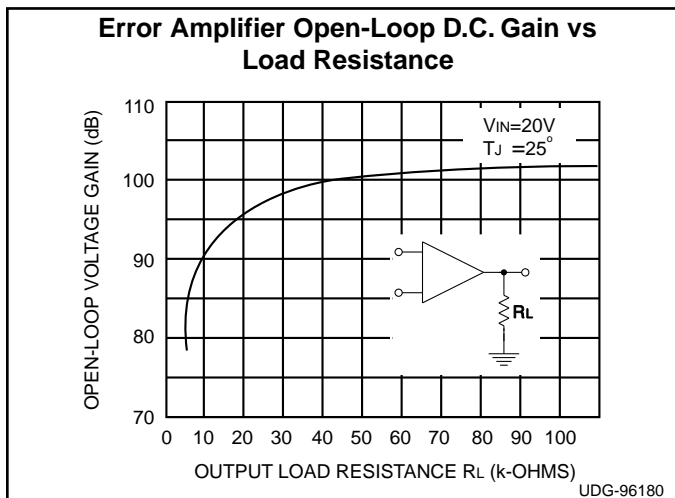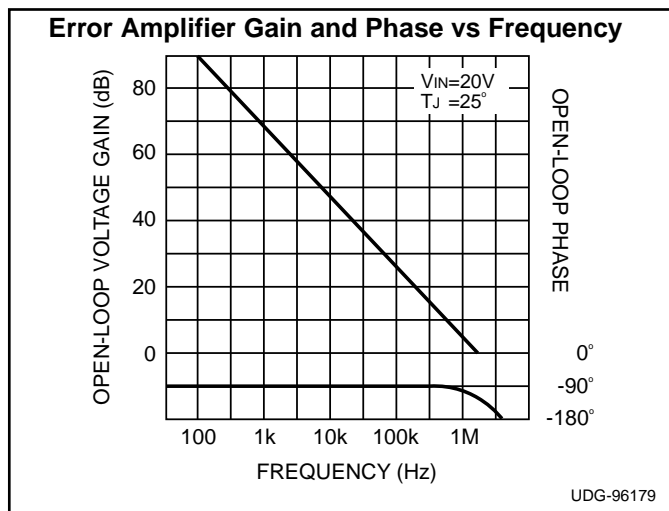


APPLICATIONS INFORMATION (cont.)

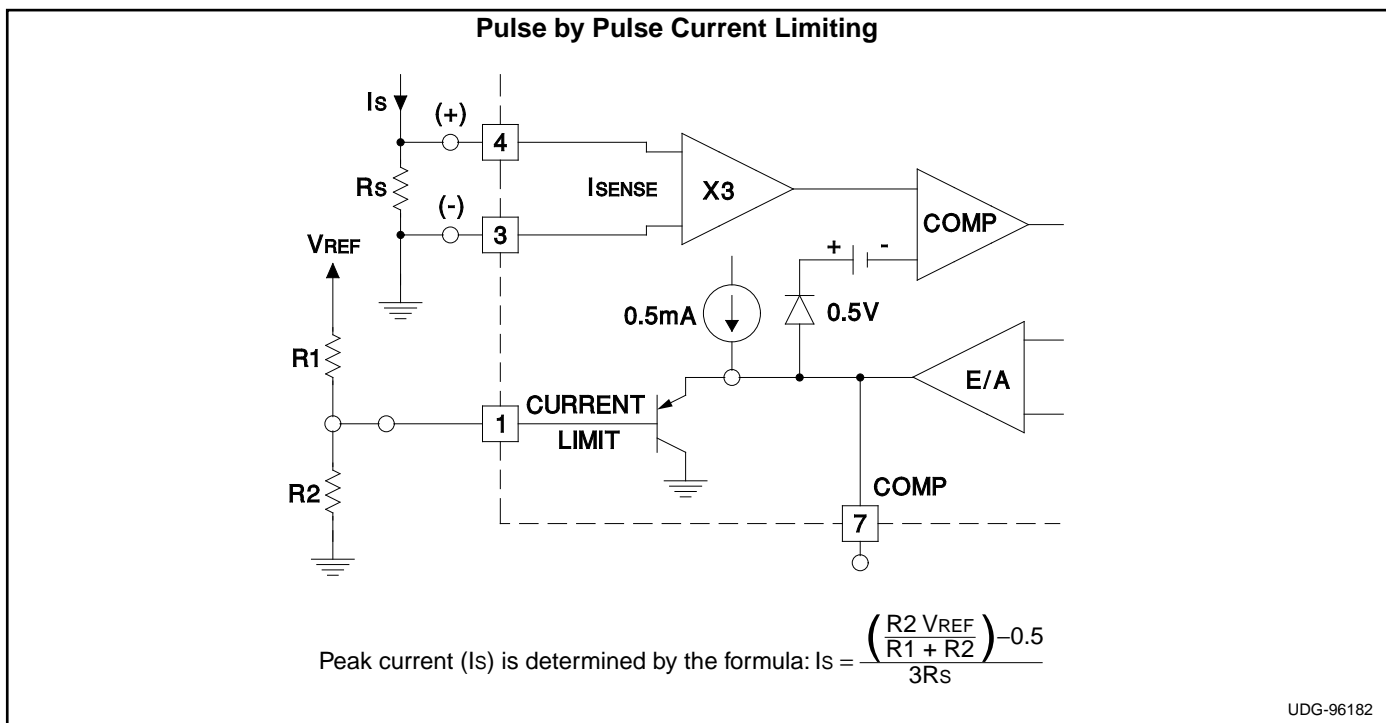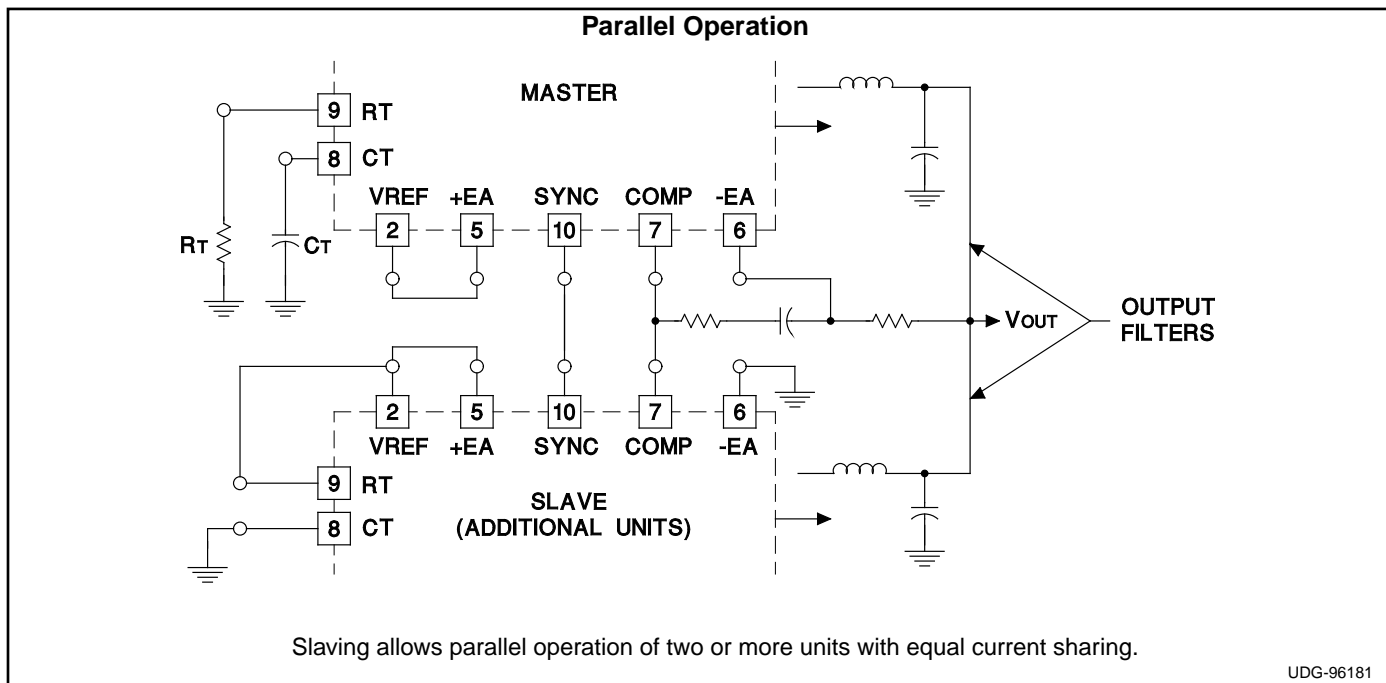

APPLICATIONS DATA (cont.)

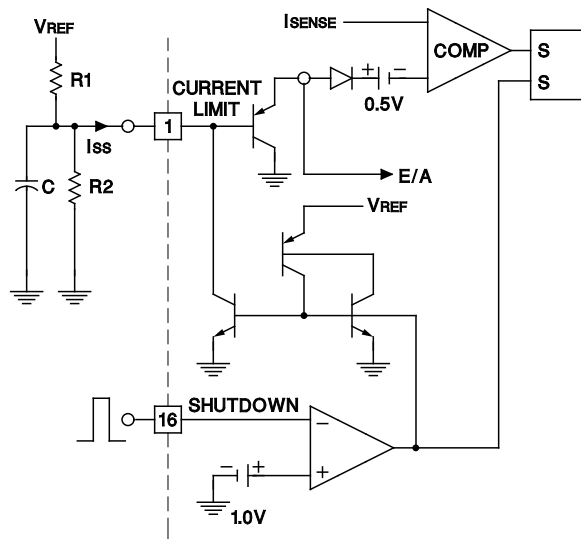

UDG-96183

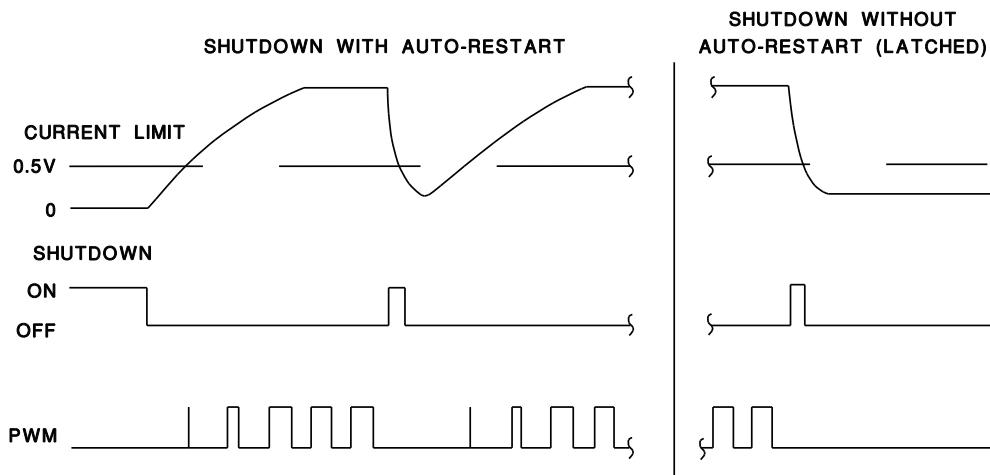


UDG-96184

If $\frac{V_{REF}}{R1} < 0.8\text{mA}$, the shutdown latch will commutate when $I_{SS} = 0.8\text{mA}$ and a restart cycle will be initiated.

If $\frac{V_{REF}}{R1} > 3\text{mA}$, the device will latch off until power is recycled.


Current Sense Amplifier Connections

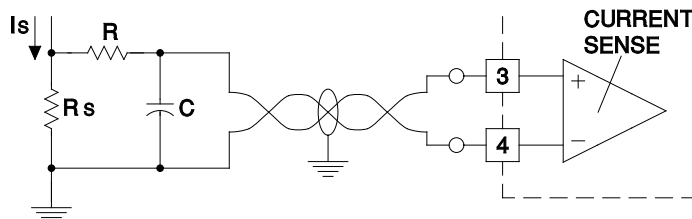

A small RC filter may be required in some applications to reduce switch transients. Differential input allows remote, noise sensing.

UDG-96185

APPLICATIONS INFORMATION (cont.)

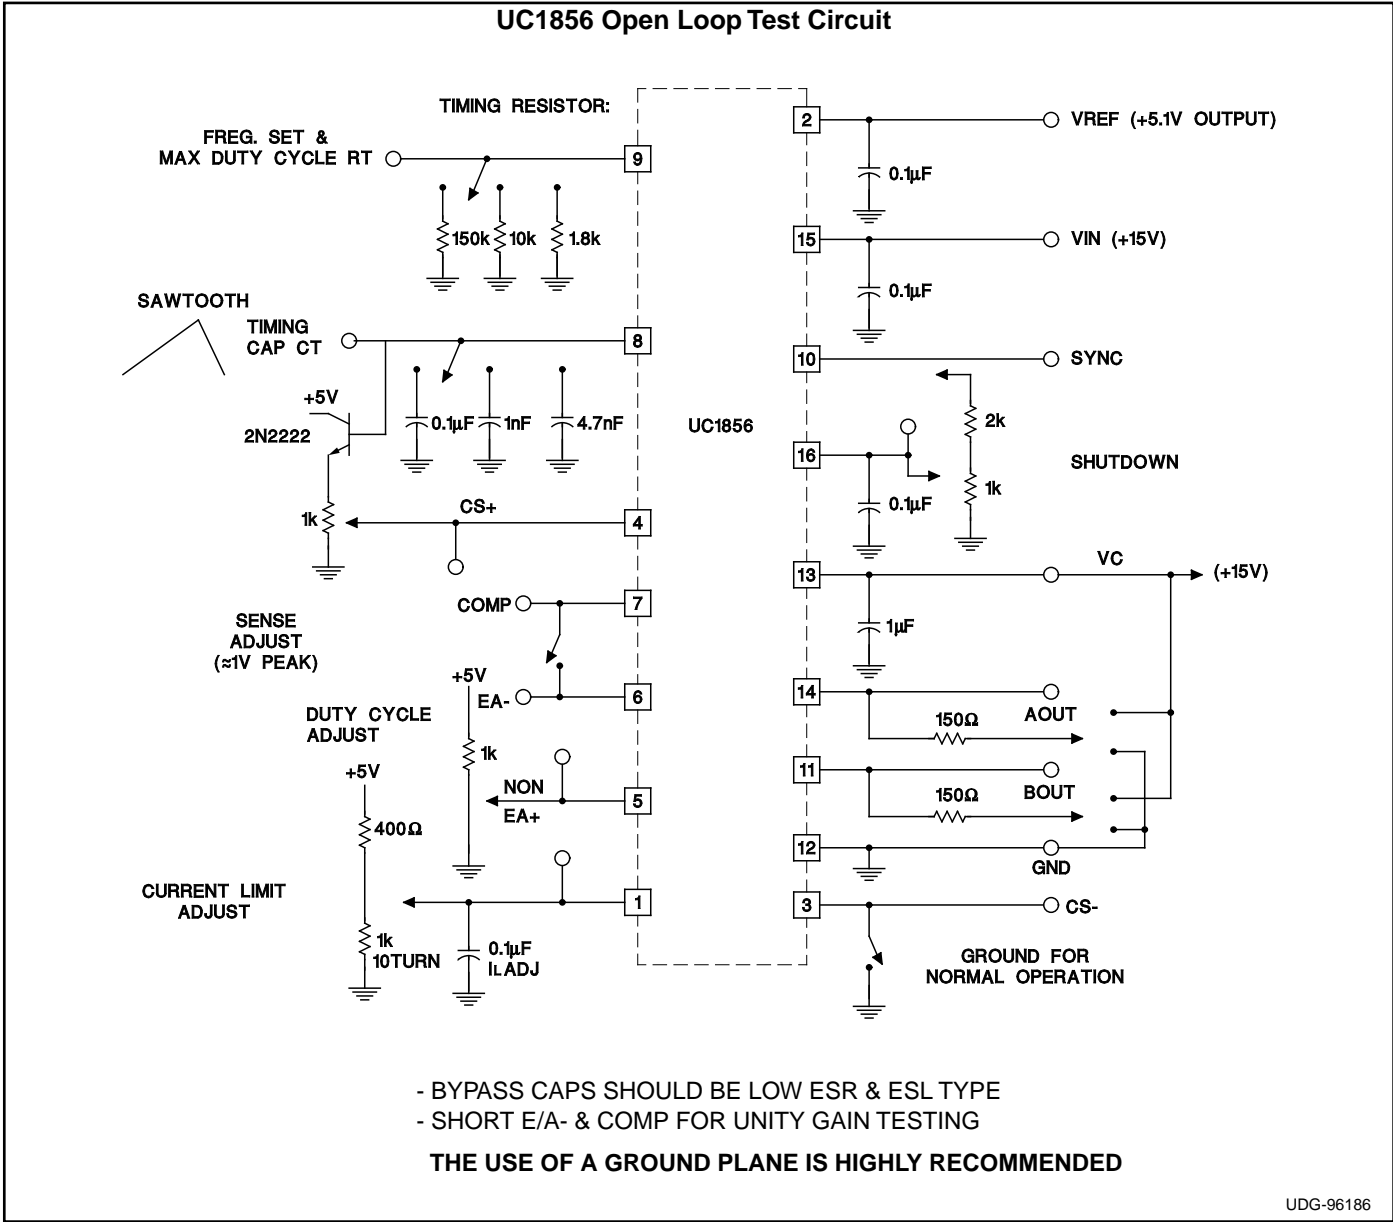

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| 5962-9453001M2A | ACTIVE | LCCC | FK | 20 | 1 | TBD | POST-PLATE | N / A for Pkg Type |
| 5962-9453001MEA | ACTIVE | CDIP | J | 16 | 1 | TBD | A42 | N / A for Pkg Type |
| UC1856J | ACTIVE | CDIP | J | 16 | 1 | TBD | A42 | N / A for Pkg Type |
| UC1856J883B | ACTIVE | CDIP | J | 16 | 1 | TBD | A42 | N / A for Pkg Type |
| UC1856L | OBSOLETE | TO/SOT | L | 28 | | TBD | Call TI | Call TI |
| UC1856L20 | ACTIVE | LCCC | FK | 20 | 1 | TBD | POST-PLATE | N / A for Pkg Type |
| UC1856L20883B | ACTIVE | LCCC | FK | 20 | 1 | TBD | POST-PLATE | N / A for Pkg Type |
| UC1856L883B | OBSOLETE | TO/SOT | L | 28 | | TBD | Call TI | Call TI |
| UC2856DW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UC2856DWG4 | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UC2856DWTR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UC2856DWTRG4 | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UC2856J | ACTIVE | CDIP | J | 16 | 1 | TBD | A42 | N / A for Pkg Type |
| UC2856N | ACTIVE | PDIP | N | 16 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| UC2856NG4 | ACTIVE | PDIP | N | 16 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| UC3856DW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UC3856DWG4 | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UC3856DWTR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UC3856DWTRG4 | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UC3856N | ACTIVE | PDIP | N | 16 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| UC3856NG4 | ACTIVE | PDIP | N | 16 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| UC3856Q | ACTIVE | PLCC | FN | 20 | 46 | Green (RoHS & no Sb/Br) | CU SN | Level-2-260C-1 YEAR |
| UC3856QG3 | ACTIVE | PLCC | FN | 20 | 46 | Green (RoHS & no Sb/Br) | CU SN | Level-2-260C-1 YEAR |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements

for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF UC1856, UC2856, UC2856M, UC3856 :

- Automotive: [UC2856-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

TAPE AND REEL INFORMATION



QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| UC2856DWTR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.85 | 10.8 | 2.7 | 12.0 | 16.0 | Q1 |
| UC3856DWTR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.85 | 10.8 | 2.7 | 12.0 | 16.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| UC2856DWTR | SOIC | DW | 16 | 2000 | 346.0 | 346.0 | 33.0 |
| UC3856DWTR | SOIC | DW | 16 | 2000 | 346.0 | 346.0 | 33.0 |

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| Products | | Applications | |
|-----------------------------|--|----------------------------|--|
| Amplifiers | amplifier.ti.com | Audio | www.ti.com/audio |
| Data Converters | dataconverter.ti.com | Automotive | www.ti.com/automotive |
| DLP® Products | www.dlp.com | Communications and Telecom | www.ti.com/communications |
| DSP | dsp.ti.com | Computers and Peripherals | www.ti.com/computers |
| Clocks and Timers | www.ti.com/clocks | Consumer Electronics | www.ti.com/consumer-apps |
| Interface | interface.ti.com | Energy | www.ti.com/energy |
| Logic | logic.ti.com | Industrial | www.ti.com/industrial |
| Power Mgmt | power.ti.com | Medical | www.ti.com/medical |
| Microcontrollers | microcontroller.ti.com | Security | www.ti.com/security |
| RFID | www.ti-rfid.com | Space, Avionics & Defense | www.ti.com/space-avionics-defense |
| RF/IF and ZigBee® Solutions | www.ti.com/lprf | Video and Imaging | www.ti.com/video |
| | | Wireless | www.ti.com/wireless-apps |