

Features:

- High voltage surge handling per IEC 60065.14.1, up to 7KV
- High tolerance to prolonged exposure to temperature and humidity stress
- Ideal for applications requiring high stability, reliability and voltage handling; including power inverters, AC adapters and switching power supplies
- RoHS compliant, lead free and halogen free



| Electrical Specifications | | | | | |
|---------------------------|-----------------------------|--|--------------------------|------------------------------------|-------------------------------|
| Type / Code | Power Rating (Watts) @ 70°C | Maximum Working Voltage ⁽¹⁾ | Maximum Overload Voltage | Resistance Temperature Coefficient | Ohmic Range (Ω) and Tolerance |
| | | | | | 1% and 5% |
| RNV14 | 0.25W | 1600V (DC), 1150V (RMS) | 3200V (DC), 2300V (RMS) | ±100 ppm/°C | 100K - 6.8M |
| | | | | | ±200 ppm/°C |

Note: (1) Lesser of $\sqrt{P \cdot R}$ or maximum working voltage


| Mechanical Specifications | | | | | |
|---------------------------|---------------|---------------|---------------|---------------|--------------|
| | | | | | |
| Type / Code | L | D | d | H | Unit |
| RNV14 | 0.236 ± 0.012 | 0.094 ± 0.008 | 0.022 ± 0.002 | 1.102 ± 0.079 | inches mm |
| | 6.00 ± 0.30 | 2.40 ± 0.20 | 0.55 ± 0.05 | 28.00 ± 2.00 | |

| Packaging Specifications | | | | | | |
|--------------------------|-----------------------|----------------|---------------|------------------|---------------|--------------|
| | | | | | | |
| Type / Code | A max. ⁽¹⁾ | B max. | C | D ⁽²⁾ | Tape | Unit |
| RNV14 | 2.756 ± 0.118 | 11.811 ± 0.197 | 0.197 ± 0.020 | 2.047 ± 0.020 | 0.250 6.35 | inches mm |
| | 70.00 ± 3.00 | 300.00 ± 5.00 | 5.00 ± 0.50 | 52.00 ± 0.50 | | |

Dimension "E": This is a non-critical dimension that does not have a tolerance in the standard.


Range of diameters is from 0.547" (13.9 mm) to 1.5" (38.1 mm)

- (1) Reference value only. The "A" dimension shall be governed by the overall length of the taped component. The distance between flanges shall be 0.59" (1.5 mm) to 0.315" (8 mm) greater than the overall component.
- (2) The given dimension "D" expresses the standard width spacing. A 26 mm narrow spacing is available as option "N" packaging code.
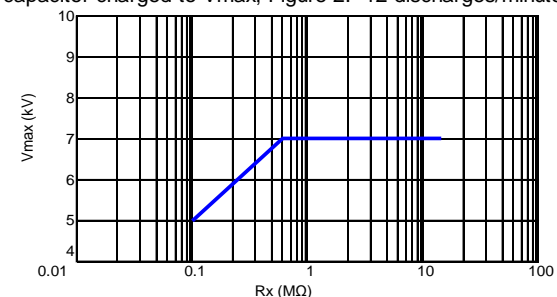
| Performance Characteristics | | |
|--|---|--|
| Item | Performance | Test Method |
| Solvent Resistance | No serious scratches on the insulating surface | Resistor was dipped into solvent for 5 ± 0.5 minutes |
| Temperature Coefficient Resistance (TCR) | ±100 ppm/°C (100K - 6.8M) ±200 ppm/°C (100K - 15M) | Measured resistance (R ₀ ohm) at room temperature (t °C) then measured again at 100°C higher than room temperature $\text{ppm/}^\circ\text{C} = (R - R_0) / R_0 \times 10^6 / \{(T + 100) - t\}$ |
| Overload (short time) | Resistance variation within ±(1% + 0.05Ω) | Applied DC voltage 2.5 times rated voltage or max. overload voltage whichever is lower for 5 seconds ON, 45 seconds OFF. Repeated cycle 10 times. Maximum Overload voltage is not more than 2 x Max Working Voltage |
| Voltage Proof | Resistance variation within ±(0.5% + 0.05Ω) | Resistor was clamped in the through of a 90°C metallic V-block and was tested at provided AC potential voltage for 1 minute. Test voltage: max overload voltage. Test voltage: 500V (AC) |
| Vibration | Resistance variation within ±(0.5% + 0.05Ω) | Applied 1.5mm amplitude vibration to two directions, perpendicular to each other, for 6 hours each. Total 12 hours. Vibrating frequency is 10HZ - 2000HZ - 10HZ cycle in 20 minutes. Repeat cycle. |
| Insulation Resistance | 104 MΩ or more | Resistor was clamped in the through of a 90°C metallic V-block at DC 100V for 1 minute |
| Robustness of Terminations | Resistance variation within ±(0.5% + 0.05Ω) and no mechanical damage | Tensile test: The body of the part is fixed. The tensile force was applied gradually up to 10N. Twist test: Terminal lead was rotated 360° of the original axis of the bent terminal, alternating direction for 3 rotations. |
| Resistance to Soldering Heat | No mechanical and electrical deterioration | Resistance to wave soldering condition: Temperature/Time-Profile in accordance to the CECC00802. Max Temperature/Time: 260°C, 10 seconds |
| Solderability | More than 95% of the lead surface was covered by new solder after the leads were dipped in the solder | Dipped the lead into a solder bath (temperature 245°C ± 5°C) up to 4 ± 0.8mm from the resistor body and held for 5 ± 0.5 seconds. |
| Rapid Change of Temperature | Resistance variation within ±(0.5% + 0.05Ω) | Test: -55°C for 30 minutes, 25°C for 30 seconds, 155°C for 30 minutes, 25°C for 30 seconds. Resistance changed after continuous 5 cycles. |
| Damp Heat | Resistance variation within ±(1.5% + 0.05Ω) | Temperature 40°C ± 2°C, relative humidity 90~95%, inside bath for 1.5 hour and shut voltage 0.5 hour. Repeated cycle for 1,000 hours. Room temperature for 1 hour after test, then measured |
| Endurance at 70°C | Resistance variation within ±(1.5% + 0.05Ω) | In constant temperature chamber 70°C ± 2°C, applied rated DC voltage for 1.5 hour and shut voltage for 0.5 hour. Cycle repeated for 1,000 hours. |
| Cold Resistance | Resistance variation within ±(1.5% + 0.05Ω) | Resistor was put into a bath at fixed temp of -55°C ± 3°C for 2 hours. After measured, left at room temp for 1 hour, then measured again. |
| Heat Resistance | Resistance variation within ±(1.5% + 0.05Ω) | Resistor was put into a bath at fixed temp of 155°C ± 3°C for 16 hours. After measured, left at room temp for 1 hour, then measured again. |
| High Voltage Surge Test | Resistance variation within ±(1% + 0.05Ω) | In accordance with IEC60065.14.1, 50 discharges from a 1nF capacitor charged to Vmax; Figure 2. 12 discharges/minute  |

Operating Temperature Range: -55°C to +155°C

Power Derating Curve:

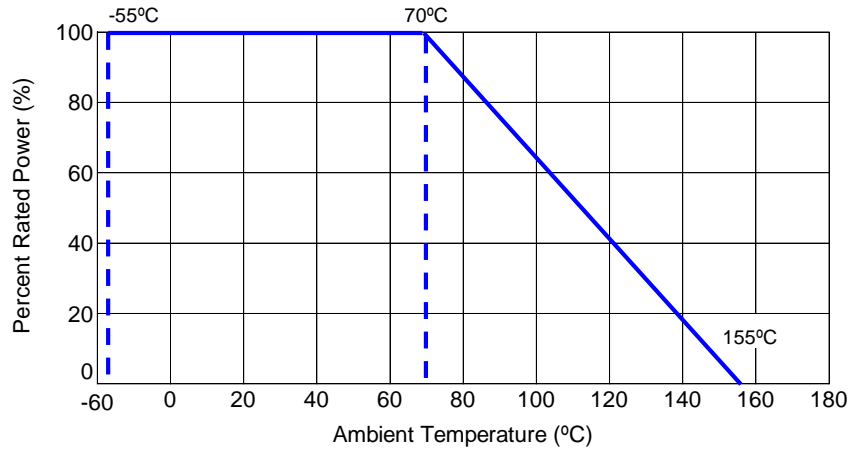

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

| RoHS Compliance Status | | | | | | |
|-------------------------|--|----------------------------|--------------------------------|-----------------------------------|--|---------------------------------------|
| Standard Product Series | Description | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition | Lead-Free Mfg. Effective Date (Std Product Series) | Lead-Free Effective Date Code (YY/WW) |
| RNV | High Voltage Anti-Moisture Metal Film Resistor | Axial | YES | 100% Matte Sn over Ni | Always | Always |

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

RNV Series

High Voltage Anti-moisture Metal Film Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

How to Order

