
- Function, Pinout, and Drive Compatible With FCT and F Logic
- Reduced V_{OH} (Typically = 3.3 V) Versions of Equivalent FCT Functions
- Edge-Rate Control Circuitry for Significantly Improved Noise Characteristics
- I_{off} Supports Partial-Power-Down Mode Operation
- Matched Rise and Fall Times
- Fully Compatible With TTL Input and Output Logic Levels
- ESD Protection Exceeds JESD 22
 - 2000-V Human-Body Model (A114-A)
 - 200-V Machine Model (A115-A)
 - 1000-V Charged-Device Model (C101)
- Independent Register for A and B Buses
- CY54FCT646T
 - 48-mA Output Sink Current
 - 12-mA Output Source Current
- CY74FCT646T
 - 64-mA Output Sink Current
 - 32-mA Output Source Current
- 3-State Outputs


description

The 'FCT646T devices consist of a bus transceiver circuit with 3-state, D-type flip-flops, and control circuitry arranged for multiplexed transmission of data directly from the input bus or from the internal registers. Data on the A or B bus is clocked into the registers as the appropriate

CY54FCT646T...D PACKAGE CY74FCT646T...Q OR SO PACKAGE (TOP VIEW)



CY54FCT646T ... L PACKAGE (TOP VIEW)



NC - No internal connection

clock pin goes to a high logic level. Output-enable (\overline{G}) and direction (DIR) inputs control the transceiver function. In the transceiver mode, data present at the high-impedance port can be stored in either the A or B register, or in both. Select controls (SAB, SBA) can multiplex stored and real-time (transparent mode) data. DIR determines which bus receives data when \overline{G} is low. In the isolation mode (\overline{G}) is high), A data can be stored in the B register and/or B data can be stored in the A register.

These devices are fully specified for partial-power-down applications using I_{off}. The I_{off} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



CY54FCT646T, CY74FCT646T 8-BIT REGISTERED TRANSCEIVERS WITH 3-STATE OUTPUTS

SCCS031A - JULY 1994 - REVISED OCTOBER 2001

PIN DESCRIPTION

NAME	DESCRIPTION
Α	Data register A inputs, data register B outputs
В	Data register B inputs, data register A outputs
CPAB, CPBA	Clock-pulse inputs
SAB, SBA	Output data-source-select inputs
DIR, G	Output-enable inputs

ORDERING INFORMATION

TA	PACI	KAGE†	SPEED (ns)	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	QSOP - Q	Tape and reel	5.4	CY74FCT646CTQCT	FCT646C
	SOIC - SO	SOIC SO Tube		CY74FCT646CTSOC	FCT646C
	3010 - 30	Tape and reel	5.4	CY74FCT646CTSOCT	FC1046C
	QSOP - Q	Tape and reel	6.3	CY74FCT646ATQCT	FCT646A
–40°C to 85°C	SOIC - SO	Tube	6.3	CY74FCT646ATSOC	FCT646A
	3010 - 30	Tape and reel	6.3	CY74FCT646ATSOCT	FC1046A
	QSOP - Q	Tape and reel	9	CY74FCT646TQCT	FCT646
	SOIC - SO	Tube	9	CY74FCT646TSOC	FCT646
	3010 - 30	Tape and reel	9	CY74FCT646TSOCT	FC1046
	LCC – L	Tube	6	CY54FCT646CTLMB	
–55°C to 125°C	CDIP – D	Tube	7.7	CY54FCT646ATDMB	
-55 0 10 125 0	LCC – L	Tube	7.7	CY54FCT646ATLMB	
	LCC - L	Tube	11	CY54FCT646TLMB	

[†] Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

FUNCTION TABLE

		INP	UTS			DATA	\ I/O‡	OPERATION
G	DIR	CPAB	СРВА	SAB	SBA	A ₁ -A ₈	B ₁ -B ₈	OR FUNCTION
Н	Х	H or L	H or L	Х	Х	Input	Input	Isolation
Н	Χ	1	1	Χ	X	Input	Input	Store A and B data
L	L	Χ	Х	Χ	L	Output	Input	Real-time B data to A bus
L	L	Χ	H or L	Χ	Н	Output	Input	Stored B data to A bus
L	Н	Х	Х	L	Х	Input	Output	Real-time A data to B bus
L	Н	H or L	Χ	Н	Χ	Input	Output	Stored A data to B bus

H = High logic level, L = Low logic level, ↑ = Low-to-high transition, X = Don't care



[‡] The data output functions can be enabled or disabled by various signals at the \overline{G} or DIR inputs. Data input functions always are enabled, i.e., data at the bus pins is stored on every low-to-high transition of the clock inputs.


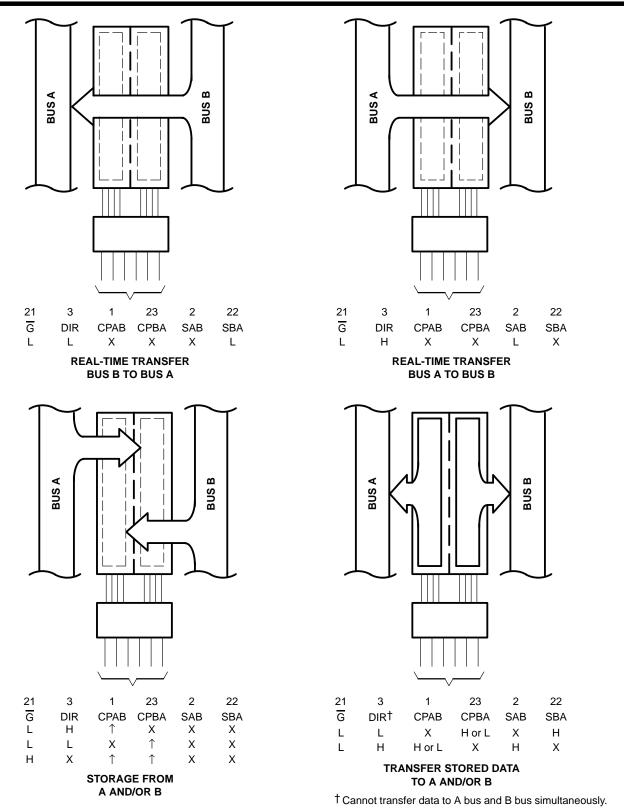


Figure 1. Bus-Management Functions



logic diagram (positive logic)

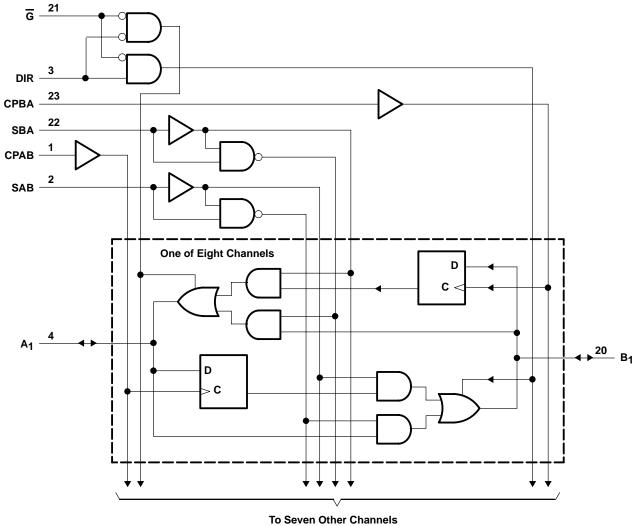

Pin numbers shown are for the Q and SO packages.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage range to ground potential	\dots –0.5 V to 7 V
DC input voltage range	\dots –0.5 V to 7 V
DC output voltage range	\dots –0.5 V to 7 V
DC output current (maximum sink current/pin)	120 mA
Package thermal impedance, θ _{JA} (see Note 1): Q package	61°C/W
SO package	46°C/W
Ambient temperature range with power applied, T _A	–65°C to 135°C
Storage temperature range, T _{stq}	-65° C to 150° C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The package thermal impedance is calculated in accordance with JESD 51-7.



recommended operating conditions (see Note 2)

		CY54FCT646T			CY7	6T	UNIT	
		MIN	NOM	MAX	MIN	NOM	MAX	UNII
VCC	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
VIH	High-level input voltage	2			2			V
VIL	Low-level input voltage			0.8			0.8	V
loh	High-level output current			-12			-32	mA
l _{OL}	Low-level output current			48			64	mA
T _A	Operating free-air temperature	-55		125	-40		85	°C

NOTE 2: All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation.

CY54FCT646T, CY74FCT646T 8-BIT REGISTÉRED TRANSCEIVERS WITH 3-STATE OUTPUTS

SCCS031A - JULY 1994 - REVISED OCTOBER 2001

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

242445752		OT CONDITION		CY	54FCT64	ŀ6T	CY	74FCT64	6T	
PARAMETER		ST CONDITIONS	5	MIN	TYP [†]	MAX	MIN	TYP [†]	MAX	UNIT
Vive	V _{CC} = 4.5 V,	$I_{IN} = -18 \text{ mA}$			-0.7	-1.2				V
VIK	V _{CC} = 4.75 V,	$I_{IN} = -18 \text{ mA}$						-0.7	-1.2	V
	$V_{CC} = 4.5 \text{ V},$	$I_{OH} = -12 \text{ mA}$		2.4	3.3					
Voн	V _{CC} = 4.75 V	$I_{OH} = -32 \text{ mA}$					2			V
	VCC = 4.75 V	$I_{OH} = -15 \text{ mA}$					2.4	3.3		
Vai	$V_{CC} = 4.5 \text{ V},$	I _{OL} = 48 mA			0.3	0.55				V
VOL	V _{CC} = 4.75 V,	I _{OL} = 64 mA						0.3	0.55	V
V_{hys}	All inputs				0.2			0.2		V
1.	$V_{CC} = 5.5 \text{ V},$	VIN = VCC				5				μА
lį	$V_{CC} = 5.25 \text{ V},$	VIN = VCC							5	μΑ
l., .	$V_{CC} = 5.5 \text{ V},$	$V_{1N} = 2.7 \text{ V}$				±1				μА
ЧH	$V_{CC} = 5.25 \text{ V},$								±1	μΛ
IIL	$V_{CC} = 5.5 \text{ V},$	$V_{IN} = 0.5 V$				±1				μА
'IL	$V_{CC} = 5.25 \text{ V},$	$V_{IN} = 0.5 V$							±1	μΛ
lozu	$V_{CC} = 5.5 \text{ V},$	V _{OUT} = 2.7 V				10				μА
lozh	$V_{CC} = 5.25 \text{ V},$	V _{OUT} = 2.7 V							10	μΛ
I _{OZL}	$V_{CC} = 5.5 \text{ V},$	V _{OUT} = 0.5 V				-10				μΑ
IOZL	$V_{CC} = 5.25 \text{ V},$	V _{OUT} = 0.5 V							-10	μΑ
los‡	$V_{CC} = 5.5 \text{ V},$	V _{OUT} = 0 V		-60	-120	-225				mA
105+	$V_{CC} = 5.25 \text{ V},$	V _{OUT} = 0 V					-60	-120	-225	ША
l _{off}	$V_{CC} = 0 V$	V _{OUT} = 4.5 V				±1			±1	μΑ
loo	$V_{CC} = 5.5 \text{ V},$				0.1	0.2				mA
Icc	$V_{CC} = 5.25 \text{ V},$	$V_{IN} \le 0.2 V$,	$V_{IN} \ge V_{CC} - 0.2 \text{ V}$					0.1	0.2	ША
A1	$V_{CC} = 5.5 \text{ V}, V_{IN} = 3.4$	V , $f_1 = 0$, Outp	uts open		0.5	2				A
ΔICC	V _{CC} = 5.25 V, V _{IN} = 3	.4 V§, f ₁ = 0, Out	puts open					0.5	2	mA
loop¶	$V_{CC} = 5.5 \text{ V}$, One input Outputs open, $\overline{G} = \text{DIR}$ $V_{IN} \le 0.2 \text{ V}$ or $V_{IN} \ge V_{IN}$	$R = GND, SAB = \overline{S}$			0.06	0.12				mA/
ICCD¶	$V_{CC} = 5.25 \text{ V}, \text{ One inp}$ Outputs open, $\overline{G} = \text{DIR}$ $V_{IN} \le 0.2 \text{ V or } V_{IN} \ge V_{IN}$	R = GND, SAB = S						0.06	0.12	MHz

[†] Typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$.



[‡] Not more than one output should be shorted at a time. Duration of short should not exceed one second. The use of high-speed test apparatus and/or sample-and-hold techniques are preferable to minimize internal chip heating and more accurately reflect operational values. Otherwise, prolonged shorting of a high output can raise the chip temperature well above normal and cause invalid readings in other parametric tests. In any sequence of parameter tests, IOS tests should be performed last.

[§] Per TTL-driven input (V_{IN} = 3.4 V); all other inputs at V_{CC} or GND

[¶] This parameter is derived for use in total power-supply calculations.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted) (continued)

DADAMETED		CT CONDITION	0	CY	54FCT64	16T	CY	74FCT64	6T	LINIT
PARAMETER	11	EST CONDITION	5	MIN	TYP [†]	MAX	MIN	TYP [†]	MAX	UNIT
		One bit switching at f ₁ = 5 MHz	$V_{IN} \le 0.2 \text{ V or}$ $V_{IN} \ge V_{CC} - 0.2 \text{ V}$		0.7	1.4				
	$V_{CC} = 5.5 \text{ V},$ $f_0 = 10 \text{ MHz},$ Outputs open,	at 50% duty cycle	V _{IN} = 3.4 V or GND		1.2	3.4				mA
	G = DIR = GND, SAB = SBA = GND	Eight bits switching at f ₁ = 5 MHz	$V_{IN} \le 0.2 \text{ V or}$ $V_{IN} \ge V_{CC} - 0.2 \text{ V}$		2.8	5.6				IIIA
IC#		at 50% duty cycle	V _{IN} = 3.4 V or GND		5.1	14.6				
10"	V - 55-V	One bit switching at f ₁ = 5 MHz	$V_{IN} \le 0.2 \text{ V or}$ $V_{IN} \ge V_{CC} - 0.2 \text{ V}$					0.7	1.4	
	$V_{CC} = 5.25 \text{ V},$ $f_0 = 10 \text{ MHz},$ Outputs open,	at 50% duty cycle	V _{IN} = 3.4 V or GND					1.2	3.4	mA
	G = DIR = GND, SAB = SBA = GND	Eight bits switching at f ₁ = 5 MHz	$V_{IN} \le 0.2 \text{ V or}$ $V_{IN} \ge V_{CC} - 0.2 \text{ V}$					2.8	5.6	ША
		at 50% duty cycle	V _{IN} = 3.4 V or GND					5.1	14.6	
C _i					6	10		6	10	pF
Co					8	12		8	12	pF

 $^{^{\#}}$ IC = ICC + Δ ICC × D_H × N_T + ICCD(f₀/2 + f₁ × N₁)

Where:

IC = Total supply current

ICC = Power-supply current with CMOS input levels

 ΔI_{CC} = Power-supply current for a TTL high input (V_{IN} = 3.4 V)

D_H = Duty cycle for TTL inputs high N_T = Number of TTL inputs at D_H

ICCD = Dynamic current caused by an input transition pair (HLH or LHL)

f₀ = Clock frequency for registered devices, otherwise zero

f₁ = Input signal frequency

 N_1 = Number of inputs changing at f_1

All currents are in milliamperes and all frequencies are in megahertz.

 \parallel Values for these conditions are examples of the ICC formula.



CY54FCT646T, CY74FCT646T 8-BIT REGISTERED TRANSCEIVERS WITH 3-STATE OUTPUTS

SCCS031A - JULY 1994 - REVISED OCTOBER 2001

timing requirements over recommended operating free-air temperature range (unless otherwise noted) (see Figure 2)

		CY54FCT646T		CY54FC1	7646AT	CY54FCT	646CT	UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	UNIT
t_W	Pulse duration	6		5		5		ns
t _{su}	Setup time, data before CPAB↑ or CPBA↑	4.5		2		2		ns
t _h	Hold time, data after CPAB↑ or CPBA↑	2		1.5		1.5		ns

timing requirements over recommended operating free-air temperature range (unless otherwise noted) (see Figure 2)

		CY74FCT646T		CY74FC	Г646AT	CY74FCT	646CT	UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	UNIT
t _W	Pulse duration	6		5		5		ns
t _{su}	Setup time, data before CPAB↑ or CPBA↑	4		2		2		ns
t _h	Hold time, data after CPAB↑ or CPBA↑	2		1.5		1.5		ns

switching characteristics over operating free-air temperature range (see Figure 2)


PARAMETER	FROM	то	CY54FC	T646T	CY54FC	Г646AT	CY54FC1	646CT	UNIT
PARAMETER	(INPUT)	(OUTPUT)	MIN	MAX	MIN	MAX	MIN	MAX	UNII
^t PLH	A or B	B or A	2	11	2	7.7	1.5	6	ns
t _{PHL}	AUB	BUIA	2	11	2	7.7	1.5	6	115
^t PZH	DIR	A or B	2	15	2	10.5	1.5	8.9	ns
t _{PZL}	DIK	AUIB	2	15	2	10.5	1.5	8.9	115
^t PHZ	G and DIR	A or B	2	11	2	7.7	1.5	7.7	ns
t _{PLZ}	G and DIK	AUID	2	11	2	7.7	1.5	7.7	115
^t PLH	CPAB or CPBA	A or B	2	10	2	7	1.5	6.3	ns
^t PHL	CFAB OI CFBA	AUID	2	10	2	7	1.5	6.3	115
^t PLH	SBA or SAB	A or B	2	12	2	8.4	1.5	7	200
^t PHL	SBA UI SAB	AUID	2	12	2	8.4	1.5	7	ns

switching characteristics over operating free-air temperature range (see Figure 2)

PARAMETER	FROM	то	CY74FC	T646T	CY74FC	Г646АТ	CY74FC1	Г646CT	UNIT
PARAMETER	(INPUT)	(OUTPUT)	MIN	MAX	MIN	MAX	MIN	MAX	UNII
t _{PLH}	A or B	B or A	1.5	9	1.5	6.3	1.5	5.4	ns
^t PHL	AOIB	BULK	1.5	9	1.5	6.3	1.5	5.4	115
^t PZH	DIR	A or B	1.5	14	1.5	9.8	1.5	7.8	ns
tpzL	DIK	AUIB	1.5	14	1.5	9.8	1.5	7.8	115
t _{PHZ}	G and DIR	A or B	1.5	9	1.5	6.3	1.5	6.3	ns
t _{PLZ}	G and DIK	AUID	1.5	9	1.5	6.3	1.5	6.3	115
t _{PLH}	CPAB or CPBA	A or B	1.5	9	1.5	6.3	1.5	5.7	ns
t _{PHL}	CFAB OI CFBA	AOIB	1.5	9	1.5	6.3	1.5	5.7	115
^t PLH	SBA or SAB	A or B	1.5	11	1.5	7.7	1.5	6.2	ns
^t PHL	3BA 01 3AB	AOIB	1.5	11	1.5	7.7	1.5	6.2	115



PARAMETER MEASUREMENT INFORMATION

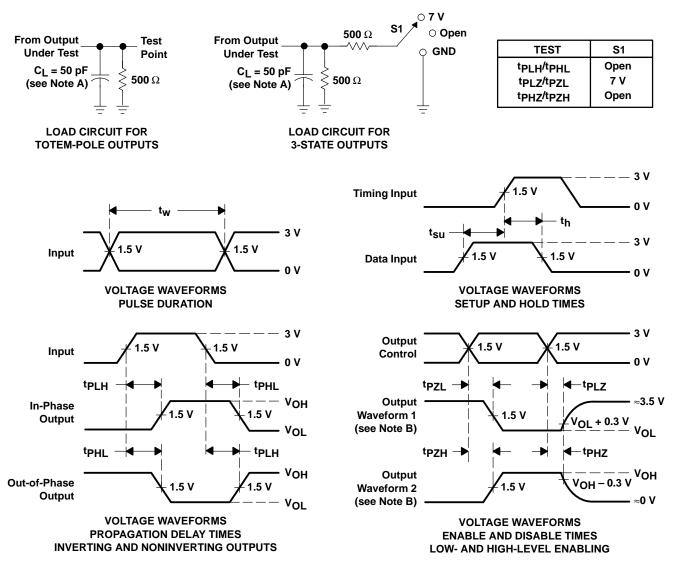

NOTES: A. C_L includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. The outputs are measured one at a time with one input transition per measurement.

Figure 2. Load Circuit and Voltage Waveforms



PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	n MSL Peak Temp ⁽³⁾
5962-9222301M3A	ACTIVE	LCCC	FK	28	1	TBD	POST-PLATE	N / A for Pkg Type
5962-9222303M3A	ACTIVE	LCCC	FK	28	1	TBD	POST-PLATE	N / A for Pkg Type
5962-9222303MLA	ACTIVE	CDIP	JT	24	1	TBD	A42 SNPB	N / A for Pkg Type
5962-9222305M3A	ACTIVE	LCCC	FK	28	1	TBD	POST-PLATE	N / A for Pkg Type
CY54FCT646ATDMB	ACTIVE	CDIP	JT	24	1	TBD	A42 SNPB	N / A for Pkg Type
CY54FCT646ATLMB	ACTIVE	LCCC	FK	28	1	TBD	POST-PLATE	N / A for Pkg Type
CY54FCT646CTLMB	ACTIVE	LCCC	FK	28	1	TBD	POST-PLATE	N / A for Pkg Type
CY74FCT646ATQCT	ACTIVE	SSOP/ QSOP	DBQ	24	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
CY74FCT646ATQCTE4	ACTIVE	SSOP/ QSOP	DBQ	24	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
CY74FCT646ATQCTG4	ACTIVE	SSOP/ QSOP	DBQ	24	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
CY74FCT646ATSOC	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646ATSOCE4	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646ATSOCG4	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646ATSOCT	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646ATSOCTE4	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646ATSOCTG4	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646CTQCT	ACTIVE	SSOP/ QSOP	DBQ	24	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
CY74FCT646CTQCTE4	ACTIVE	SSOP/ QSOP	DBQ	24	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
CY74FCT646CTQCTG4	ACTIVE	SSOP/ QSOP	DBQ	24	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
CY74FCT646CTSOC	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646CTSOCE4	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646CTSOCG4	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646CTSOCT	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646CTSOCTE4	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646CTSOCTG4	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646TQCT	ACTIVE	SSOP/ QSOP	DBQ	24	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
CY74FCT646TQCTE4	ACTIVE	SSOP/ QSOP	DBQ	24	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
CY74FCT646TQCTG4	ACTIVE	SSOP/	DBQ	24	2500	Green (RoHS &	CU NIPDAU	Level-2-260C-1 YEAR



PACKAGE OPTION ADDENDUM

9-Oct-2007

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
		QSOP				no Sb/Br)		
CY74FCT646TSOC	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646TSOCE4	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646TSOCG4	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646TSOCT	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646TSOCTE4	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
CY74FCT646TSOCTG4	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



4-Oct-2007


TAPE AND REEL BOX INFORMATION

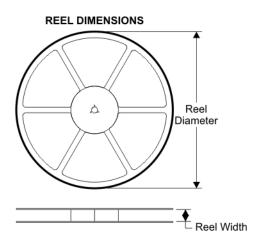




A0	Dimension designed to accommodate the component width
	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



Device	Package	Pins		Reel Diameter (mm)	Reel Width (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CY74FCT646ATQCT	DBQ	24	SITE 41	330	16	6.5	9.0	2.1	8	16	Q1
CY74FCT646ATSOCT	DW	24	SITE 60	330	24	10.75	15.7	2.7	12	24	Q1
CY74FCT646CTQCT	DBQ	24	SITE 41	330	16	6.5	9.0	2.1	8	16	Q1
CY74FCT646CTSOCT	DW	24	SITE 60	330	24	10.75	15.7	2.7	12	24	Q1
CY74FCT646TQCT	DBQ	24	SITE 41	330	16	6.5	9.0	2.1	8	16	Q1
CY74FCT646TSOCT	DW	24	SITE 60	330	24	10.75	15.7	2.7	12	24	Q1



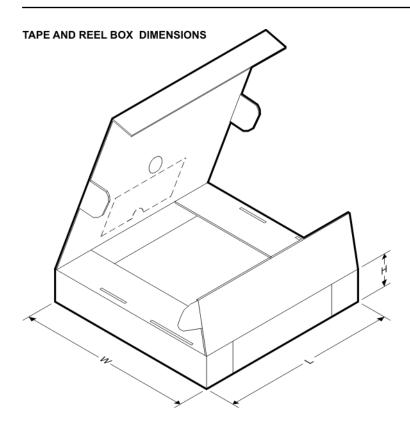

Device	Package	Pins	Site	Length (mm)	Width (mm)	Height (mm)	
CY74FCT646ATQCT	DBQ	24	SITE 41	346.0	346.0	33.0	
CY74FCT646ATSOCT	DW	24	SITE 60	346.0	346.0	41.0	
CY74FCT646CTQCT	DBQ	24	SITE 41	346.0	346.0	33.0	
CY74FCT646CTSOCT	DW	24	SITE 60	346.0	346.0	41.0	
CY74FCT646TQCT	DBQ	24	SITE 41	346.0	346.0	33.0	
CY74FCT646TSOCT	DW	24	SITE 60	346.0	346.0	41.0	

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

	Applications	
amplifier.ti.com	Audio	www.ti.com/audio
dataconverter.ti.com	Automotive	www.ti.com/automotive
dsp.ti.com	Broadband	www.ti.com/broadband
interface.ti.com	Digital Control	www.ti.com/digitalcontrol
logic.ti.com	Military	www.ti.com/military
power.ti.com	Optical Networking	www.ti.com/opticalnetwork
microcontroller.ti.com	Security	www.ti.com/security
www.ti-rfid.com	Telephony	www.ti.com/telephony
www.ti.com/lpw	Video & Imaging	www.ti.com/video
	Wireless	www.ti.com/wireless
	dataconverter.ti.com dsp.ti.com interface.ti.com logic.ti.com power.ti.com microcontroller.ti.com www.ti-rfid.com	amplifier.ti.com dataconverter.ti.com dsp.ti.com interface.ti.com logic.ti.com power.ti.com microcontroller.ti.com www.ti-rfid.com www.ti-com/lpw Audio Automotive Broadband Digital Control Military Optical Networking Security Telephony Video & Imaging

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2007, Texas Instruments Incorporated